



Simpex Electronic AG
Binzackerstrasse 33
CH-8620 Wetzikon
Telefon +41 44 931 10 30

www.simpex.ch
contact@simpex.ch
CHE-108.018.777 MWST



AC↔DC Bidirectional Power Supply with Energy Recycle Function

BIC-2200 series

Dimension

L	*	W	*	H
330	*	140	*	41 (1U) mm
13	*	5.5		1.61 (1U) inch



User's Manual



Video



UL62368-1



BS EN/EN62368-1



TPTC004



IEC62368-1



Features

- 1U low profile design
- Full digital design with 93% conversion efficiency for both AC/DC and DC/AC conversion
- Ultrafast switching time between AC/DC and DC/AC of 1ms
- CB/TUV/UL 62368-1 certified, and design refer to IEC 62477 regulation
- Active current sharing up to 11000W(4+1)
- <3% Low THDi in both conversion mode
- Force charging and discharging mode with CANBus model
- Complete protections: Anti-islanding protection, AC fail protection, DC OVP, OLP, OCP, OTP
- 5 years warranty

Applications

- Battery cell formation & grading
- V2G (Vehicle-to-grid) system
- Marine battery charger module
- Electric scooter or vehicle charger station
- Kinetic energy recovery system
- Electrolysis system
- Wastewater treatment system

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

The BIC-2200 is a 2.2KW bidirectional power supply with energy recycle function. It is fully digital and 1U height designed. It is designed to control the power transferred from AC grid to DC and DC to AC grid for energy recycle. The implementation of a bidirectional power supply of the BIC-2200 allows battery manufactures to charge the battery from AC grid and recycle the DC energy back into AC grid in one single unit. With built-in functions such as active current sharing, remote ON/OFF control and CANBus model available, the BIC-2200 provides vast design flexibility for battery formation & test equipment, V2G(Vehicle-to-grid) system, charging station, laser system and kinetic recovery system.

Model Encoding / Order Information

BIC - 2200 - 12


- Communication protocol option
- Output voltage(12V/24V/48V/96V)
- Output wattage
- Series name

Type	Communication Protocol	Note
Blank	None protocol	In Stock
CAN	CANBus protocol	In Stock


SPECIFICATION

AC to DC Direction	MODEL	BIC-2200-12		BIC-2200-24		BIC-2200-48		BIC-2200-96		
	OUTPUT	DC VOLTAGE	12V		24V		48V		96V	
		RATED CURRENT	180A		90A		45A		22.5A	
		RATED POWER	2160W							
		FULL POWER VOLTAGE RANGE	12 ~ 15V		24 ~ 28V		48 ~ 65V		96 ~ 112V	
		RIPPLE & NOISE (max.) Note.2	160mVp-p		260mVp-p		300mVp-p		480mVp-p	
		VOLTAGE ADJ. RANGE	10 ~ 15V		19 ~ 28V		38 ~ 65V		76 ~ 112V	
		CURRENT RANGE	0 ~ 180A		0 ~ 90A		0 ~ 45A		0 ~ 22.5A	
		VOLTAGE TOLERANCE Note.3	± 1.0%		± 1.0%		± 1.0%		± 1.0%	
		LINE REGULATION	± 0.5%		± 0.5%		± 0.5%		± 0.5%	
	LOAD REGULATION	± 0.5%		± 0.5%		± 0.5%		± 0.5%		
	SETUP, RISE TIME	1800ms, 60ms/230VAC at full load								
	INPUT	AC VOLTAGE RANGE	180 ~ 264VAC							
		FREQUENCY RANGE	47 ~ 63Hz							
		POWER FACTOR (Typ.)	0.98/230VAC at full load							
		EFFICIENCY (Typ.) Note.5	90%		93%		93%		93%	
		AC CURRENT (Typ.)	11A/230VAC							
INRUSH CURRENT (Typ.)		COLD START 35A/230VAC								
LEAKAGE CURRENT		<2mA/230VAC								
TOTAL HARMONIC DISTORTION	<3%(@load=100%/230VAC)									
DC to AC Direction	INPUT (Note.4)	RATED INPUT POWER	1800W							
		FULL POWER VOLTAGE RANGE	12 ~ 15V		24 ~ 28V		48 ~ 65V		96 ~ 112V	
		DC VOLTAGE RANGE	10 ~15V		19 ~ 28V		38 ~ 65V		76 ~ 112V	
		MAX. INPUT CURRENT	150A		75A		37.5A		18.75A	
		RATED OUTPUT POWER (Typ.) (@230V, 50Hz)	1725VA							
	OUTPUT	VOLTAGE RANGE	180 ~ 264VAC determined by AC main							
		FREQUENCY RANGE	47 ~ 63Hz determined by AC main							
		AC CURRENT (Typ.)	7.5A/230VAC							
		POWER FACTOR (Typ.)	0.99/230VAC at full load							
		EFFICIENCY (Typ.) Note.5	90.5%		93%		93%		93%	
		TOTAL HARMONIC DISTORTION	<3%(@load=100%/230VAC)							
		PROTECTION	OVER LOAD	105 ~ 115% rated output power AC to DC Constant current limiting, shut down DC O/P voltage 5 sec. after DC O/P voltage is down low, re-power on to recover DC to AC Not accurable with constant power design						
	SHORT CIRCUIT		Shut down O/P current, re-power on to recover							
	OVER VOLTAGE		17.6 ~ 20.8V		33.6 ~ 39.2V		72.6 ~ 86V		134 ~ 157V	
OVER TEMPERATURE	Protection type : Shut down O/P voltage, re-power on to recover									
ISLANDING PROTECTION	Shut down O/P voltage, recovers automatically after temperature goes down									
ISLANDING PROTECTION	Shut down AC O/P voltage, re-power on to recover									
FUNCTION	REMOTE ON-OFF CONTROL	By electrical signal or dry contact Short: Power ON Open: Power OFF Please refer to the Function Manual infollowing								
	BIDIRECTION SWITCH TIME (Typ.)	1ms								
	ALARM SIGNAL	Isolated TTL signal output for T-Alarm, DC-OK and Fault. Please refer to the Function Manual in following pages								
	AUXILIARY POWER	12V@0.5A tolerance ± 5%, ripple 150mVp-p								
	BATTERY MODE RATED CURRENT(default) Note.7	AC to DC	160A		80A		40A		20A	
		DC to AC	120A		64A		32A		16A	
ENVIRONMENT	WORKING TEMP.	-30 ~ +70℃ (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH non-condensing								
	TEMP. COEFFICIENT	± 0.03%/℃ (0 ~ 45℃)								
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes								
SAFETY & EMC	SAFETY STANDARDS	UL62368-1, CAN/CSA C22.2 No.62368-1,TUV BS EN/EN62368-1, EAC TP TC 004, IEC62477-1(by request) approved								
	WITHSTAND VOLTAGE Note.8	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:500VAC								
	ISOLATION RESISTANCE Note.8	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH								
	EMC EMISSION	BS EN/EN55032								
		Parameter			Standard			Test Level / Note		
		Conducted			BS EN/EN55032 (CISPR32)			Class A		
		Radiated			BS EN/EN55032 (CISPR32)			Class A		
		Harmonic Current			BS EN/EN61000-3-2			Class A		
	EMC IMMUNITY	Voltage Flicker			BS EN/EN61000-3-3			-----		
		BS EN/EN55035, BS EN/EN61000-6-2								
		Parameter			Standard			Test Level / Note		
		ESD			BS EN/EN61000-4-2			Level 3, 8KV air ; Level 2, 4KV contact		
		Radiated			BS EN/EN61000-4-3			Level 3		
		EFT / Burst			BS EN/EN61000-4-4			Level 3		
		Surge			BS EN/EN61000-6-2			2KV/Line-Line 4KV/Line-Earth		
		Conducted			BS EN/EN61000-4-6			Level 3		
		Magnetic Field			BS EN/EN61000-4-8			Level 4		
Voltage Dips and Interruptions			BS EN/EN61000-4-11			>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods				
OTHERS	MTBF	462.9K hrs min. Telcordia SR-332 (Bellcore) ; 46K hrs min. MIL-HDBK-217F (25℃)								
	DIMENSION	330*140*41mm (L*W*H)								
	PACKING	2.9Kg; 4pcs/12.6Kg/1.25CUFT								
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. As a constant power output, the driver will auto derating the current limitation when voltage raise above rated voltage(12V,24V,48V,96V) in order to remain 1800W output. On the other hand, when voltage is below rated voltage(12V,24V,48V,96V), the maximum current limitation will set at Max input current. 5. The efficiency is measured at 75% load. 6. The ambient temperature derating of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 7. CANBus model only. 8. During withstandards voltage and isolation resistance testing, the screw "A" shall be temporarily removed, and shall be installed back after the testing. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx									


BLOCK DIAGRAM

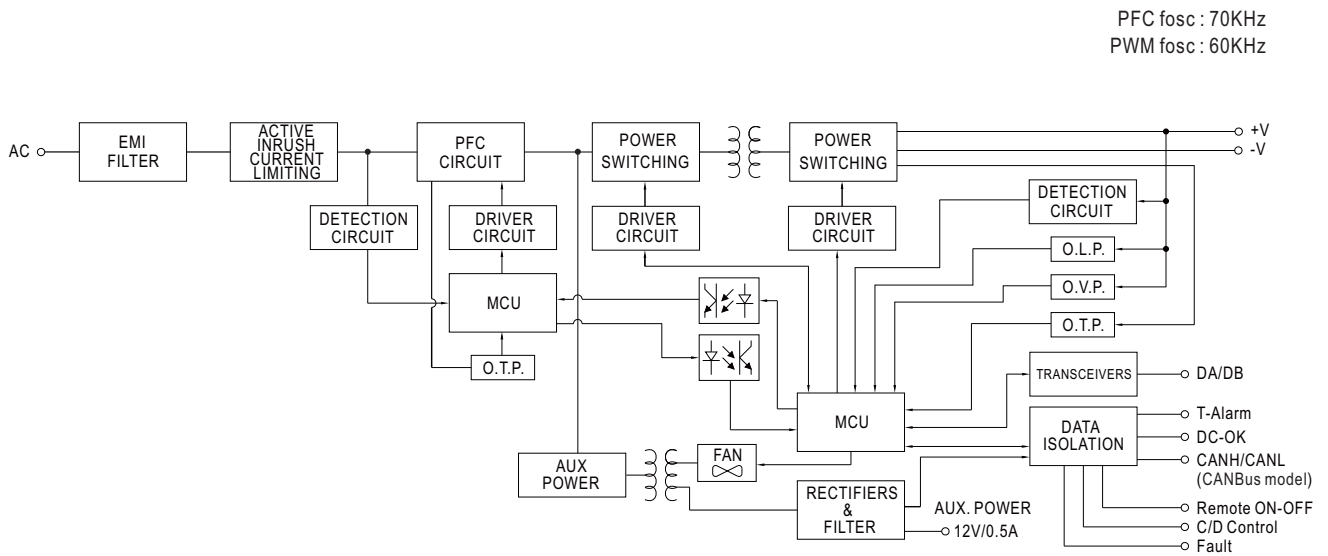

DERATING CURVE

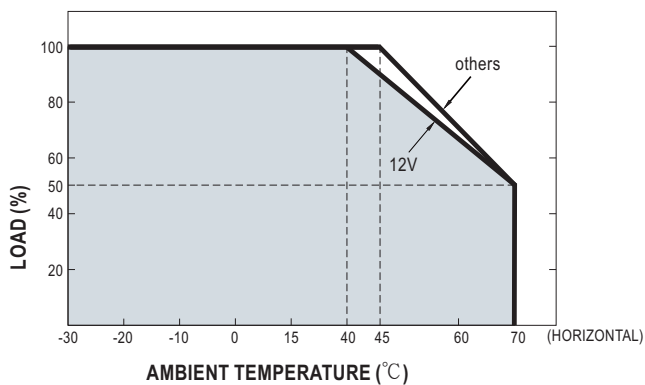


STATIC CHARACTERISTICS

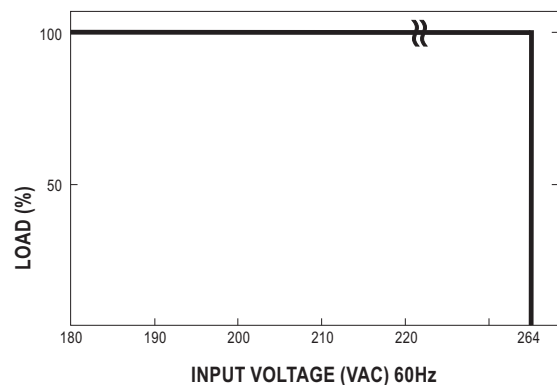

MECHANICAL SPECIFICATION

Case No. 277C

Unit:mm

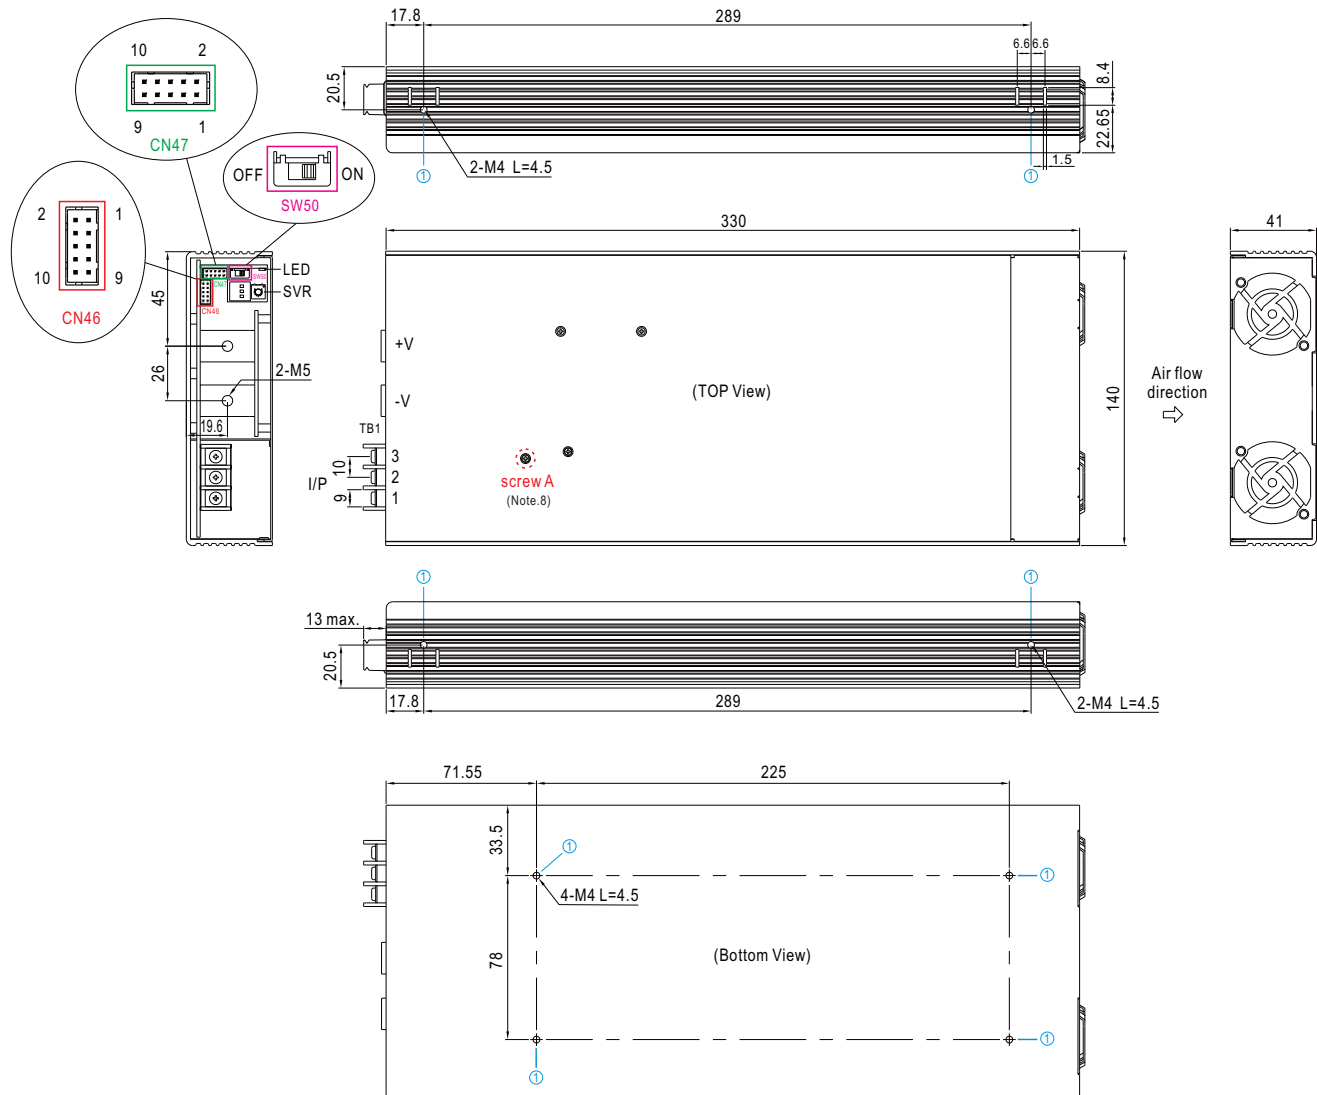

AC Input Terminal(TB1) Pin NO. Assignment

Pin No.	Assignment	Terminal	Max mounting torque
1	AC/L	DECA T35-EO32-03	18Kgf-cm
2	AC/N		
3	FG		

DC Output Terminal Pin No. Assignment

Assignment	Diagram	Maximum mounting torque
+V, -V		10Kgf-cm

※ LED Status Indicators


LED	Description
	Green
	AC to DC Direction, functions as regular power supply.
	DC to AC Direction, functions as grid inverter.
	Red
	Abnormal status (Over temperature protection, Overload protection, Fan fail.)

● Light


Flash

※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M4	4.5mm	7~10Kgf-cm

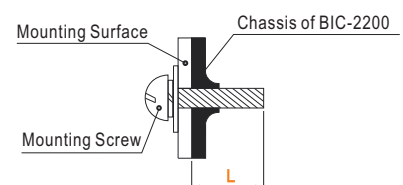

※Control Pin No. Assignment(CN46) : HRS DF11-10DP-2DS or equivalent




Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1	+12V-AUX	Auxiliary voltage output, 11.4~12.6V, referenced to GND-AUX (pin 2,4). The maximum output current is 0.5A. This output is not controlled by the Remote ON/OFF control.
2,4	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
3	+5V-AUX	Auxiliary voltage output, 4.5~5.5V, referenced to GND-AUX (pin 2,4) only for Remote ON/OFF used. This output is not controlled by the Remote ON/OFF control.
5	Remote ON-OFF	The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF and +5V-AUX(pin 3). (Note.1)
6	C/D Control (Note.2)	High (4.5 ~ 5.5V) : Battery Charging mode Low (-0.5 ~ 0.5V) : Battery Discharging mode (Note.1)
7	DC-OK	High (4.5 ~ 5.5V) : When the Vout ≤ 80%±5%. Low (-0.5 ~ 0.5V) : When Vout ≥ 80%±5%. The maximum sourcing current is 4mA and only for output. (Note.1)
8	Fault	High (4.5 ~ 5.5V) : When the Vac ≤ 165Vrms, OLP, SCP, OTP, OVP, AC Fail, fan lock, islanding protection. Low (-0.5 ~ 0.5V) : When Vac ≥ 175Vrms and when power supply work normally. The maximum sourcing current is 4mA and only for output. (Note.1)
9	T-ALARM	High (4.5 ~ 5.5V) : When the internal temperature exceeds the limit of temperature alarm, or when any of the fans fails. Low (-0.5 ~ 0.5V) : When the internal temperature is normal, and when fans work normally. The maximum sourcing current is 4mA and only for output(Note.1)
10	NC	-----

Note 1 : Isolated signal, referenced to GND-AUX.

Note 2 : CANBus model only.

※Control Pin No. Assignment(CN47): HRS DF11-10DP-2DS or equivalent



Mating Housing	HRS DF11-10DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1,2	DA	Differential digital signal for parallel control. (Note.1)
3,4	DB	
5,6	GND	Negative output voltage signal. Certain function reference. It can not be connected directly to the load.
7	CANH (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
8	CANL (CANBus model)	For CANBus model: Data line used in CANBus interface. (Note.2)
9,10	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).

Note 1 : Non-isolated signal, referenced to GND.

Note 2 : Isolated signal, referenced to GND-AUX.

◎ Bidirection process

BIC-2200 possesses AC to DC and DC to AC two way conversion functions. The conversion direction can be automatically detected and controlled by BIC-2200's internal firmware or manually switched by users according to different application requirements. Before entering detailed function explanation. Please refer to following definitions.

AC to DC (Energy absorbing and charging/ power supplying):

The BIC-2200 converts AC energy from the grid into DC energy for the battery or the loads. The operation principle is the same as an ordinary power supply or a charger.



DC to AC (Energy recycling and discharging):


Opposite to the AC to DC conversion, the BIC-2200 converts DC energy from the battery or loads into AC energy, then feeding back to the grid. AC output synchronization range is 180Vac~264Vac/47Hz~63Hz, the bidirectional power supply can work normally as long as the AC grid is within the range.



Bi-direction auto-detect mode:

This is default factory setting, BIC-2200 operates as table below

Condition	Mode
Set voltage > load voltage	AC to DC
Set voltage < load voltage	DC to AC

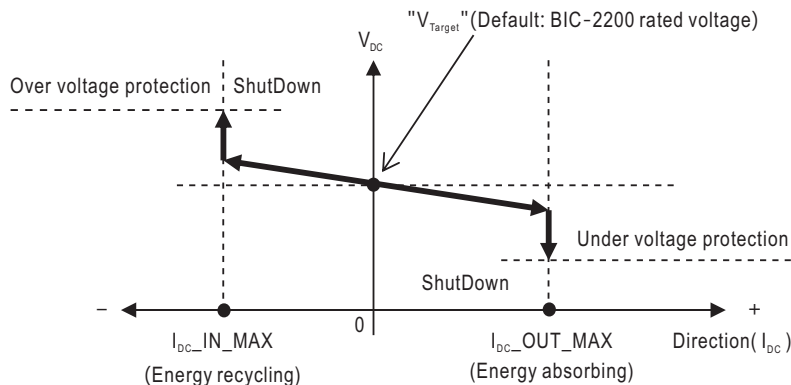

Operating characteristic curve

Note:Detail of set voltage, please refer to user's manual.

Bi-direction battery mode:

This mode only can be activated by CANBus model. Set the BIC-2200 in AC to DC (charging) or DC to AC (discharging) conversion directly through command DIRECTION_CTRL below.

Command	Conversion
DIRECTION_CTRL = 00h	AC to DC (charging)
DIRECTION_CTRL = 01h	DC to AC (discharging)



◎ Current Sharing

BIC-2200 has the built-in active current sharing function and can be connected in parallel, up to 5 units, to provide higher output power as exhibited below :

- ※ The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- ※ In parallel connection, power supply with the highest output Voltage will be the master unit and its Vout will be the DC bus voltage.
- ※ The total output current must not exceed the value determined by the following equation:
Maximum output current at parallel operation=(Rated current per unit)×(Number of unit)×0.95
- ※ When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit)×(Number of unit) the current shared among units may not be balanced.
- ※ Under parallel operation ripple of the output voltage may be higher than the SPEC at light load condition. It will go back to normal ripple level once the output load is more than 5%.
- ※ CN47/SW50 Function pin connection

Parallel	PSU1		PSU2		PSU3		PSU4		PSU5	
	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50	CN47	SW50
1 unit	X	ON	—	—	—	—	—	—	—	—
2 unit	V	ON	V	ON	—	—	—	—	—	—
3 unit	V	ON	V	OFF	V	ON	—	—	—	—
4 unit	V	ON	V	OFF	V	OFF	V	ON	—	—
5 unit	V	ON	V	OFF	V	OFF	V	OFF	V	ON

(V : CN47 connected ; X : CN47 not connected)

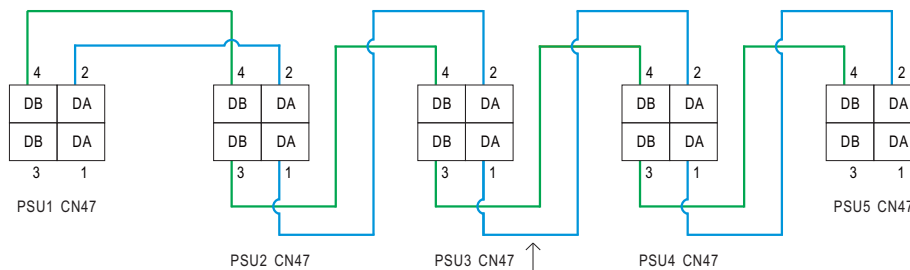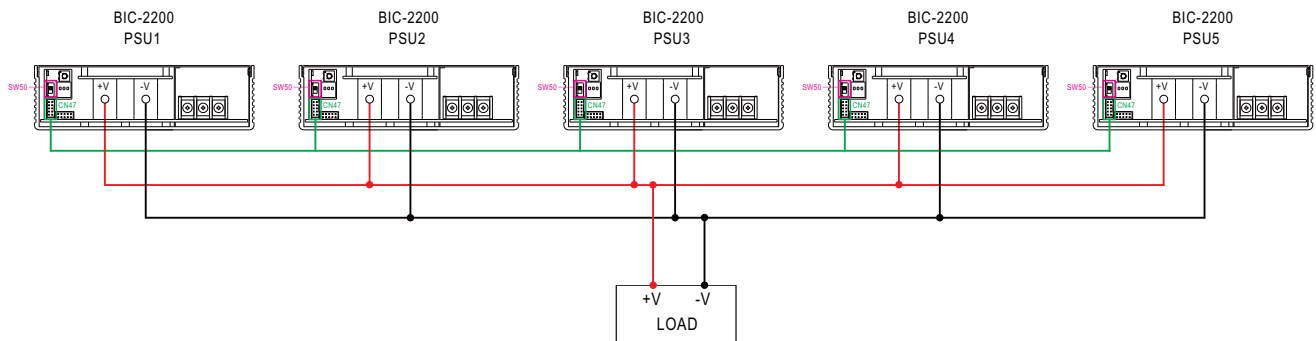

If the lines of CN47 are too long, they should be twisted in pairs to avoid the noise.

◎ DA,DB connected mutually in parallel.