


SRP-2305-30-24V

30W DALI2 DT6 / AC-PUSH

LED TREIBER

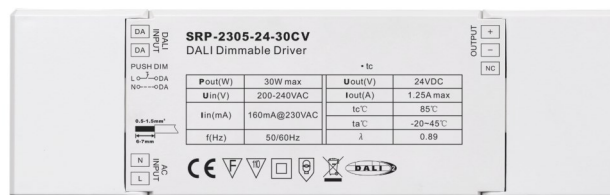

Eigenschaften / Features

Dimmbarer LED-Treiber mit DALI2 DT6 / Push Dimm-schnittstellen

In Übereinstimmung mit IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2.

Eingebaute DALI2 Schnittstelle, DALI DT6 Gerät

1 Kanal 24V Konstantspannung, max. Ausgangsleistung 30W

Ermöglicht die Steuerung einer einfarbigen LED-Beleuchtung

Klasse 2 Stromversorgung, voll isoliertes Kunststoffgehäuse

Hoher Leistungsfaktor und Wirkungsgrad

Kompatibel mit universellen DALI-Mastern, die DT6-Befehle unterstützen

Amplitudendimmung, kein PWM-Ausgang, flimmerfrei

Schutzart IP20

5 Jahre Garantie

Dimmable LED driver with DALI2 DT6 / Push dimming interfaces

In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2.

Built-in DALI2 interface, DALI DT6 device

1 channel 24V constant voltage output, max. output power 30W

Enables to control single color LED lighting

Class 2 power supply, full isolated plastic case

High power factor and efficiency

Compatible with universal DALI masters that support DT6 commands

Amplitude dimming, no PWM output, flicker free


Protection class IP20

5-year warranty

Technische Daten / Technical Data

INPUT	Voltage Range	200-240VAC
	Frequency	50/60Hz
	Power Factor (typ.)	> 0.9@230VAC
	Total harmonic distortion	THD ≤15% (@full load /230VAC)
	Input Current (typ.)	160mA@ 230VAC
	Inrush Current (typ)	COLD START Max. 2A @ 230VAC
	Efficiency (Typ.)	>86% @ 230VAC
OUTPUT	LED Channel	1
	DC Voltage	24VDC
	Max. Current	1.25A
	Rated Power	max. 30W
PROTECTION	Short Circuit	Yes, auto recovery after fault removed
	Over Temperature	Yes, recovers automatically after temperature drop
	Over Voltage	Yes, auto recovery after fault removed
CONTROL	Dimming Interface	DALI/Push
	Dimming Range	0.1% - 100%
	Dimming Methode	PWM 1.5kHz
	Dimming Curve	Logarithmic
ENVIRONMENT	Working Temperature	-20°C - + 45°C
	Max. Case Temperature	85°C (Ta = 45°C)
	Working Humidity	10%-95% RH non-condensing
	Storage Temperature	-40°C - +80°C
	Storage Humidity	10% - 95% RH
	IP Rating	IP20
Safety & EMC	Safety Standards	EN61347-1, EN61347-2-13 approved
	DALI Standards	IEC 62386-101 :2014, IEC 62386-102:2014, IEC 62386-207 Ed2
	Withstand Voltage	I/P-O/P: 3.75KVAC
	EMC Emission	EN55015, EN61000-3-2, EN61000-3-3
	EMC Immunity	EN61547, EN61000-4-2,3,4,5,6,8,11, surge immunity Line-Line 1KV
Others	MTBF	190.3K hrs min. @ 230VAC full load and 25°C ambient temperature
	Dimension	170*53*28mm (L*W*H)
	Warranty	5 years


Abmessungen / Dimension

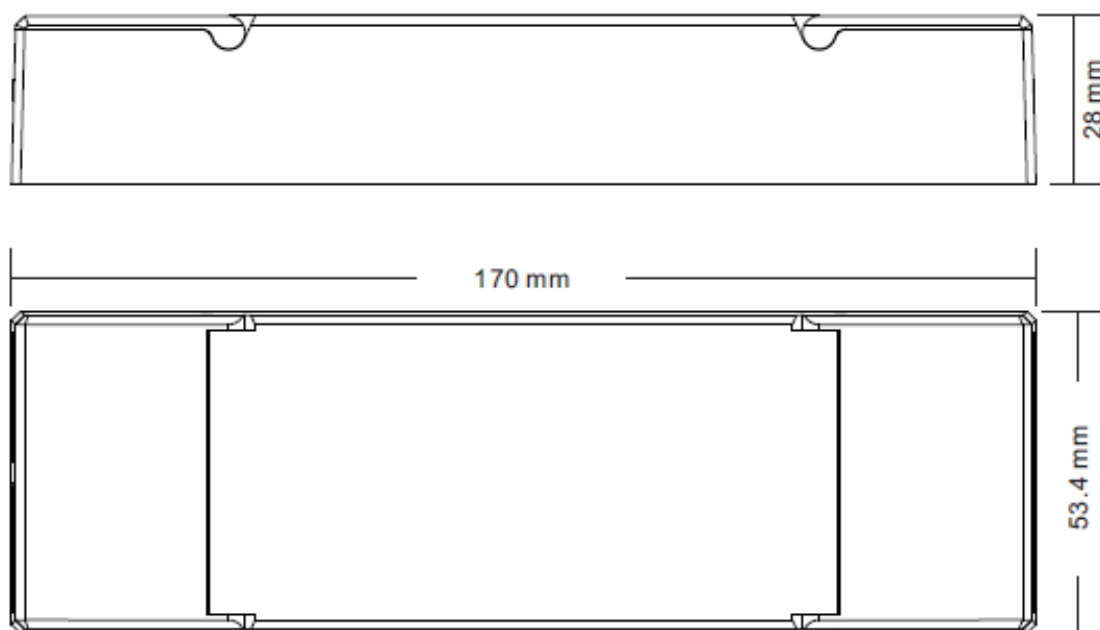

Anschlusschema / Wiring Diagram



Anschlusschema DALI, PUSH / Wiring Diagram DALI, PUSH

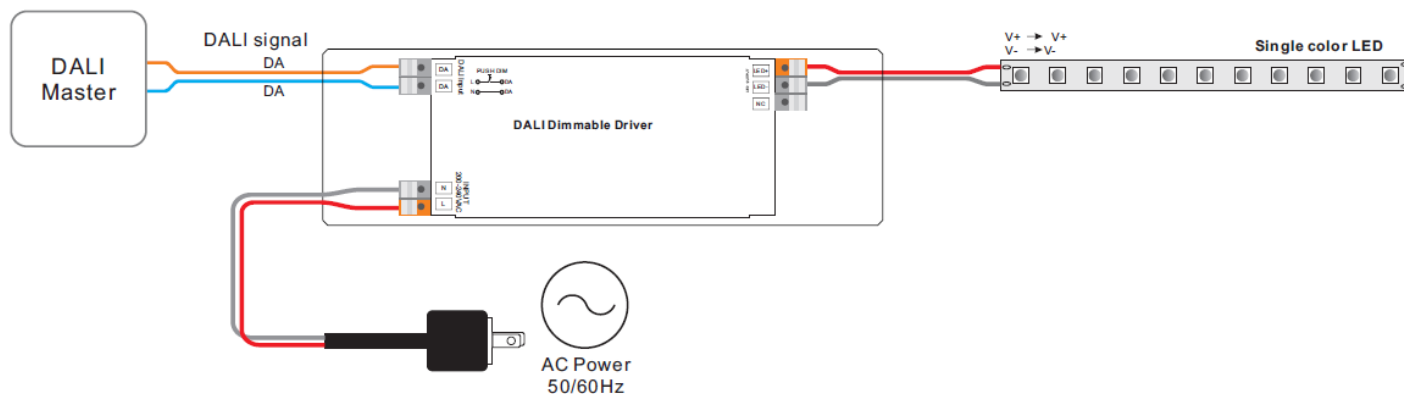


Anmerkung:

Die DALI-Adressen für den 1-Kanal-Ausgang werden von der DALI-Master-Steuerung automatisch zugewiesen, bitte lesen Sie die Bedienungsanleitungen der kompatiblen DALI-Master für spezifische Vorgänge.

Note:

DALI addresses for 1 channel output is assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

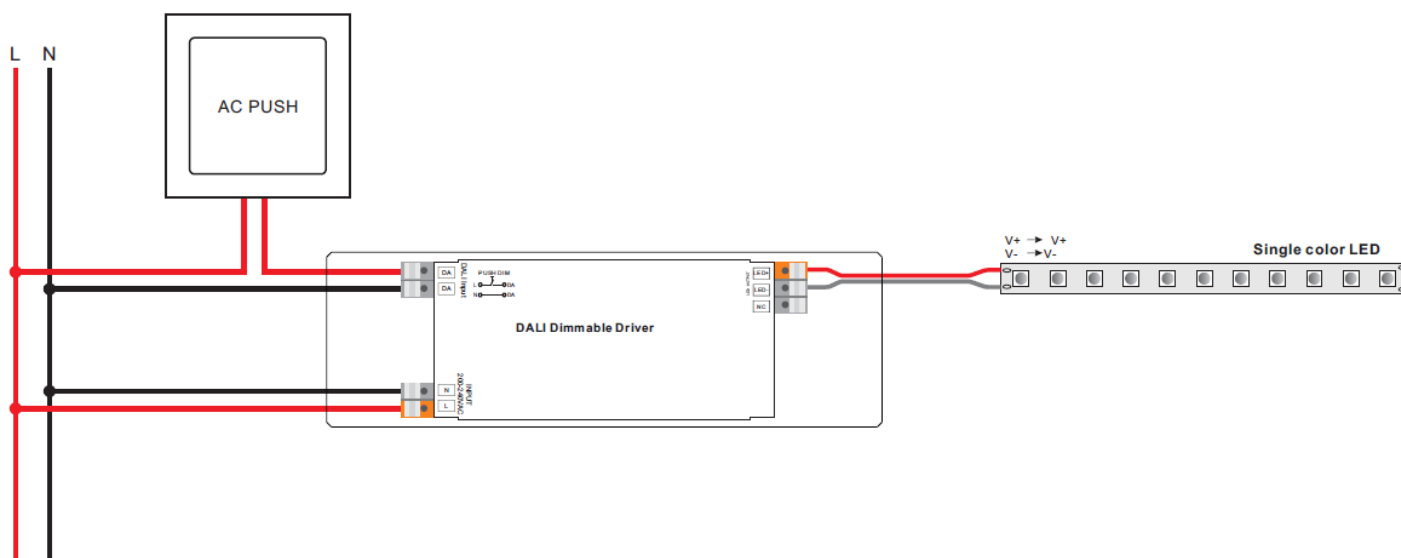

Installation

Sicherheit

Installieren Sie das Gerät nicht, während es am Stromnetz angeschlossen ist.

Stellen Sie den Betriebsstrom nicht bei Spannung am Gerät ein.

Setzen Sie das Gerät keiner Feuchtigkeit (inkl. Spritz- oder Tropfwasser) aus.

Treiber mit PWM Dimmung können durch Schwingungen Geräusche verursachen. Diese können sowohl durch schwingende Bauteile im Gerät, wie auch über Resonanzschwingungen von anderen Körpern erzeugt werden.

DALI Adresse zuteilen über einen Master

Die DALI Adresse kann über einen DALI-Master automatisch programmiert werden. Bitte beachten Sie dafür die Bedienungsanleitung des jeweiligen DALI-Masters.

Push Dimmer Modus

Wenn der Treiber mit einem AC PUSH verbunden ist, befindet er sich im Push Dimmer Modus.

Der Betrieb im Push Dimmer Modus funktioniert folgendermaßen:

Klicken Sie auf die Schaltfläche (Taster), um ein- und auszuschalten.

Halten Sie die Taste gedrückt, um die Lichtintensität auf den gewünschten Wert zu erhöhen oder zu verringern.

Die Speicherfunktion beim Ausschalten oder bei einem Stromausfall ermöglicht es dem Gerät, den Status vor dem Ausschalten zu speichern.

Safety

Do not install the unit while it is connected to the mains.

Do not adjust the operating current when the unit is live.

Do not expose the unit to moisture (including splashing or dripping water).

Drivers with PWM dimming can cause noise due to vibrations. These can be generated by vibrating components in the unit as well as by resonance vibrations from other bodies.

Assigning a DALI address via a master

The DALI address can be programmed automatically via a DALI master. Please refer to the operating instructions of the respective DALI master.

Push Dimmer Mode

When the driver is connected to an AC PUSH, it is in Push Dimmer mode.

Operation in Push Dimmer mode works as follows:

Click the button (push button) to switch on and off.

Press and hold the button to increase or decrease the light intensity to the desired value.

The memory function when switching off or in the event of a power failure allows the unit to save the status before switching off.