Simpex Electronic AG Binzackerstrasse 33 CH-8620 Wetzikon Telefon +41 44 931 10 30

www.simpex.ch contact@simpex.ch CHE-108.018.777 MWST









Casing material: plastic

Protection degree: IP65, IEC 529/ EN 60529

Electrical connection: one cable inlet for PG13.5 cable gland

Operating temperature: -25°C to +70°C Storage temperature: -30°C to +80°C IEC 947-5-1 Applicable standards: EN 60947-5-1


Appliance class:

Mounting positions: all position are authorised Fixing method: by No 2 M4 screws

Operation head: adjustable lever with Ø18 nylon roller

Contact: 1NO+1NC Snap action

Approvals: CE; cULus

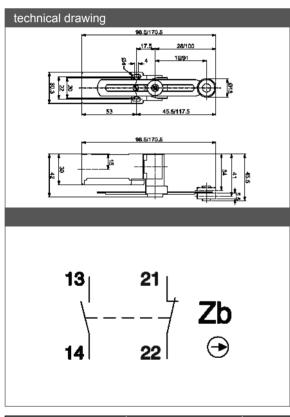

Model	Rated Voltage Range	Rated Current Range	Rated Voltage Range	Rated Current Range	Mechanical durability
	Va.c. 50/60 Hz	A (a.c.)	Vd.c.	A (d.c.)	Millions of operations
FC-004	24 - 400	10 - 4	24 - 250	6 - 0.4	10

All specifications, data and drawing are subject to change without notice and are approximate Please refer to our terms of sales including our warranty and limited liabilities clauses.

Rev. 03/01/2018 www.Fandis.it