



## 90W Constant Voltage + Constant Current LED Driver

LPF-90 series









#### Features

- · Constant Voltage + Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- Fully encapsulated with IP67 level
- Typical lifetime>50000 hours
- 5 years warranty

# Applications

- · LED panel lighting
- · LED downlight
- LED decorative lighting
- LED tunnel lighting
- · Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


#### **■** GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# ■ Description

LPF-90 series is a 90W AC/DC LED driver featuring the dual modes constant voltage and constant current output. LPF-90 operates from  $90\sim305$ VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the hign efficiency up to 91%, with the fanless design, the entire series is able to operate for -40  $^{\circ}$ C  $^{\circ}$ C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations.

# ■ Model Encoding

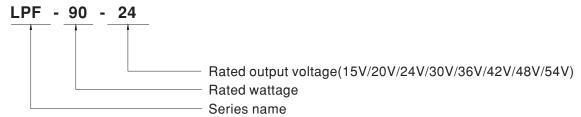




# **SPECIFICATION**

MODEL		LPF-90-15	LPF-90-20	LPF-90-24	LPF-90-30	LPF-90-36	LPF-90-42	LPF-90-48	LPF-90-54
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V
ОИТРИТ	CONSTANT CURRENT REGION Note.2	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	5A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A
	RATED POWER Note.5	75W	90W	90W	90W	90W	90.3W	90.24W	90.18W
	RIPPLE & NOISE (max.) Note.3	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	VOLTAGE TOLERANCE Note.4		±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
				1		20.070	20.070	20.070	20.070
	SETUP, RISE TIME Note.6	1200ms, 200ms / 115VAC 500ms, 200ms / 230VAC 16ms/230VAC 16ms/115VAC							
	HOLD UP TIME (Typ.)								
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)							
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR	$ PF {\ge 0.97/115VAC, PF \ge 0.96/230VAC, PF \ge 0.92/277VAC@full load } \\ (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) $							
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)							
INPUT	EFFICIENCY (Typ.)	89%	90%	90.5%	91%	91%	91%	91%	91%
	AC CURRENT	0.95A / 115VA	0.5A / 23		./ 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=435µs measured at 50% Ipeak) at 230VAC; Per NEMA 410							
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC							
	LEAKAGE CURRENT	<0.75mA / 240VAC							
PROTECTION	ELAKAGE GOKKENT	<0.75mA / 240VAC							
	OVER CURRENT	95 ~ 108%							
			nt limiting, recove				1 47 5014	1	50 051/
	OVER VOLTAGE	18 ~ 21V   23 ~ 27V   28 ~ 34V   34 ~ 38V   41 ~ 46V   47 ~ 53V   54 ~ 60V   59 ~ 65V							
		Shut down o/p voltage, re-power on to recover							
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover							
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)							
	MAX. CASE TEMP.	Tcase=+70°C							
	WORKING HUMIDITY	20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)							
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No.250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384, J61347-1, J61347-2-13, EAC TP TC 004, GB19510.1, GB19510.14, IP67 approved; Design refer to UL60950-1							
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC							
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH							
	EMC EMISSION Note.8	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load ≥ 60%) ; BS EN/EN61000-3-3, GB17743 and GB17625.1,EAC TP TC 020							
	EMC IMMUNITY								
	MTBF	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV), EAC TP TC 02							
OTHERS		3292.9K hrs min. Telcordia SR-332 (Bellcore); 301.7Khrs min. MIL-HDBK-217F (25℃)  161*61*36mm (L*W*H)							
	DIMENSION		,						
	PACKING  1. All parameters NOT special	0.7Kg;20pcs/1				. ==0:: 4			
NOTE	2. Please refer to "DRIVING M 3. Ripple & noise are measured 4. Tolerance: includes set up to 5. De-rating may be needed up 6. Length of set up time is mea 7. The driver is considered as complete installation, the fina 8. To fulfill requirements of the without permanently connection.	at 20MHz of ba blerance, line reg nder low input von asured at first con a component that al equipment man be latest ErP re ted to the main	ndwidth by using julation and load oltages. Please old start. Turning at will be operate anufacturers mulagulation for lights.	regulation. refer to "STATI g ON/OFF the of the din combinati st re-qualify EN thing fixtures,	C CHARACTER river may lead to on with final equal on the contractive on this LED drive	RISTIC" sections to increase of the uipment. Since E the complete ins r can only be u	for details. e set up time. EMC performanc tallation again.	e will be affected	•




### ■ BLOCK DIAGRAM

fosc: 100KHz

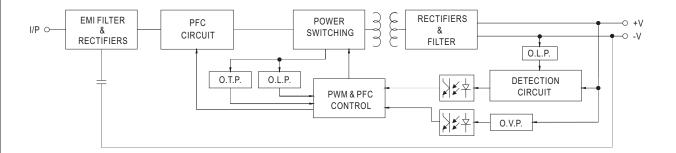

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

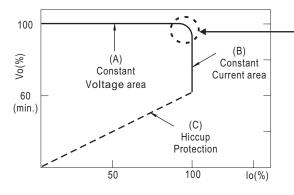


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.



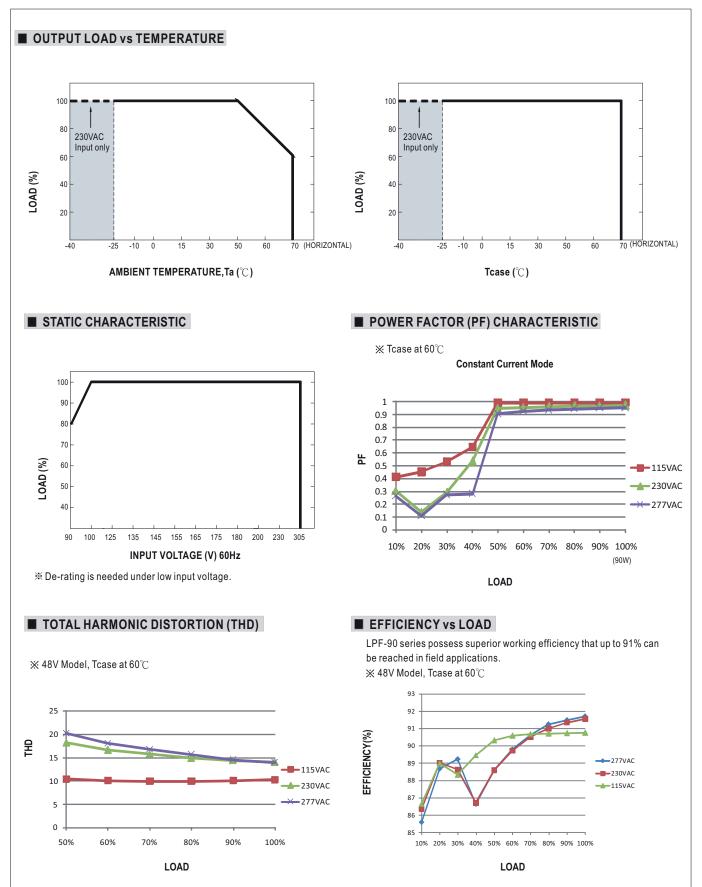




# ■ LIFE TIME

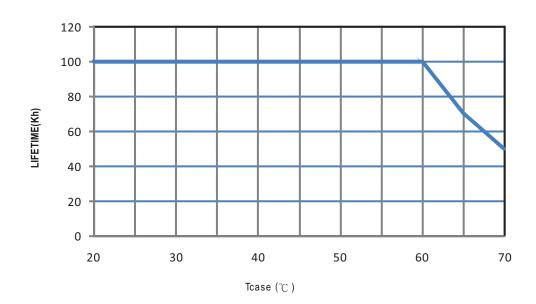



### ■ MECHANICAL SPECIFICATION

CASE NO.: LPF-90A Unit:mm

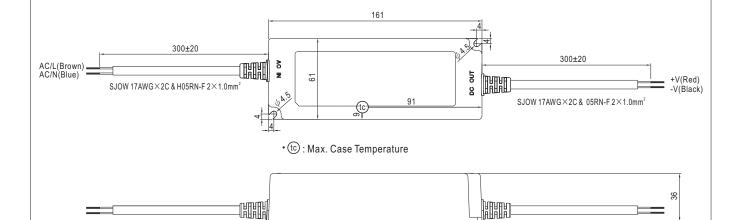

# ■ Recommend Mounting Direction



#### **■ INSTALLATION MANUAL**

Please refer to:http://www.meanwell.com/manual.html