



TEST REPORT: HDR-30-15

30W Ultra Slim Step Shape DIN Rail

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

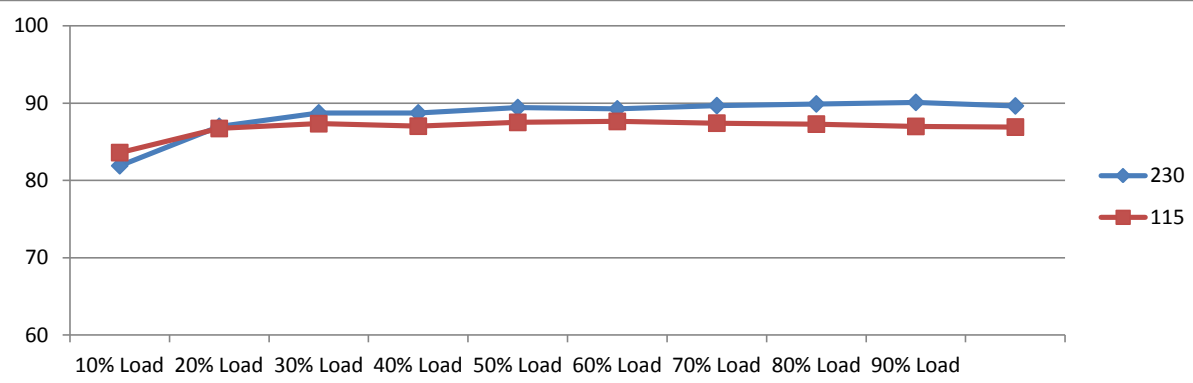
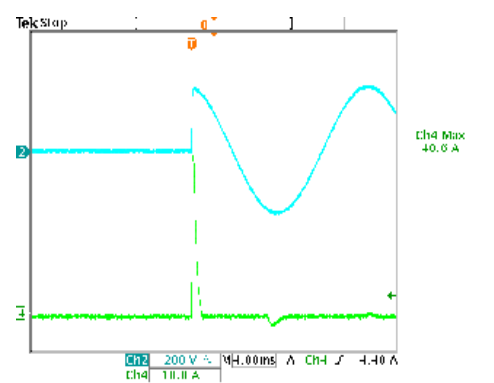
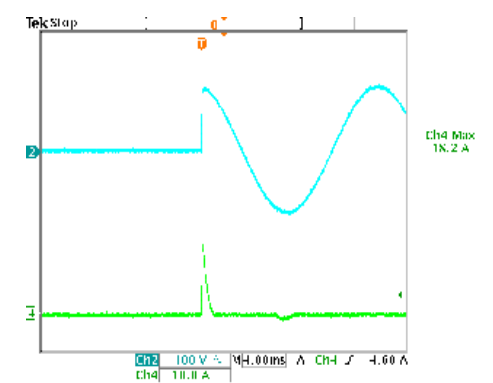
ENVIRONMENT TEST

DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 13.50V ~ 18.00V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 13.18V ~ 18.41V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 1.0% ~ -1.0%	I/P : 85VAC / 277VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.53% ~ 0.00%
3	LINE REGULATION (MAX.)	V1 : 1.0% ~ -1.0%	I/P : 85VAC / 277VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.07%
4	LOAD REGULATION(MAX.)	V1 : 1.0% ~ -1.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.27% ~ -0.27%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 2.0 %
6	RIPPLE & NOISE(Max)	V1 : 120 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 51.4 mVp-p
			high frequency:	low frequency:
7	SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 108ms 115VAC : 54ms
7	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	Telc Stop	Telc Stop

8	RISE TIME (MAX.)	230VAC : 50ms 115VAC : 50ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 9.2ms 115VAC : 9.8ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage			
9	HOLD UP TIME (TYP.)	230VAC : 30ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 101.6ms 115VAC : 22.4ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			
10	DYNAMIC LOAD	V1 : 1500 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25°C	V1: (1). 402mv (2). 307mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ FULL /MIN LOAD 50%DUTY / 1KHZ			

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 277VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	67.0VAC ~ 277VAC
			I/P : LOW-LINE = 82VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 85VAC ~ 277VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.48A / 230VAC 0.88A / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.26A / 230VAC I= 0.51A / 115VAC
4	NO LOAD POWER CONSUMPTION	< 0.30W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.1097 W
5	EFFICIENCY (TYP.)	89.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	89.64 %
				
6	INRUSH CURRENT (TYP.)	45A / 230VAC 25A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 40.6A / 230VAC I= 18.2A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/50HZ @ FULL LOAD
		CH2 : AC Input Voltage CH4 : Input current (1V=1A)		CH2 : AC Input Voltage CH4 : Input current (1V=1A)
				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 160%	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: TESTING TA: 25°C	129.00% 277VAC 129.00% 230VAC 129.00% 85VAC Hiccup mode when output voltage<50%, recovers automatically after fault condition is removed; Constant current limiting within 50%~100% rated output voltage, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	18.80V ~ 22.50V	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA: 25°C	21.30V 277VAC 21.30V 230VAC 21.30V 85VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 277VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 4.5A	I/P : 280VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 280VAC VDS: (1). 508.00V (2). 478.00V (3). 502.00V
2	O/P Diode	D100 Rated : 120V 20.0A	I/P : 280VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	D100 VDS : (1). 82.40V (2). 72.80V (3). 78.80V
3	Input Capacitor	C5 Rated : 68uf 400V	I/P : 280VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 388.00V (2). 388.00V (3). 388.00V
4	Control IC	U101 Rated : 38V (max) 0V (min) U1 Rated : 35V (max) 0V (min)	I/P : 280VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U101 U1 (1). 23.00V 23.00V (2). 11.80V 0.72V (3). 11.80V 3.70V (4). 30.10V 21.30V (5). 17.60V 12.90V
6	Clamp Diode	D5 Rated : 1000V 1.0A	I/P : 280VAC O/P : (1)Dynamic Load Full/Min Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1). 488.00V (2). 492.00V

SAFETY & E.M.C. TEST
SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta : 25°C	I/P-O/P: 1.52mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT				
1	TEMPERATURE RISE TEST	MODEL : HDR-30-5						
		1. ROOM AMBIENT BURN-IN : 1.0hrs						
		IP: 230VAC O/P: 100% LOAD TA= 24.7℃						
		2. HIGH AMBIENT BURN-IN : 1.0hrs						
		IP: 230VAC O/P: 100% LOAD TA= 49.6℃						
		NO.	Positio	ROOM AMBIENT 24.7℃	HIGH AMBIENT Ta: 49.6℃			
		1	ZNR1	30.3℃	54.9℃			
		2	LF2	36.0℃	60.7℃			
		3	Q1	55.4℃	81.1℃			
		4	T1 PRI	54.4℃	76.2℃			
		5	C40	47.3℃	71.2℃			
		6	T1 SEC	61.0℃	84.5℃			
		7	C105	59.7℃	83.8℃			
		8	D100	81.9℃	106.2℃			
		9	LF101	50.7℃	74.9℃			
		10	U1	49.3℃	73.5℃			
		2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230VAC	TEST : OK		
1 HOUR (MIN)	O/P : 123.00% LOAD							
	Ta : 25℃							
3	LOW TEMPERATURE TURN ON TEST			NO DAMAGE	I/P : 277VAC / 100VAC	TEST : OK		
				1 HOUR (MIN)	O/P : FULL LOAD			
					Ta : -30.0℃			
				4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS	I/P : 287VAC	TEST : OK
						IN CHAMBER ON	O/P : FULL LOAD	
						CONTROL 50℃	Ta : 50℃	
		NO DAMAGE	HUMIDITY= 95.0% RH					
		5	TEMPERATURE COEFFICIENT	±0.03% /(0℃~50℃)	I/P : 230VAC	±0.0083% /(0℃~50℃)		
					O/P : FULL LOAD			
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40℃ ~ +85℃		TEST : OK				
		2. Temperature change rate : 25℃ / MIN						
		3. Dwell time low and high temperature : 30 MIN/EACH						
		4. Total test cycle : 5 CYCLE						
		5. Input/Output condition : STATIC						

7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35℃ ~ +55℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec	TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25℃	TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0℃ LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50.0℃ LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50.0℃ LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50.0℃ LIFE TIME	(1). 158118 HRS (2). 56064 HRS (3). 125618 HRS (4). 158118 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 968.1K hrs min. MIL-HDBK-217F (25℃)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 50℃	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A5