



TEST REPORT: IRM-03-15

3W Single Output Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

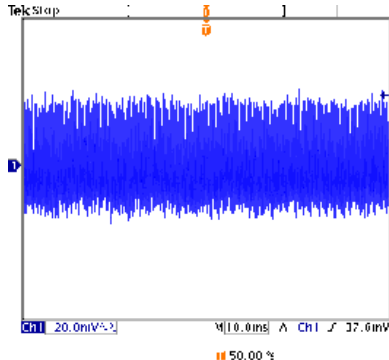
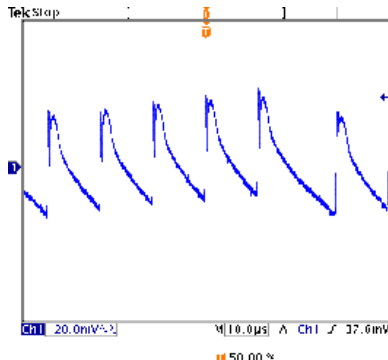
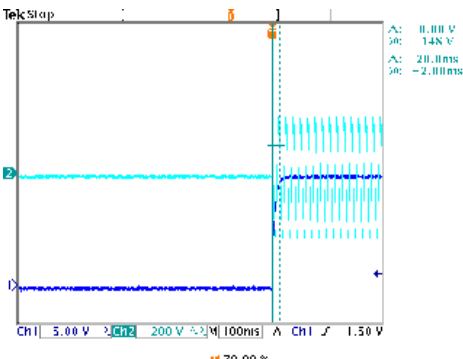
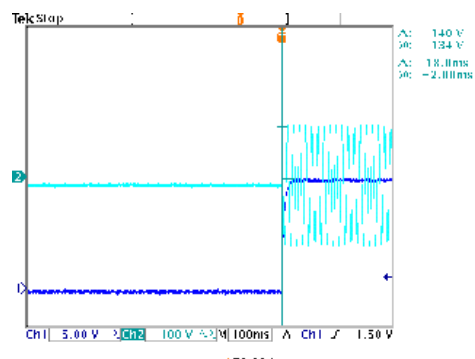
Safety Test

E.M.C. Test

■ RELIABILITY TEST

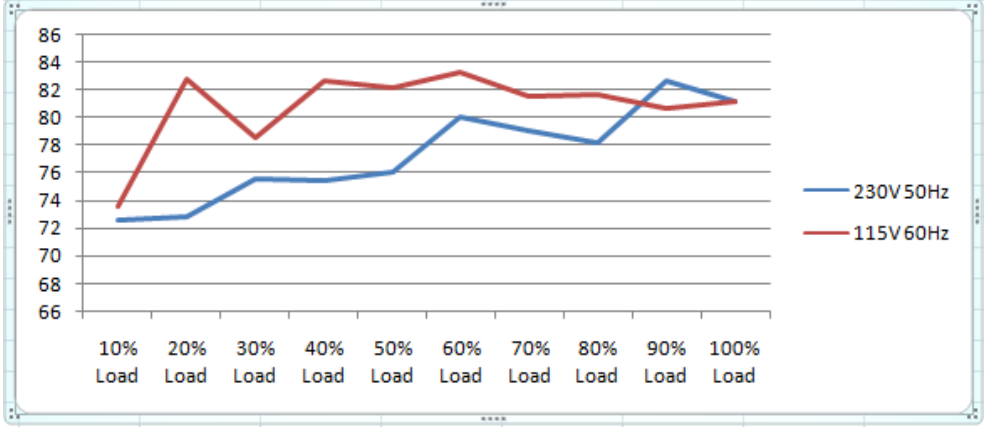
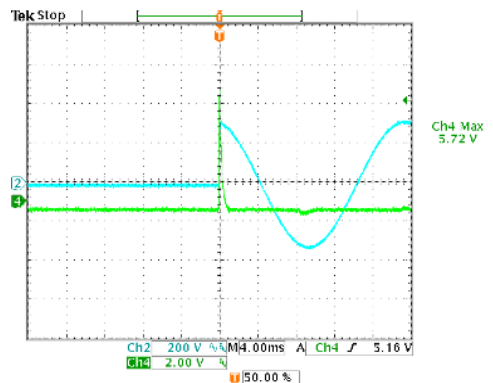
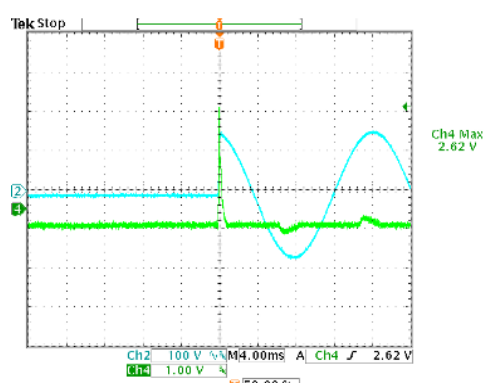
ENVIRONMENT TEST

DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 0.00V ~ 0.00V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 14.93V ~ 14.93V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 1.0% ~ -1.0%	I/P : 100VAC / 305VAC O/P: FULL / MINLOAD TA= 25°C	V1: -0.47% ~ -0.53%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 100VAC / 305VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.07%
4	LOAD REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.00% ~ -0.07%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 2.013 %
6	RIPPLE & NOISE(Max)	V1 : 200 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 72.8 mVp-p
		high frequency :		low frequency :
				
7	SET UP TIME (MAX.)	230VAC : 600ms 115VAC : 600ms	I/P : 230VAC I/P : 115VAC	230VAC : 20ms 115VAC : 18ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
				
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 14.8ms 115VAC : 14.0ms

8	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
9	HOLD UP TIME (TYP.) 230VAC : 40ms 115VAC : 8ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 73.6ms 115VAC : 16.8ms	
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
10				
	DYNAMIC LOAD V1 : 1500 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25°C	(1). 180.0mv (2). 186.0mv	unit:mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 305VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	56.0VAC ~ 305VAC
			I/P : LOW-LINE = 77VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 100VAC ~ 305VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.04 / 230VAC 0.07 / 115VAC	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 0.03A / 230VAC I= 0.05A / 115VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P : 277VAC O/P: MIN LOAD TA : 25°C	L-FG: 0.0721 mA N-FG: 0.0722 mA
5	NO LOAD POWER CONSUMPTION	< 0.08W	I/P : 230VAC O/P: MIN LOAD TA : 25°C	< 0.038 W
6	EFFICIENCY (TYP.)	78.0%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	81.2 %
				
7	INRUSH CURRENT (TYP.)	20A / 230VAC 10A / 115VAC twidh= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 5.72A / 230VAC I= 2.62A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage  INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage 		

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105% ~ 260%	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	223% 305VAC 223% 230VAC 205% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	15.75V ~ 20.30V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	17.50V 305VAC 17.50V 230VAC 17.50V 85VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 725V 0.4A	I/P : 308VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 308VAC VDS: (1). 642.00V (2). 532.00V (3). 642.00V
2	Input Capacitor	C5 Rated : 3uf 450V	I/P : 308VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 432.00V (2). 432.00V (3). 432.00V
3	Control IC	U1 Rated : 9.0V (max) -0.3V (min)	I/P : 308VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	(1). 6.56V (2). 6.12V (3). 6.12V (4). 6.56V
4	O/P Diode	D100 Rated : 80V 2.0A	I/P : 308VAC O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1). 72.40V (2). 53.60V (3). 71.20V
5	Clamp Diode	D1 Rated : 1000V 1.0A	I/P : 308VAC O/P : (1)Full load continue Ta : 25°C	(1). 614.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.000KVAC /min	I/P-O/P: 3.300KVAC /min Ta : 25°C	I/P-O/P: 0.38mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS

2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL : IRM-03-12			
		1. ROOM AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 21.9℃			
		2. HIGH AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 68.2℃			
		NO.	Position	ROOM AMBIENT 21.9℃	HIGH AMBIENT Ta: 68.2℃
		1	C6	37.8℃	83.6℃
		2	R5	35.8℃	81.8℃
		3	R2	37.0℃	82.9℃
		4	T1	38.9℃	84.4℃
		5	C101	35.2℃	80.6℃
		6	D100	38.2℃	83.9℃
2	OVER LOAD BURN-IN TEST	NO DAMAGE		TEST : OK	
		1 HOUR (MIN)			
		I/P : 230VAC			
		O/P : 136% LOAD			
		Ta : 25℃			
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE		TEST : OK	
		1 HOUR (MIN)			
		I/P : 305VAC / 100VAC			
		O/P : FULL LOAD			
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	NO DAMAGE		TEST : OK	
		AFTER 12 HOURS			
		IN CHAMBER ON			
		CONTROL 70℃			
5	TEMPERATURE COEFFICIENT	±0.03% /(0℃~50℃)		±0.0036% /(0℃~50℃)	
		I/P : 230VAC			
6	STORAGE TEMPERATURE TEST	O/P : FULL LOAD		TEST : OK	
		Ta : 70℃			
7	THERMAL SHOCK TEST	HUMIDITY= 95.0% RH		TEST : OK	
8	VIBRATION TEST	1 Carton & 1 Set		TEST : OK	
		(1) Waveform : Sine Wave			
9		(2) Frequency : 10~500Hz			
		(4) Acceleration : 5G			
10		(5) Test Time : 60 min in each axis (X.Y.Z)			
		(6) Ta : 25℃			



3W Single Output Encapsulated Type

IRM-03
series

9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT					
		(1) I/P :	230VAC	O/P :	FULL LOAD	Ta= 25.0℃	LIFE TIME
		(2) I/P :	230VAC	O/P :	FULL LOAD	Ta= 70.0℃	LIFE TIME
		(3) I/P :	230VAC	O/P :	75% LOAD	Ta= 70.0℃	LIFE TIME
		(4) I/P :	230VAC	O/P :	50% LOAD	Ta= 70.0℃	LIFE TIME
10	MTBF	MIL-HDBK-217F					
		TOTAL FAILURE RATE : 2137.6 KHR					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 70℃					

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014