



Test Report: IRM-90-48

90W AC-DC PCB-Mount Green Power Moudle

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

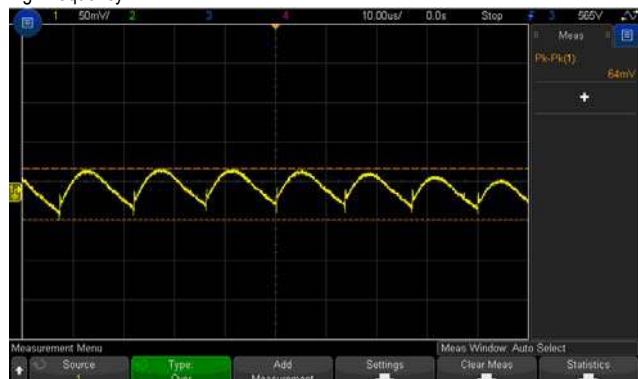
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -2.0%~ +2.0 %	I/P: 80VAC /305VAC O/P:FULL/ MIN. LOAD Ta:25℃	V1: -0.065 %~ 0.134 %
2	LINE REGULATION (Max)	V1: -0.5%~ +0.5 %	I/P: 80VAC~ 305VAC O/P:FULL LOAD Ta:25℃	V1: -0.029 %~ 0.134%
3	LOAD REGULATION(Max)	V1: -0.5%~ +0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: -0.065 %~0.09 %
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25℃	1.3%
5	PEAK LOAD TEST	≥ 10 Sec.	I/P: 230VAC O/P:PEAK LOAD Ta:25℃	OK
6	RIPPLE & NOISE(Max)	V1: 240mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25℃	V1: 113mVp-p



high frequency :





low frequency :

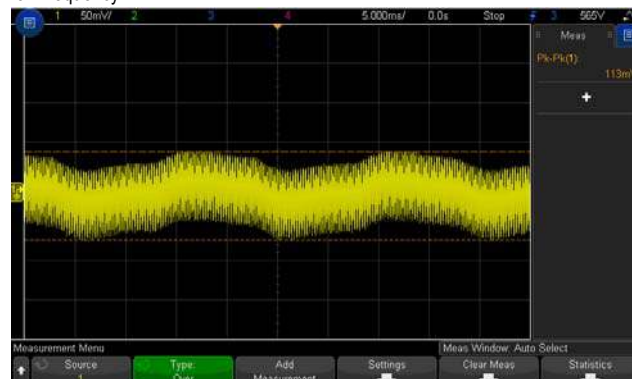

7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25℃	230VAC/ 222 ms 115VAC/ 225 ms
---	------------------	--------------------------------	---	----------------------------------

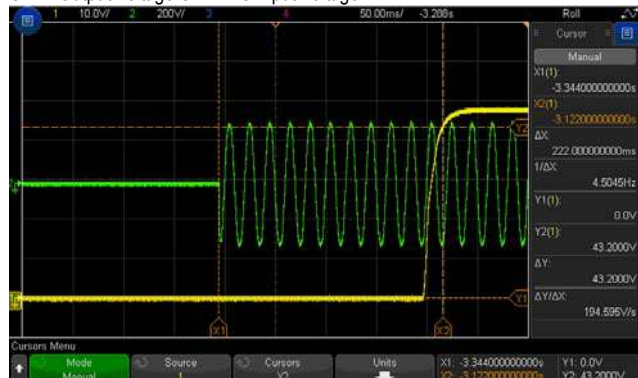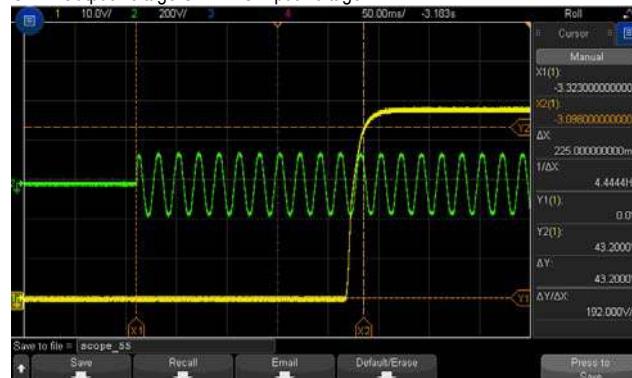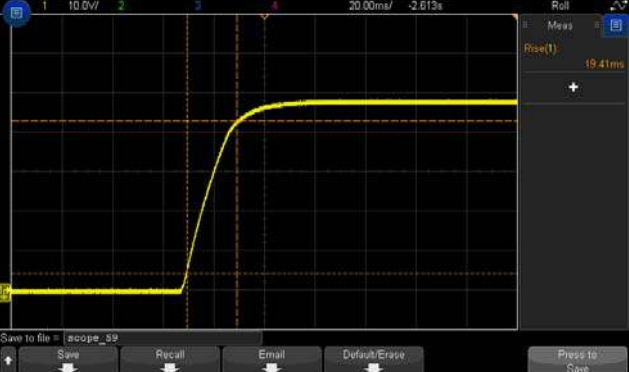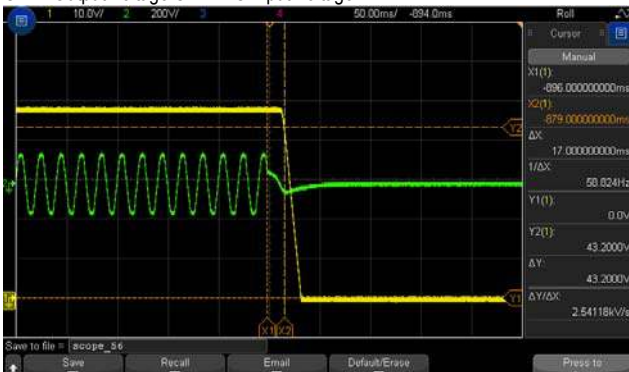
INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage


8	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 19.41 ms 115VAC/ 17.72 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage				
9	HOLD UP TIME (Typ.)	230VAC/30ms 115VAC/10ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 71 ms 115VAC/ 17 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage				
10	DYNAMIC LOAD	V1: 4800 mVp-p	I/P: 230VAC O/P: (1)FULL /HALF LOAD 50%DUTY / 120HZ (2)FULL /HALF LOAD 50%DUTY / 1KHZ Ta:25°C	235mVp-p 253mVp-p
FULL /50% LOAD 50%DUTY / 120HZ				
FULL /50% LOAD 50%DUTY / 1KHZ				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~305VAC 113VDC~431VDC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	69 VAC~305VAC 99VDC~431VDC
			I/P: LOW-LINE-3V=77 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 80 VAC ~305 VAC O/P: FULL~MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.1A 115V/ 1.9 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=0.6816A/ 230VAC I=1.2706A/ 115VAC
4	LEAKAGE CURRENT	< 0.25mA / 240VAC	I/P : 240VAC O/P : Min LOAD Ta : 25°C	Touch current : 0.102mA
5	NO LOAD CONSUMPTION	<0.21 W	I/P : 115VAC/230VAC O/P : NO LOAD Ta : 25°C	0.13W/115VAC 0.18W/230VAC
7	EFFICIENCY(Typ.)	93%	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	93.48%

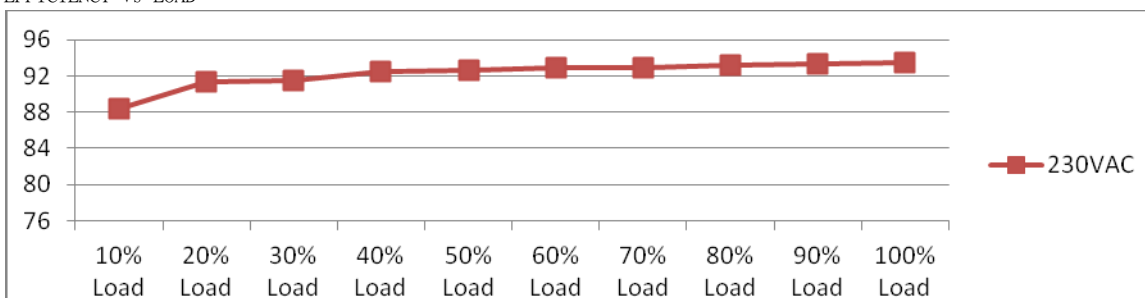
EFFICIENCY vs LOAD



8	INRUSH CURRENT(Typ.)	230V/65A 115V/30A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=52.6A/ 230VAC I=25A/ 115VAC
---	----------------------	------------------------------------	--	----------------------------------


INPUT=230VAC/50HZ @ FULL LOAD

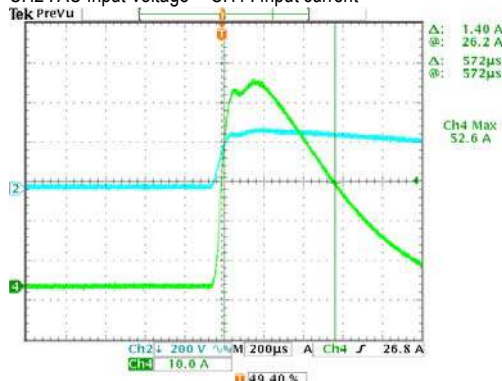CH2 : AC Input Voltage CH4 : Input current



INPUT=115VAC/ 60HZ @ FULL LOAD

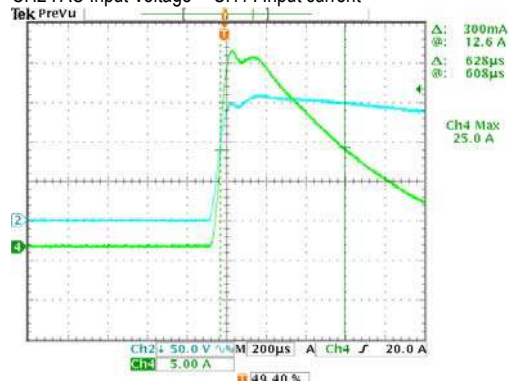CH2 : AC Input Voltage CH4 : Input current



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115%~ 160 %	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25℃	135.63%/ 305VAC 151.49%/ 230VAC 134.74%/100VAC PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed °
2	OVER VOLTAGE PROTECTION	50.4V~64.8V	I/P: 305VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD Ta:25℃	55.7V/ 305VAC 55.7V/ 230VAC 55.7V/ 80VAC PROTECTION TYPE : Shut down O/P voltage ,re-power on to recover.
3	OVER TEMPERATURE PROTECTION	Protection type : Shut down O/P voltage, re-power on to recover.	I/P: 305VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down O/P voltage ,re-power on to recover.
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 80VAC O/P: FULL LOAD Ta:25℃	NO DAMAGE PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed °

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 17 A/ 680V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. Ta:25℃	VDS: (1) 615V (2) 611V (3) 615V (4) 619V (5) 619V (6) 619V (7) 630V
4	Diode Peak Voltage	Q100 Rated: 20 A/ 300V	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. (8). NO LOAD Ta:25℃	Q101: VDS: (1) 238V (2) 238V (3) 240V (4) 240V (5) 240V (6) 240V (7) 242V (8) 242V

5	Input Capacitor Voltage	C5 Rated: 150 μ / 450 V	I/P:High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1) 441V (2) 429V (3) 429V (4) 421V
6	Control IC Voltage Test	PWM IC U2 Rated: -0.3 V~ 30 V	AC ON/OFF I/P:High-Line +3V =308 V O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD (LOW LINE) Ta:25°C	U2 (1)17.6V (2)17.6V (3)17.6V (4)19.6V (5)17.8V
9	Clamp Diode Peak Voltage	D1 Rated: 650 V/ 1 A	AC ON/OFF I/P : High-Line +3V = 308 V O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta:25°C	(1)466 V (2)426 V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min	I/P-O/P:4.4 KVAC/min Ta:25°C	I/P-O/P:1.852 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω	I/P-O/P: 600 VDC Ta:25°C	I/P-O/P:9999 M Ω NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	☒ CRITERIA A ☐ CRITERIA B
5	E.F.T	EN61000-4-4 INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	☒ CRITERIA A ☐ CRITERIA B
6	SURGE	IEC61000-4-5 L-N : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	☒ CRITERIA A ☐ CRITERIA B
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																
1	TEMPERATURE RISE TEST	MODEL : IRM-90-48 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 26.2 ℃ 2. HIGH AMBIENT BURN-IN : HRS I/P : 230VAC O/P : FULL LOAD Ta= 51.9 ℃ <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 26.2 ℃</th><th>HIGH AMBIENT Ta= 51.9 ℃</th></tr><tr><td>1</td><td>RTH1</td><td>68.2℃</td><td>88.6℃</td></tr><tr><td>2</td><td>LF1</td><td>64.2℃</td><td>85.7℃</td></tr><tr><td>3</td><td>LF2</td><td>63.5℃</td><td>86.5℃</td></tr><tr><td>4</td><td>C1</td><td>62.6℃</td><td>85.4℃</td></tr><tr><td>5</td><td>BD1</td><td>63.8℃</td><td>86.6℃</td></tr><tr><td>6</td><td>R22</td><td>65.1℃</td><td>88℃</td></tr><tr><td>7</td><td>C5</td><td>65.7℃</td><td>88.5℃</td></tr><tr><td>8</td><td>Q1</td><td>66.3℃</td><td>89.3℃</td></tr><tr><td>9</td><td>C11</td><td>64.7℃</td><td>87.7℃</td></tr><tr><td>10</td><td>RTH2</td><td>67.6℃</td><td>90.7℃</td></tr><tr><td>11</td><td>T1 coil</td><td>69.2℃</td><td>92.4℃</td></tr><tr><td>12</td><td>T1 core</td><td>68.6℃</td><td>91.6℃</td></tr><tr><td>13</td><td>Q100</td><td>78℃</td><td>100.4℃</td></tr><tr><td>14</td><td>C107</td><td>54.6℃</td><td>77℃</td></tr><tr><td>15</td><td>C106</td><td>61.9℃</td><td>84.3℃</td></tr><tr><td>16</td><td>C105</td><td>71.2℃</td><td>93.2℃</td></tr><tr><td>17</td><td>L100</td><td>56.9℃</td><td>79.3℃</td></tr><tr><td>18</td><td>D1</td><td>68.3℃</td><td>91.4℃</td></tr><tr><td>19</td><td>U2</td><td>65.1℃</td><td>87.9℃</td></tr><tr><td>20</td><td>BC1</td><td>67.7℃</td><td>90.7℃</td></tr><tr><td>21</td><td>U3</td><td>63.2℃</td><td>86.8℃</td></tr><tr><td>22</td><td>U4</td><td>61.7℃</td><td>85℃</td></tr><tr><td>23</td><td>PCB</td><td>71.9℃</td><td>94.4℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 26.2 ℃	HIGH AMBIENT Ta= 51.9 ℃	1	RTH1	68.2℃	88.6℃	2	LF1	64.2℃	85.7℃	3	LF2	63.5℃	86.5℃	4	C1	62.6℃	85.4℃	5	BD1	63.8℃	86.6℃	6	R22	65.1℃	88℃	7	C5	65.7℃	88.5℃	8	Q1	66.3℃	89.3℃	9	C11	64.7℃	87.7℃	10	RTH2	67.6℃	90.7℃	11	T1 coil	69.2℃	92.4℃	12	T1 core	68.6℃	91.6℃	13	Q100	78℃	100.4℃	14	C107	54.6℃	77℃	15	C106	61.9℃	84.3℃	16	C105	71.2℃	93.2℃	17	L100	56.9℃	79.3℃	18	D1	68.3℃	91.4℃	19	U2	65.1℃	87.9℃	20	BC1	67.7℃	90.7℃	21	U3	63.2℃	86.8℃	22	U4	61.7℃	85℃	23	PCB	71.9℃	94.4℃
NO	Position	ROOM AMBIENT Ta= 26.2 ℃	HIGH AMBIENT Ta= 51.9 ℃																																																																																																	
1	RTH1	68.2℃	88.6℃																																																																																																	
2	LF1	64.2℃	85.7℃																																																																																																	
3	LF2	63.5℃	86.5℃																																																																																																	
4	C1	62.6℃	85.4℃																																																																																																	
5	BD1	63.8℃	86.6℃																																																																																																	
6	R22	65.1℃	88℃																																																																																																	
7	C5	65.7℃	88.5℃																																																																																																	
8	Q1	66.3℃	89.3℃																																																																																																	
9	C11	64.7℃	87.7℃																																																																																																	
10	RTH2	67.6℃	90.7℃																																																																																																	
11	T1 coil	69.2℃	92.4℃																																																																																																	
12	T1 core	68.6℃	91.6℃																																																																																																	
13	Q100	78℃	100.4℃																																																																																																	
14	C107	54.6℃	77℃																																																																																																	
15	C106	61.9℃	84.3℃																																																																																																	
16	C105	71.2℃	93.2℃																																																																																																	
17	L100	56.9℃	79.3℃																																																																																																	
18	D1	68.3℃	91.4℃																																																																																																	
19	U2	65.1℃	87.9℃																																																																																																	
20	BC1	67.7℃	90.7℃																																																																																																	
21	U3	63.2℃	86.8℃																																																																																																	
22	U4	61.7℃	85℃																																																																																																	
23	PCB	71.9℃	94.4℃																																																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 148 % LOAD Ta : 25℃	TEST : OK																																																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 100 % LOAD Ta= -35 ℃	TEST : OK																																																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 55 ℃ /95 %R.H NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 55 ℃ HUMIDITY= 95 %R.H	TEST : OK																																																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃ (0~50℃)	I/P : 230 VAC O/P : FULL LOAD	± 0.0263 %/℃ (0~50℃)																																																																																																

6	STORAGE TEMPERATURE TEST	-40~85℃	1. Thermal shock Temperature : -45℃~+90℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-30~55℃	1. Thermal shock Temperature : -35℃~+60℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25℃
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 55 ℃ LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 55 ℃ LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 55 ℃ LIFE TIME	(1) 106346 HRS (2) 17169 HRS (3) 30222 HRS (4) 61057 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 310K hrs min. MIL-HDBK-217F (25℃); 1694.28 K hrs min.Telcordia TR/SR-332 (Bellcore) (25℃)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50℃ Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		Wangdz

2018.4.30 GP-A50-F010