



Test Report: XLG-150-M

150W Constant Power MODE LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

Environment Test




DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 100 VAC / 305 VAC O/P: FULL/ MIN LOAD Ta: 25°C	<±2.2%
2	CONSTANT CURRENT REGION	60V-107V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	32 V~ 108 V
3	OPEN CIRCUIT VOLTAGE (max.)	115V	I/P: 230 VAC O/P: NO LOAD	110.32V
4	CURRENT RIPPLE	3.0% max. @ full load	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	2.41%
5	CURRENT ADJ. RANGE	700 mA ~2100mA	I/P: 230 VAC O/P: TESTING Ta: 25°C	627 mA ~2281mA
6	CONSTANT POWER	O/P: 150W	I/P: 230 VAC O/P: Vo×Io	TEST: OK
7	SET UP TIME(Max)	1200ms/115VAC 500ms/230VAC	I/P: 115 VAC I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	184/115 VAC 156/230 VAC


INPUT=115VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage

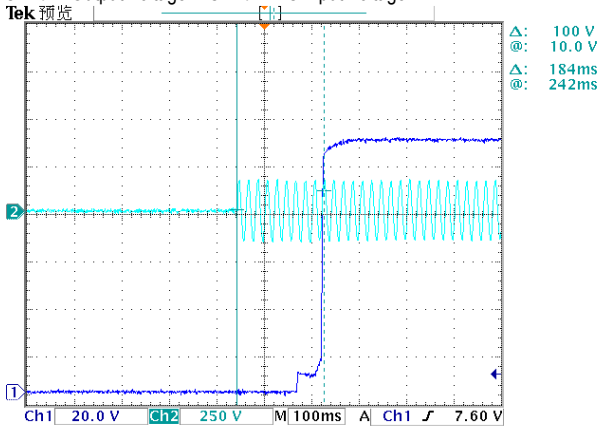

INPUT=230 VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH2: AC Input Voltage


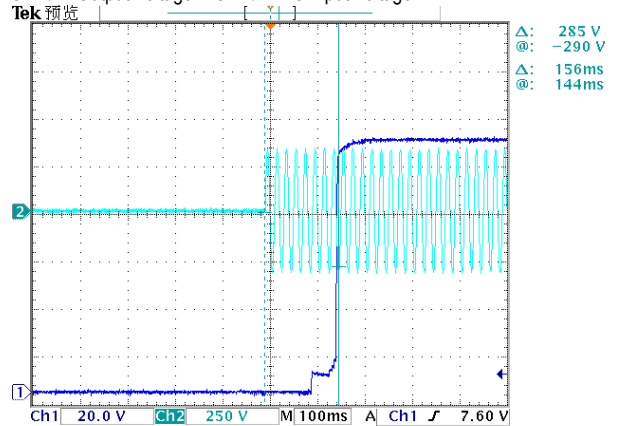


8 DIMMING OPERATION (for AB-Type)



※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



◎ Applying additive 0 ~ 10VDC

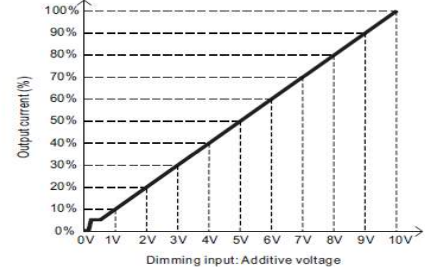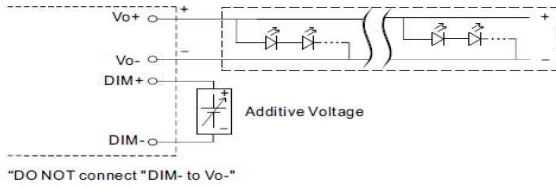

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

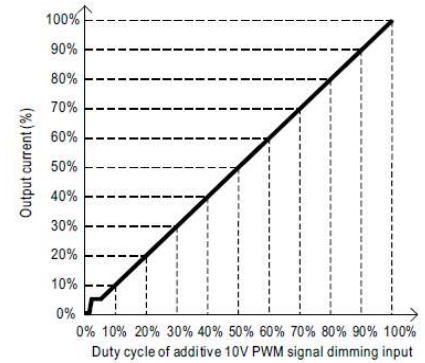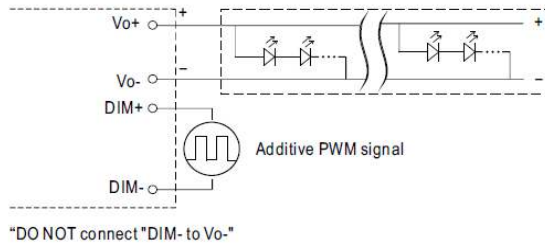

◎ Applying additive resistance:

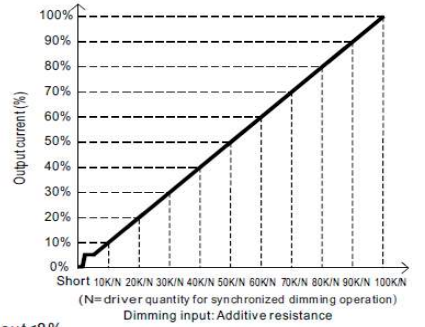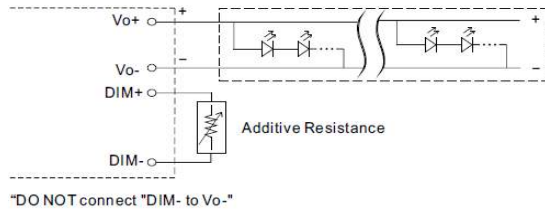

- Note : 1. Min. dimming level is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.
 2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

I/P: 230 VAC

O/P: DIMMING TEST

Ta: 25°C

	DIMMING	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
1	Output Current	0	0.179A	0.309A	0.460A	0.591A	0.744A	0.876A	1.032A	1.165A	1.310A	1.417A	1.417A
	%	0%	12.79%	22.04%	32.88%	42.21%	53.15%	62.59%	73.71%	83.20%	93.54%	101.18%	101.19%
	PWM	0V	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
2	Output Current	0	0.183A	0.312A	0.462A	0.592A	0.738A	0.874A	1.020A	1.158A	1.301A	1.405A	1.405A
	%	0%	13.09%	22.26%	33.00%	42.25%	52.74%	62.40%	72.86%	82.74%	92.93%	100.36%	100.37%
	R	0%	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
3	Output Current	0	0.224A	0.336A	0.471A	0.612A	0.749A	0.824A	0.914A	1.098A	1.212A	1.357A	1.413A
	%	0%	16.02%	23.98%	33.66%	43.71%	53.51%	58.86%	65.31%	78.43%	86.57%	96.93%	100.92%

TEST RESULT: OK




INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	100VAC~305VAC	I/P: TESTING O/P: FULL LOAD (PLEASE CHECK DERATING CURVE) Ta: 25°C	97V~310 V
			I/P: LOW-LINE-3V=97 V HIGH-LINE+10V=315 V O/P: FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	AC CURRENT	1.8A/115VAC 1.0A/230VAC 0.8A/277VAC	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	I = 1.428A/ 115VAC I = 0.697A/ 230VAC I = 0.588A/277VAC
4	LEAKAGE CURRENT	< 0.75mA / 277VAC	I/P: 277 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.337mA N-FG: 0.337mA
5	STANDBY POWER CONSUMPTION	<0.5W for AB -Type	I/P: 230VAC O/P: STANDBY Ta: 25°C	0.42W
6	INRUSH CURRENT(Typ)	230 V/ 50A COLD START (twidth=500us measured at 50% Ipeak) COLD START at 230V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=42A/ 230VAC Twidth = 443.5us

INPUT=230VAC/50HZ @ FULL LOAD

CH2: Input current CH1: AC Input Voltage

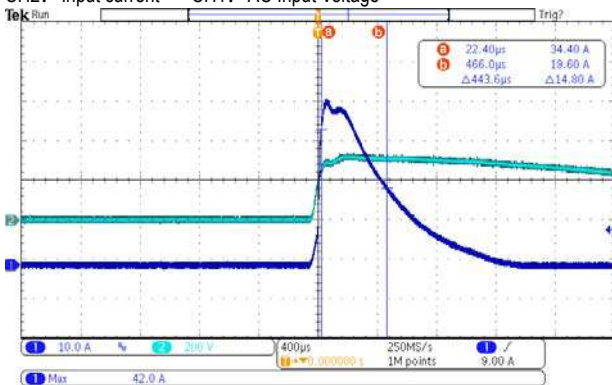




150W Constant Power Mode LED Driver

XLG-150 series


7	POWER FACTOR	0.97/ 115VAC@ FULL LOAD 0.95/ 230VAC@ FULL LOAD 0.92/ 277VAC@ FULL LOAD	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: FULL LOAD Ta: 25°C	PF=0.999 @ FULL LOAD /115VAC PF=0.986 @ FULL LOAD /230VAC PF=0.960 @ FULL LOAD /277VAC
---	--------------	---	--	--

PF vs LOAD

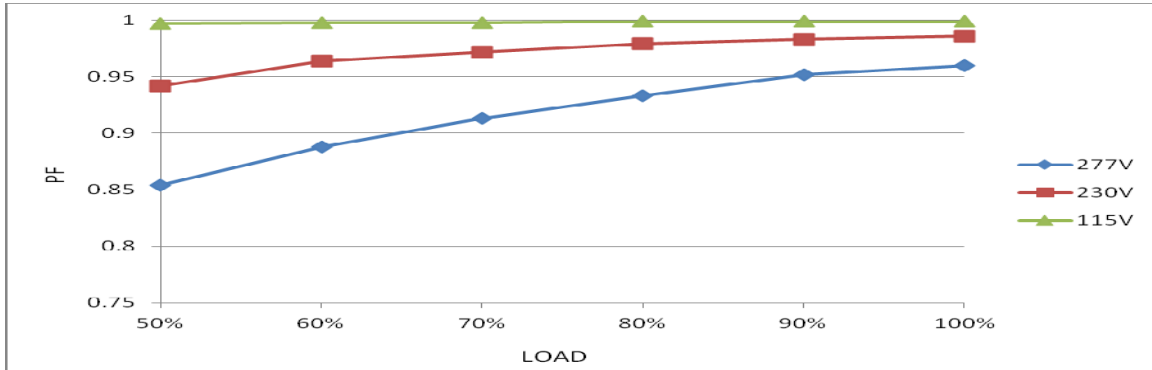


8	TOTAL HARMONIC DISTORTION	THD < 10% (@load ≥ 50%/115VAC; @load ≥ 50%/230VAC; @load ≥ 75%/277VAC)	I/P: 115 VAC I/P: 230 VAC I/P: 277 VAC O/P: 50% /75% LOAD Ta: 25°C	THD=4.77% @50% load /115VAC THD=7.26% @50% load /230VAC THD=7.83% @75% load /277VAC
---	---------------------------	---	--	---

THD vs LOAD

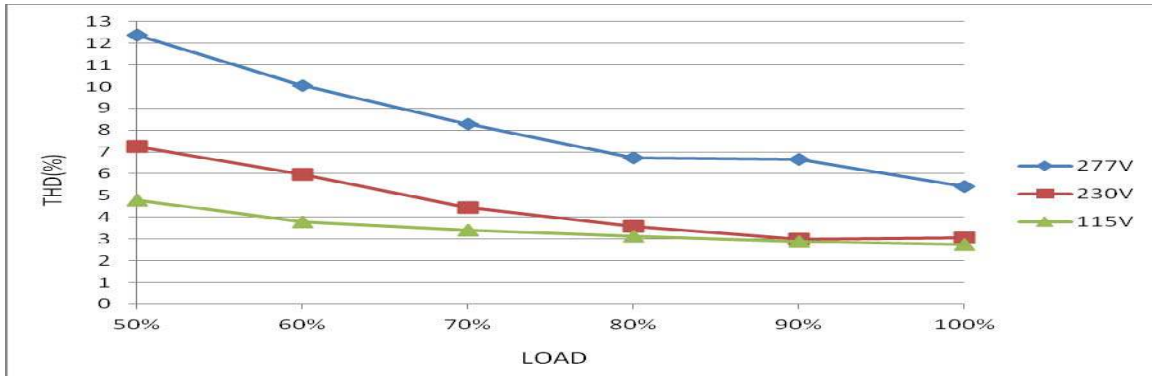

9	EFFICIENCY(Typ)	92.5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	93.27%
---	-----------------	-------	---	--------

EFFICIENCY vs LOAD

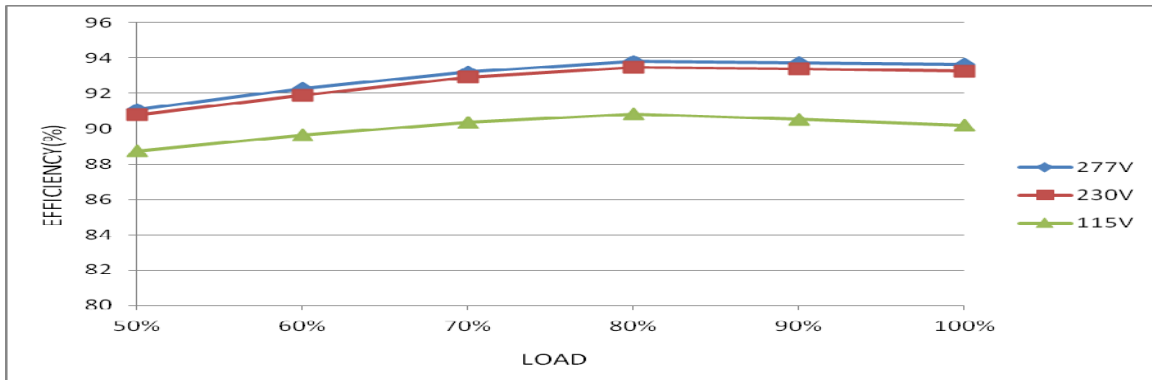

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD	O.T.P. Active Shut down output voltage, re-power on to recovery
2	OVER VOLTAGE PROTECTION	V1: 128V~ 150V	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: MIN LOAD Ta: 25°C	140.3V/ 305VAC 140.3V/ 230VAC 140.2V/ 100VAC Shut down output voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 100VAC I/P: 230VAC I/P: 305VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode or Constant Current Limiting, recovers automatically after fault condition is removed
4	INPUT OVER VOLTAGE (for XLG-150I only)	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage Can survive input voltage stress of 440Vac for 48 hours	I/P: TESTING O/P: FULL LOAD Ta: 25°C	PASS

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5 Rated 11A/600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 474V (2) 458V (3) 454V
2	PFC Transistor	Q1 Rated 10.6A/650V	I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) Full Load continue Ta: 25°C	(1) 466V (2) 462V (3) 462V
3	P.F.C DIODE	D1 Rated 9 A/ 600V	I/P: High-Line +3V =308V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 462V (2) 434V (3) 446V
4	Diode Peak Voltage	Q100 Rated 10A/400V	I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) Full Load continue (4) No Load Ta: 25°C	(1) 215V (2) 20V (3) 211V (4) 223V



150W Constant Power Mode LED Driver

XLG-150 series

5	Input Capacitor Voltage	C5 Rated: 82 μ F / 450V	I/P: High-Line +3V =308 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta: 25°C	(1) 448V (2) 452V (3) 445V (4) 447V
6	Control IC Voltage Test	U1 Rated 27 V	I/P: High-Line +3V =308V O/P:(1)FULL LOAD (2) Output Short (3) O.V.P (4)NO LOAD VR.LOW LINE Ta: 25°C	(1) 12.5V (2) 12.5V (3) 12.6V (4) 12.5V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2KVAC/min O/P-FG: 1.5KVAC/min	I/P-O/P: 4.125KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min Ta: 25°C	I/P-O/P: 3.079mA I/P-FG: 2.585mA O/P-FG: 3.89mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG: 500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >9999M Ω I/P-FG: >9999M Ω O/P-FG: >9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25°C	15m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P: FULL/50% LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY Air: 8KV Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 2KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A



150W Constant Power Mode LED Driver

XLG-150 series

6	SURGE	EN61000-4-5 LIGHT INDUSTRY L-N : 4KV L-PE: 6KV	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																
1	TEMPERATURE RISE TEST	MODEL: XLG-150-L 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 27.1°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=55.1°C																																																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 27.1 °C</th> <th>HIGH AMBIENT Ta=55.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>RTH2</td><td>65.5°C</td><td>85.6°C</td></tr> <tr><td>2</td><td>C2</td><td>57.8°C</td><td>79.7°C</td></tr> <tr><td>3</td><td>C9</td><td>60.2°C</td><td>82.2°C</td></tr> <tr><td>4</td><td>BD1</td><td>61.0°C</td><td>82.6°C</td></tr> <tr><td>5</td><td>ZNR3</td><td>60.8°C</td><td>82.5°C</td></tr> <tr><td>6</td><td>L2</td><td>62.4°C</td><td>84.1°C</td></tr> <tr><td>7</td><td>C10</td><td>62.0°C</td><td>83.5°C</td></tr> <tr><td>8</td><td>Q1</td><td>61.8°C</td><td>83.4°C</td></tr> <tr><td>9</td><td>C5</td><td>66.6°C</td><td>86.2°C</td></tr> <tr><td>10</td><td>D1</td><td>64.9°C</td><td>87.0°C</td></tr> <tr><td>11</td><td>Q5</td><td>66.7°C</td><td>87.4°C</td></tr> <tr><td>12</td><td>Q6</td><td>68.4°C</td><td>88.4°C</td></tr> <tr><td>13</td><td>U1</td><td>60.5°C</td><td>81.8°C</td></tr> <tr><td>14</td><td>U2</td><td>71.2°C</td><td>90.9°C</td></tr> <tr><td>15</td><td>C15</td><td>65.4°C</td><td>85.6°C</td></tr> <tr><td>16</td><td>T1</td><td>80.0°C</td><td>92.4°C</td></tr> <tr><td>17</td><td>T1core</td><td>69.7°C</td><td>88.4°C</td></tr> <tr><td>18</td><td>Q100</td><td>71.4°C</td><td>89.5°C</td></tr> <tr><td>19</td><td>Q101</td><td>72.3°C</td><td>89.1°C</td></tr> <tr><td>20</td><td>C105</td><td>68.1°C</td><td>87.3°C</td></tr> <tr><td>21</td><td>C106</td><td>64.5°C</td><td>83.7°C</td></tr> <tr><td>22</td><td>RTH3</td><td>63.7°C</td><td>84.3°C</td></tr> <tr><td>23</td><td>TC</td><td>56.7°C</td><td>77.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 27.1 °C	HIGH AMBIENT Ta=55.1 °C	1	RTH2	65.5°C	85.6°C	2	C2	57.8°C	79.7°C	3	C9	60.2°C	82.2°C	4	BD1	61.0°C	82.6°C	5	ZNR3	60.8°C	82.5°C	6	L2	62.4°C	84.1°C	7	C10	62.0°C	83.5°C	8	Q1	61.8°C	83.4°C	9	C5	66.6°C	86.2°C	10	D1	64.9°C	87.0°C	11	Q5	66.7°C	87.4°C	12	Q6	68.4°C	88.4°C	13	U1	60.5°C	81.8°C	14	U2	71.2°C	90.9°C	15	C15	65.4°C	85.6°C	16	T1	80.0°C	92.4°C	17	T1core	69.7°C	88.4°C	18	Q100	71.4°C	89.5°C	19	Q101	72.3°C	89.1°C	20	C105	68.1°C	87.3°C	21	C106	64.5°C	83.7°C	22	RTH3	63.7°C	84.3°C	23	TC	56.7°C	77.4°C
NO	Position	ROOM AMBIENT Ta= 27.1 °C	HIGH AMBIENT Ta=55.1 °C																																																																																																	
1	RTH2	65.5°C	85.6°C																																																																																																	
2	C2	57.8°C	79.7°C																																																																																																	
3	C9	60.2°C	82.2°C																																																																																																	
4	BD1	61.0°C	82.6°C																																																																																																	
5	ZNR3	60.8°C	82.5°C																																																																																																	
6	L2	62.4°C	84.1°C																																																																																																	
7	C10	62.0°C	83.5°C																																																																																																	
8	Q1	61.8°C	83.4°C																																																																																																	
9	C5	66.6°C	86.2°C																																																																																																	
10	D1	64.9°C	87.0°C																																																																																																	
11	Q5	66.7°C	87.4°C																																																																																																	
12	Q6	68.4°C	88.4°C																																																																																																	
13	U1	60.5°C	81.8°C																																																																																																	
14	U2	71.2°C	90.9°C																																																																																																	
15	C15	65.4°C	85.6°C																																																																																																	
16	T1	80.0°C	92.4°C																																																																																																	
17	T1core	69.7°C	88.4°C																																																																																																	
18	Q100	71.4°C	89.5°C																																																																																																	
19	Q101	72.3°C	89.1°C																																																																																																	
20	C105	68.1°C	87.3°C																																																																																																	
21	C106	64.5°C	83.7°C																																																																																																	
22	RTH3	63.7°C	84.3°C																																																																																																	
23	TC	56.7°C	77.4°C																																																																																																	
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 305VAC/100VAC O/P: FULL LOAD Ta= -45°C/-35°C	TEST: OK																																																																																																
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 55 °C NO DAMAGE	I/P: 305VAC O/P: FULL LOAD Ta=55 °C HUMIDITY= 95% R.H	TEST: OK																																																																																																
4	TEMPERATURE COEFFICIENT	±0.06%/°C (0~60°C)	I/P: 230 VAC O/P: FULL LOAD	±0.003%/°C (0~60°C)																																																																																																



150W Constant Power Mode LED Driver

XLG-150 series

5	STORAGE TEMPERATURE TEST	-40~+80°C	1. Thermal shock Temperature: -50°C~ +125°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 200CYCLE 5. Input/Output condition: STATIC TEST: OK
6	THERMAL SHOCK TEST	-40~+55°C	1. Thermal shock Temperature: -45°C~ +60°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16CYCLE 5. Input/Output condition: 15cycle:230VAC/ FULL LOAD AC on 3 sec/AC off 1 sec TEST 1cycle:230VAC/ FULL LOAD Burn In Test TEST: OK
7	VIBRATION TEST	10~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 6G (5) Test Time: 180min in each axis (X.Y.Z) (6) Ta: 25°C TEST: OK
8	CAPACITOR LIFE CYCLE	XLG-150-L: SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Tc= 70 °C LIFE TIME (2) I/P: 230VAC O/P: 75% LOAD Tc= 70 °C LIFE TIME (3) I/P: 230VAC O/P: 50% LOAD Tc= 70 °C LIFE TIME	(1) 84075 HRS (2) 94064 HRS (3) 94318 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 712.17 K hrs min. Telcordia SR-332 (Bellcore) 213.3K hrs min. MIL-HDBK-217F (25°C)	
10	Ongoing Reliability Test	I/P: 230VAC O/P: FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/ZHOUB	WENF	LIUWY