



Test Report: LRS-100-12

100W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

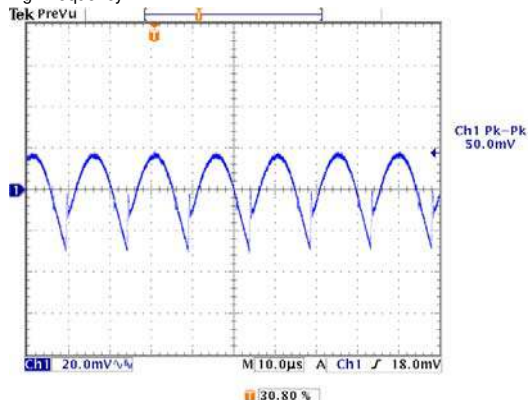
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 10.2 V~ 13.8V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	9.784V~14.565V/230VAC 9.783V~14.539V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1 %~1 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.08%~ 0.08%
3	LINE REGULATION (Max)	V1: 0.5 %~ 0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~0%
4	LOAD REGULATION(Max)	V1: -0.5 %~ 0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0%~ 0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 120 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 56.4mVp-p

high frequency :




low frequency :

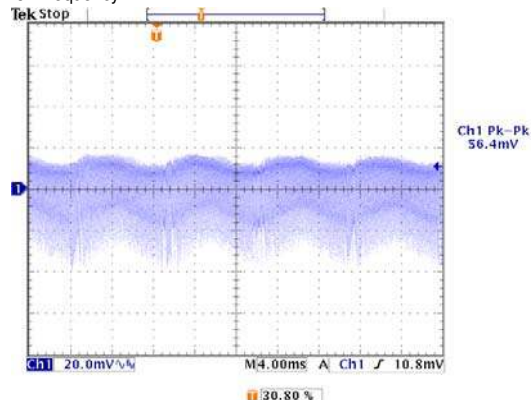

7	SET UP TIME(Max)	230VAC/500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 226ms 115VAC/ 226ms
---	------------------	-------------------------------	--	--------------------------------


INPUT=230VAC/50HZ @ FULL LOAD






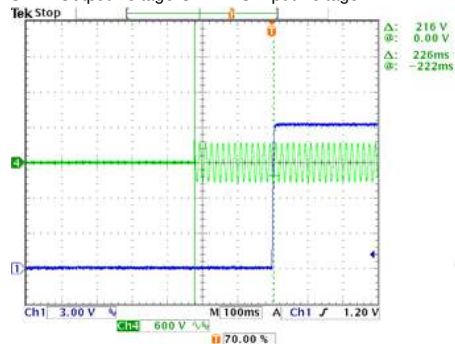
CH1 : Output Voltage CH4 : AC Input Voltage




INPUT=115VAC/60HZ @ FULL LOAD

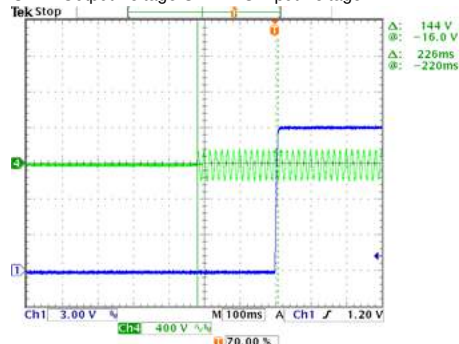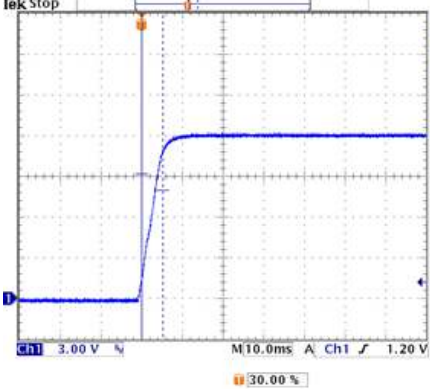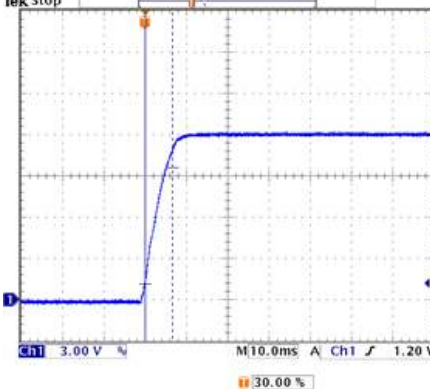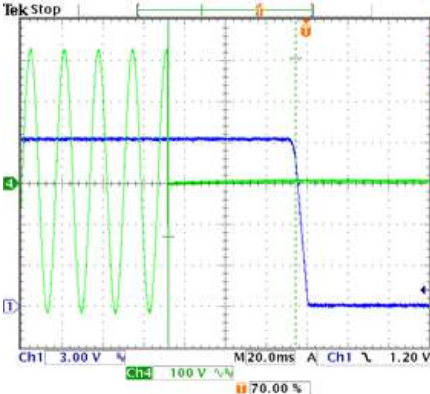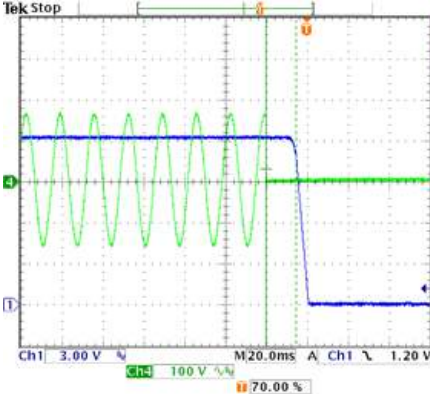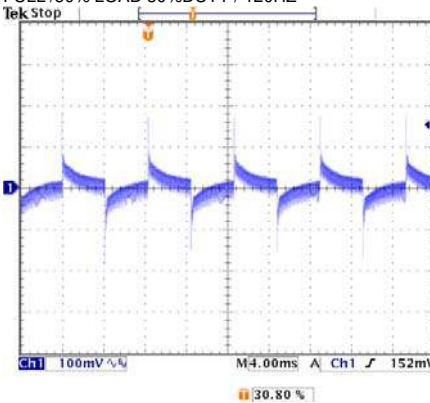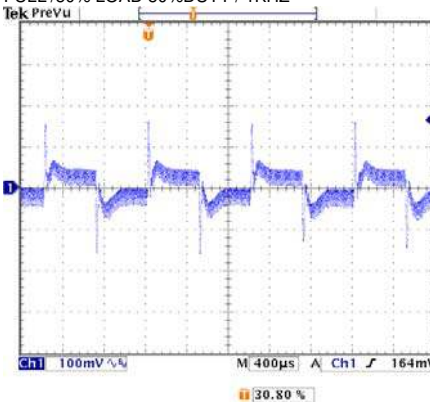
CH1 : Output Voltage CH4 : AC Input Voltage



8	RISE TIME (Max)	230VAC/ 30ms 115VAC/ 30ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 5.20ms 115VAC/6.60ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 			
9	HOLD UP TIME(Typ)	230VAC/ 55ms 115VAC/ 10ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 62.4ms 115VAC/ 14.8ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage 			
10	DYNAMIC LOAD	V1: 1000 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	362mVp-p 322mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ 			
	FULL /50% LOAD 50%DUTY / 1KHZ 			

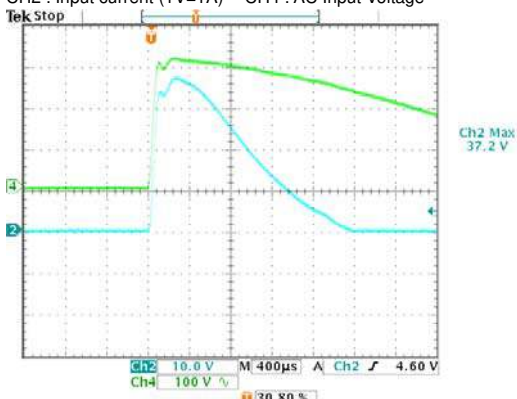INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	76V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 1.2A 115V/ 1.9A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =1.06A/ 230VAC I =1.77A/ 115VAC
4	LEAKAGE CURRENT	< 0.75 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.327 mA N-FG: 0.327 mA
5	NO LOAD CONSUMPTION	< 0.3 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	< 0.13 W < 0.23 W
6	INRUSH CURRENT(Typ)	230V/50A COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =37.2A/ 230VAC
INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage 				
7	EFFICIENCY(Typ)	88%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	88.43%

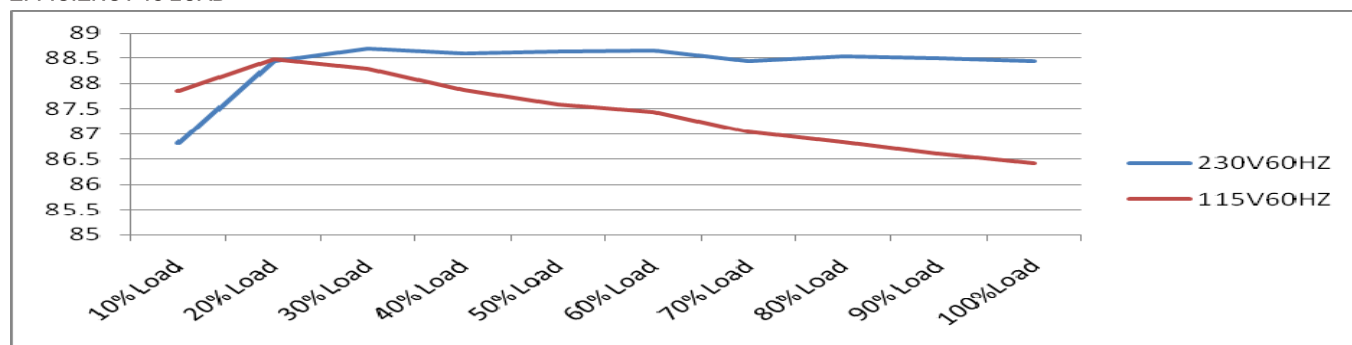EFFICIENCY vs LOAD


PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 150%	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25℃	129.5%/ 230VAC 129.1%/115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	CH:13.8V~16.2V	I/P: 230VAC I/P: 115VAC O/P: MIN LOAD Ta:25℃	15.6V/ 230VAC 15.6V/115VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25℃	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 600 V/11A	I/P: High-Line +3V =267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0%→400% Load. Ta:25℃	(1) 524V (2) 500V (3) 516V (4) 504V (5) 508V (6) 536V (7) 510V
2	Diode Peak Voltage	Q101 Rated 20A/100 V	I/P: High-Line +3V =267 V AC ON/OFF	Q101: (1) 88.8V

			O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25℃	(2) 76.0V (3) 89.6V (4) 90.4V (5) 90.4V (6) 94.0V (7) 88.8V (8) 79.2V
3	Input Capacitor Voltage	C5 Rated: 150 μ /400V 105℃	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25℃	(1)352V (2)356V (3)356V
4	Control IC Voltage Test	PWM IC U1 Rated 28 V(MAX) 9.5V(MIN.	I/P:High-Line +3V =267 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25℃	(1) 19.4V (2) 12.1V (3) 20.3V (4) 22.3V (5) 14.1V
5	Clamp Diode Peak Voltage	D 5 Rated: GP20K 800 V 2 A	I/P: High-Line +3V = 267 V AC ON/OFF O/P: (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta: 25℃	(1)448V (2)440V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25℃	I/P-O/P:2.1mA I/P-FG:1.9mA O/P-FG:1.02mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P:999 M Ω I/P-FG: 999M Ω O/P-FG:999 M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25℃	7m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: FULL LOAD Ta:25℃	PASS



100W Single Output Switching Power Supply

LRS-100series

2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL/50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL: LRS-100-5			
		1. ROOM AMBIENT BURN-IN: 2 HRS			
		I/P: 230VAC O/P: FULL LOAD Ta=18.6℃			
		2. HIGH AMBIENT BURN-IN: 2 HRS			
		I/P: 230VAC O/P: FULL LOAD Ta=42.1℃			
		NO	Position	ROOM AMBIENT Ta= 18.6 ℃	HIGH AMBIENT Ta=42.1 ℃
		1	U100	79.3℃	105.1℃
		2	U1	52.7℃	77.6℃
		3	LF1	47.5℃	73.3℃
		4	BD1	54.3℃	78.8℃
		5	C5	46.7℃	69.7℃
		6	D5	62.0℃	89.9℃
		7	Q1	55.5℃	83.9℃
		8	C35	59.5℃	85.4℃
		9	D31	61.9℃	90.1℃
		10	T1coil	73.7℃	101.9℃
		11	C105	67.3℃	95.3℃
		12	Q100	70.3℃	98.6℃
		13	Q101	70.5℃	98.6℃
		14	L100	63.4℃	90.9℃
15	RTH1	83.0℃	96.0℃		
16	C107	64.9℃	93.0℃		
17	R7	74.7℃	101.0℃		
18	R15	59.2℃	88.4℃		



100W Single Output Switching Power Supply

LRS-100series

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 125 % LOAD Ta: 25℃	TEST: OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 % LOAD Ta= -20 ℃	TEST: OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 ℃ NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 45℃ HUMIDITY= 95 %R.H	TEST: OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃ (0~50℃)	I/P: 230 VAC O/P: FULL LOAD	±0.009%/℃ (0~40℃)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45℃ ~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30℃ ~ 70℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25℃		TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=45 ℃ LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 45 ℃ LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 45 ℃ LIFE TIME		(1) 157680HRS (2) 39885HRS (3) 99776HRS (4) 175200HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 720.6 KHRS		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50℃		

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014