



Test Report: RS-15-48

15W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 43.2V~52.8V	I/P : 230 VAC O/P : MIN LOAD Ta : 25°C	39.92V~57.22V
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1 : -1.0%~1.0%	I/P: 85VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1 : -0.02%~0.02%
3	LINE REGULATION (Max)	V1: -0.5%~0.5%	I/P: 85VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1 : -0.01%~0.01%
4	LOAD REGULATION(Max)	V1: -0.5%~0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1 : -0.02%~0.02%
5	OVER/UNDERSHOOT TEST	< $\pm 5\%$	I/P: 230VAC O/P:FULL LOAD Ta:25°C	1.3%
6	RIPPLE & NOISE(Max)	V1: 200mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 149mVp-p

high frequency (V1) :

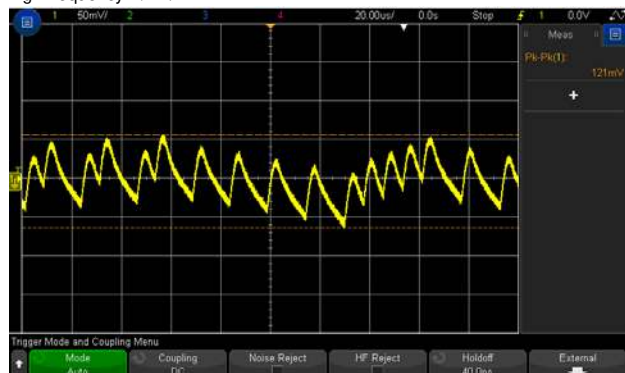


low frequency (V1) :

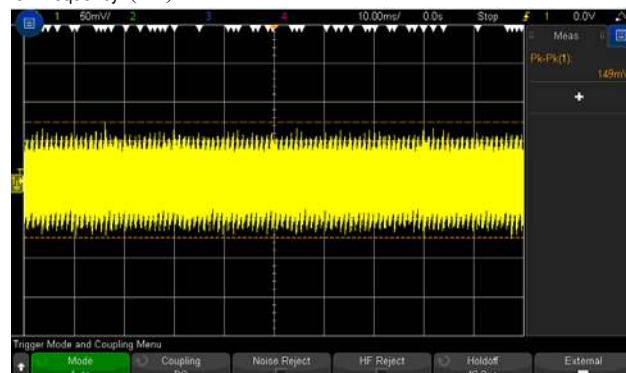

7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/12.2ms 115VAC/ 17.2ms
---	------------------	--------------------------------	--	---------------------------------


INPUT=230VAC/50HZ @ FULL LOAD







CH1 : Output Voltage CH2 : AC Input Voltage

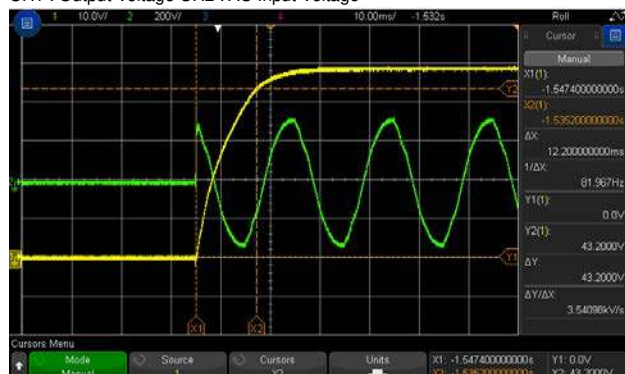

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

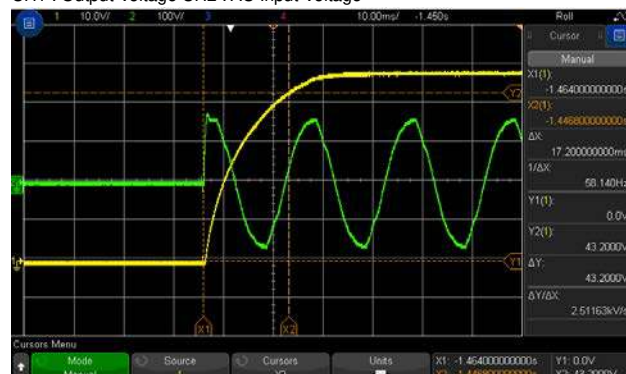


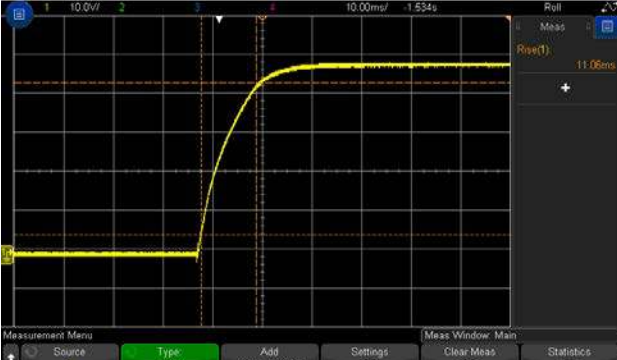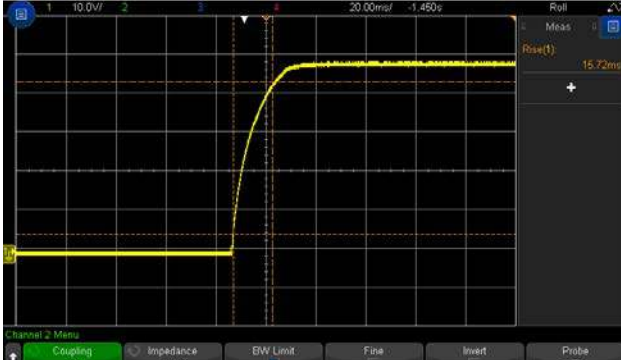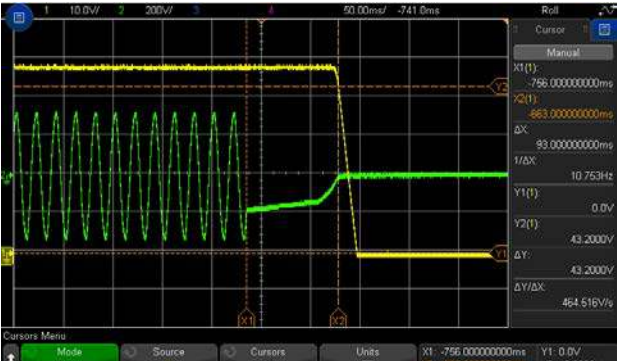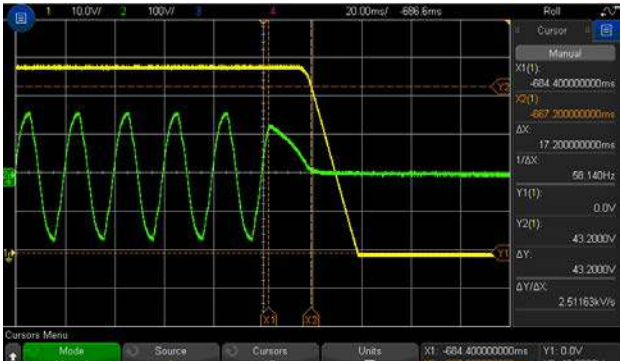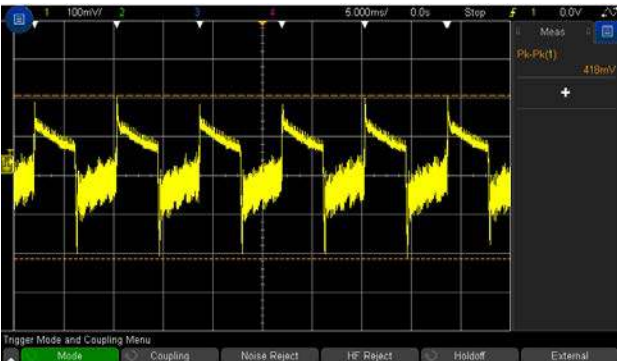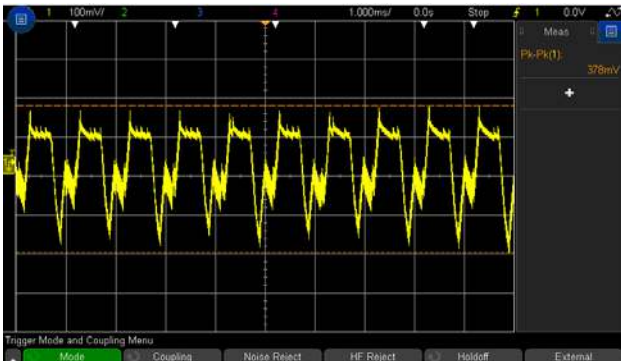8	RISE TIME (Max) 230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/11.06ms 115VAC/15.72ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 	
9	HOLD UP TIME (Typ.) 230VAC/70ms 115VAC/12ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/93.0ms 115VAC/17.2ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 	
10	DYNAMIC LOAD V1: 4800 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	(1) 418mVp-p (2) 378mVp-p
FULL /50% LOAD 50%DUTY / 120HZ (V1) 		FULL /50% LOAD 50%DUTY / 1KHZ (V1) 	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~370VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	73V~264VAC 120VDC~370VDC
			I/P: LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:85 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.25A 115V/0.35A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.16A/ 230VAC I = 0.25A/ 115VAC
4	LEAKAGE CURRENT	<2mA	I/P : 240VAC O/P : Min LOAD Ta : 25°C	0.15mA
5	NO LOAD POWER CONSUMPTION	< 0.5W	I/P : 230 VAC O/P : Min LOAD Ta : 25°C	0.45W
6	EFFICIENCY(Typ.)	82%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	84.8%


EFFICIENCY vs LOAD

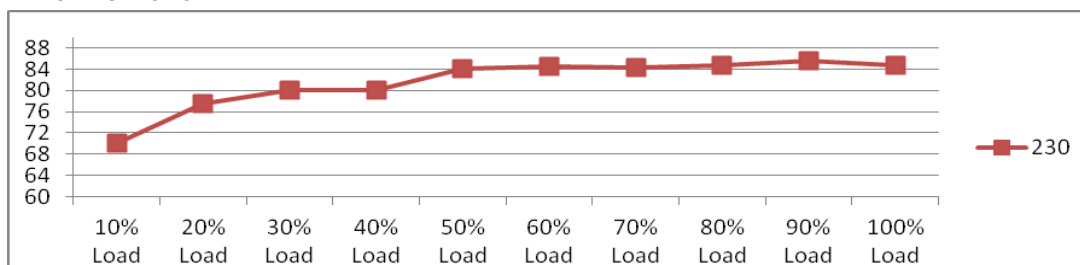

7	INRUSH CURRENT(Typ.)	230V / 65A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I =45.6 A/ 230VAC
---	----------------------	--------------------------	---	-------------------

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

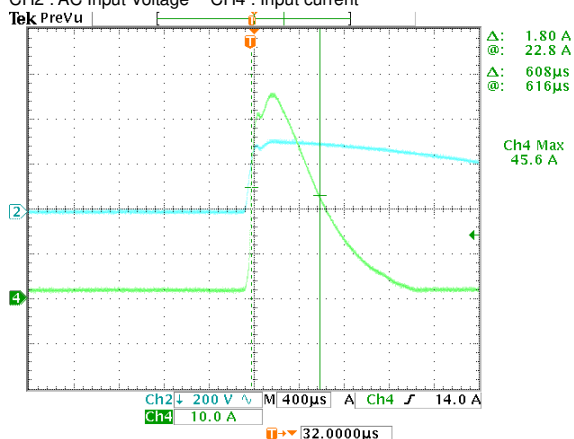

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	> 105%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	158%/ 264VAC 147%/ 230VAC 124%/ 100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	55.2V~64.8V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	63.1V/ 264VAC 63.0V/ 230VAC 63.0V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, repower on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
4	OVER TEMPERATURE PROTECTION	Protection type : Shut down	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	U1 Rated : 700 V	AC ON/OFF I/P: High-Line +3V = 267V VDS: O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta: 25°C	VDS: (1) 604V (2) 656V (3) 604V
2	O/P Diode	D100 Rated : 400 V	AC ON/OFF I/P: High-Line +3V = 267 V O/P: (1) Full Load (2) Output Short (3) Full Load Continue Ta: 25°C	VDS: (1) 286V (2) 246V (3) 286V
3	Input Capacitor Voltage	C5 Rated : 33 μ / 400 V	I/P: High-Line +3V = 267V O/P: (1) Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta: 25°C	(1) 395V (2) 379V (3) 379V (4) 379 V
4	Clamp Diode	D1 Rated : 1000 V	AC ON/OFF I/P : High-Line +3V = 267 V O/P : (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta: 25°C	(1) 620V (2) 588V (3) 616V (4) 616V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2 KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P- FG: 2.4 KVAC/min O/P - FG: 0.6 KVAC/min Ta:25°C	I/P-O/P:1.42mA I/P-FG:0.79mA O/P-FG:0.67mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P- FG:500VDC>100MΩ O/P- FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P- FG: 600 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta: 25°C/70%RH	8 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	☒ PASS ☐ FAIL
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 ☒ LIGHT INDUSTRY AIR: 8KV / Contact: 4KV ☐ INDUSTRY AIR: 8KV / Contact: 4KV ☐ Din rail Model : AIR: 15KV / Contact: 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 ☒ LIGHT INDUSTRY INPUT : 1KV ☐ MEDICAL ☐ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 ☐ LIGHT INDUSTRY L-N : 1KV L/N-PE : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																												
1	TEMPERATURE RISE TEST	MODEL : RS-15-24 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 23 °C 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 48.2 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 23 °C</th><th>HIGH AMBIENT Ta= 48.2 °C</th></tr><tr><td>1</td><td>LF1</td><td>49.5°C</td><td>73.7°C</td></tr><tr><td>2</td><td>T1</td><td>68.4°C</td><td>90.7°C</td></tr><tr><td>3</td><td>D100</td><td>68.3°C</td><td>89.9°C</td></tr><tr><td>4</td><td>U1</td><td>77.9°C</td><td>101.9°C</td></tr><tr><td>5</td><td>L100</td><td>50.7°C</td><td>73.6°C</td></tr><tr><td>6</td><td>C5</td><td>43.4°C</td><td>67.7°C</td></tr><tr><td>7</td><td>C105</td><td>49.5°C</td><td>72.7°C</td></tr><tr><td>8</td><td>BD1</td><td>48.0°C</td><td>71.5°C</td></tr><tr><td>9</td><td>D1</td><td>49.4°C</td><td>73.1°C</td></tr><tr><td>10</td><td>ZD1</td><td>50.1°C</td><td>73.4°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 23 °C	HIGH AMBIENT Ta= 48.2 °C	1	LF1	49.5°C	73.7°C	2	T1	68.4°C	90.7°C	3	D100	68.3°C	89.9°C	4	U1	77.9°C	101.9°C	5	L100	50.7°C	73.6°C	6	C5	43.4°C	67.7°C	7	C105	49.5°C	72.7°C	8	BD1	48.0°C	71.5°C	9	D1	49.4°C	73.1°C	10	ZD1	50.1°C	73.4°C
NO	Position	ROOM AMBIENT Ta= 23 °C	HIGH AMBIENT Ta= 48.2 °C																																													
1	LF1	49.5°C	73.7°C																																													
2	T1	68.4°C	90.7°C																																													
3	D100	68.3°C	89.9°C																																													
4	U1	77.9°C	101.9°C																																													
5	L100	50.7°C	73.6°C																																													
6	C5	43.4°C	67.7°C																																													
7	C105	49.5°C	72.7°C																																													
8	BD1	48.0°C	71.5°C																																													
9	D1	49.4°C	73.1°C																																													
10	ZD1	50.1°C	73.4°C																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 144% LOAD Ta : 25°C	TEST : OK																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -25 °C	TEST : OK																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C / 95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																												
5	TEMPERATURE COEFFICIENT	± 0.03%/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.0082 %/°C (0~50°C)																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test		TEST : OK																																												



15W Single Output Switching Power Supply

RS-15 series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=50 °C LIFE TIME	(1) 395123.3 HRS (2) 80235 HRS (3) 107747.1 HRS (4) 150465.3 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1608.8K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		Wangdz

2018.4.30 GP-A50-F010