



Test Report: UHP-750-36

750W Slim Type with PFC Switching Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 36V~ 43.2V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	33.86V~44.24V/230VAC 33.95V~44.57V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1%~ -1%	I/P: 90VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0.16%~ -0.08%
3	LINE REGULATION (Max)	V1: 0.5%~ -0.5%	I/P: 180VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0.02%~ 0%
4	LOAD REGULATION(Max)	V1: 0.5%~ -0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0%~ -0.05%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< ±5%
6	RIPPLE & NOISE(Max)	V1: 250mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 105mVp-p

high frequency :

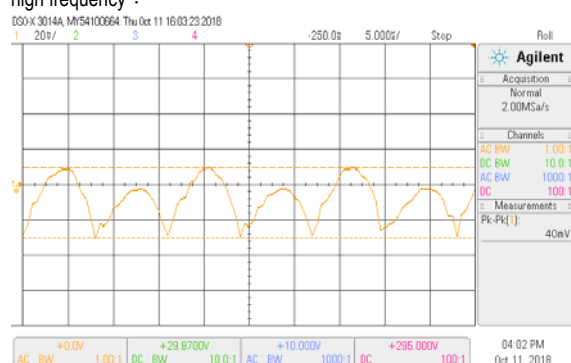


low frequency :

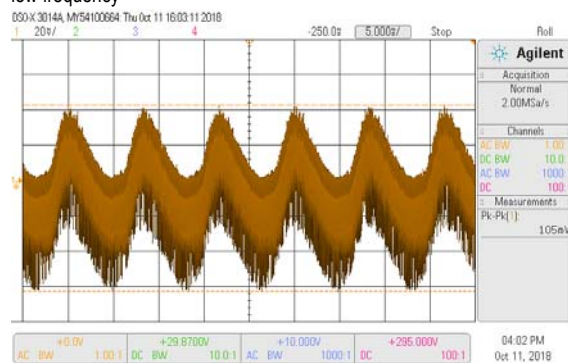

7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1000ms	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : 75% LOAD Ta : 25°C	230VAC/ 251.6ms 115VAC/ 275.2ms
---	------------------	--------------------------------	--	------------------------------------


INPUT=230VAC/50HZ @ FULL LOAD





CH1 : Output Voltage CH2 : AC Input Voltage

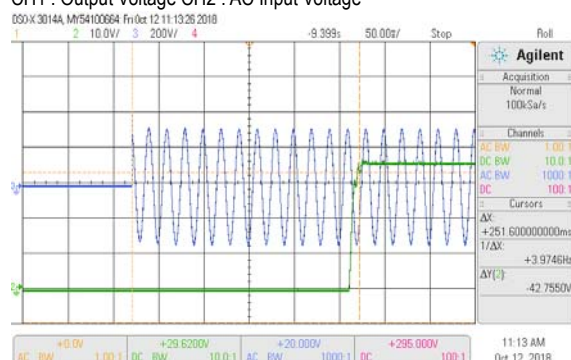


INPUT=115VAC/60HZ @ 75% LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

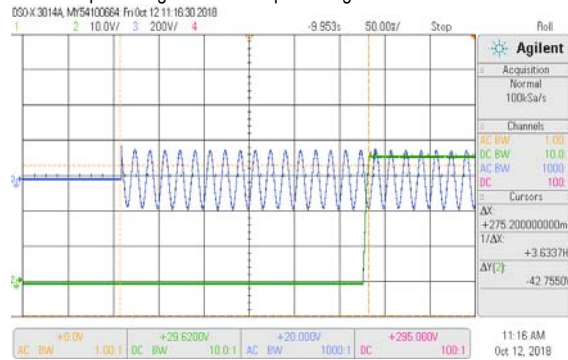

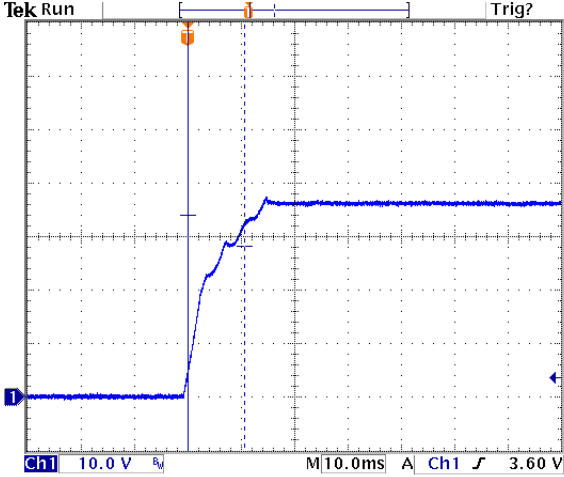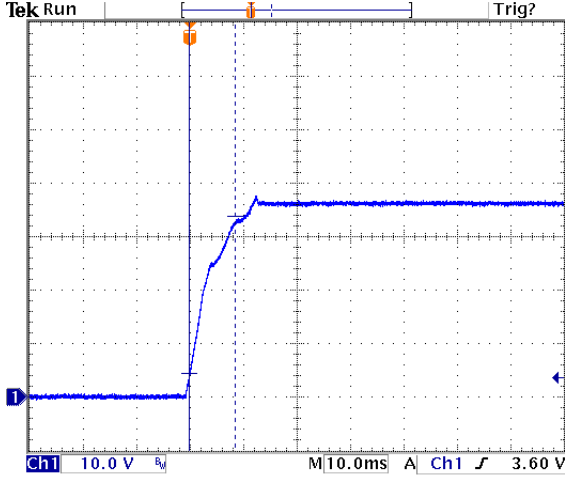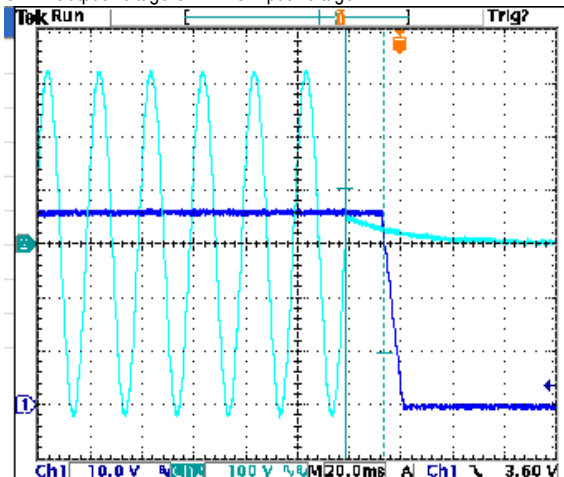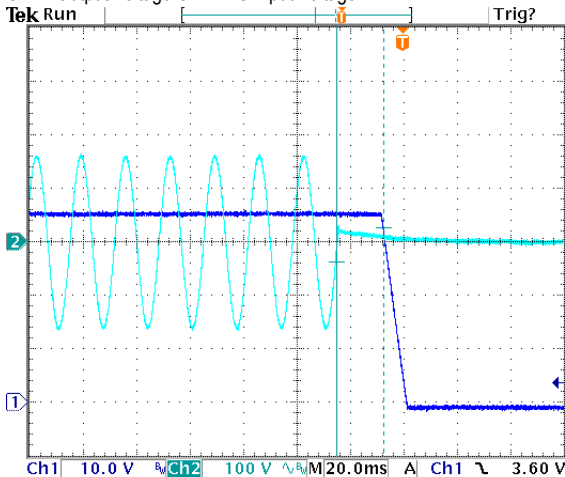8	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : 75% LOAD Ta : 25°C	230VAC/ 10.6 ms 115VAC/ 8.6 ms
	<div> <div> INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage </div> <div>  </div> </div> <div data-kind="ghost"></div> <div data-kind="ghost"></div> <div data-kind="ghost"></div> <div> <div> INPUT=115VAC/60HZ @ 75% LOAD CH1 : Output Voltage </div> <div>  </div> </div>			
9	HOLD UP TIME (Typ.)	230VAC/12ms 115VAC/12ms	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : 75% LOAD Ta : 25°C	230VAC/ 15.2ms 115VAC/ 17.6ms
	<div> <div> INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage </div> <div>  </div> </div> <div data-kind="ghost"></div> <div data-kind="ghost"></div> <div data-kind="ghost"></div> <div> <div> INPUT=115VAC/60HZ @ 75% LOAD CH1 : Output Voltage CH2 : AC Input Voltage </div> <div>  </div> </div>			
10	DYNAMIC LOAD	V1: 3600mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	209mVp-p 223mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ	

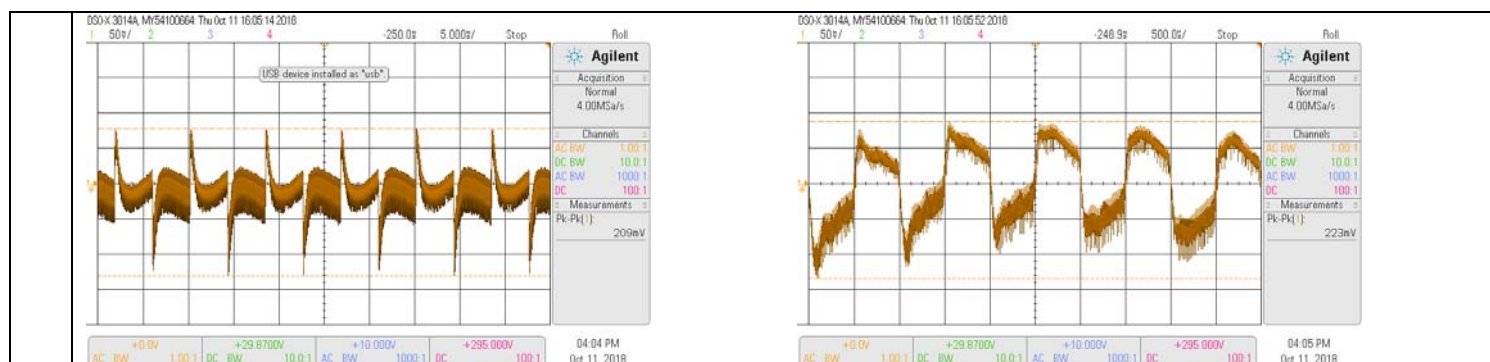

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25℃	79V~264V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25℃	TEST:OK
3	INPUT CURRENT (Typ.)	230V/ 3.8 A 115V/ 7.5 A	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : FULL LOAD Ta : 25℃	I =3.5A/ 230VAC I =7.22A/ 115VAC
4	LEAKAGE CURRENT	< 0.75mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25℃	L-FG : 0.35mA N-FG : 0.35mA
5	POWER FACTOR (Typ.)	0.95/ 230VAC 0.99/115VAC	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : FULL LOAD Ta : 25℃	PF=0.96/230VAC PF=0.99/115VAC
	P.F vs LOAD			

6	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.44%
	EFFICIENCY vs LOAD			
7	INRUSH CURRENT(Typ.)	230V/40A 115V/20A COLD START	I/P : 230 VAC O/P : FULL LOAD I/P : 115 VAC O/P : 75% LOAD Ta : 25°C	I =24.3A/ 230VAC I =11.1A/ 115VAC T50= 1850us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current INPUT=115VAC/ 60HZ @ 75% LOAD CH2 : AC Input Voltage CH4 : Input current			

8	NO LOAD CONSUMPTION	---	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	4.36 W/115VAC 3.92 W/230VAC
---	---------------------	-----	--	--------------------------------

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 125% Protection type : Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 180VAC O/P: TESTING Ta: 25°C	114.53%/ 264VAC 114.53%/ 230VAC 114.53%/180VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	43.5V~49V Protection type : Shut down O/P voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta: 25°C	45.767V/ 264VAC 45.9V/ 230VAC 45.53V/ 90VAC PROTECTION TYPE : Shut down O/P voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type : Shut down O/P voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down O/P voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type : Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	30VDC/1A RESISTIVE LOAD	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	TEST : OK

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q900 Rated 31A/ 650 V	I/P: High-Line +3V = 300V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7) 0% → 400% Load.	VDS: (1) 448V (2) 500V (3) 448V (4) 448V (5) 448V (6) 452V (7) 496V

			Ta:25℃	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 31A/ 650 V	I/P:High-Line +3V =300V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25℃	VDS: (1)500V (2)476V (3)468V (4)472V (5)480V (6)488V (7)468V
3	P.F.C DIODE	D8 Rated 15 A/ 600 V	I/P:High-Line +3V =300V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25℃	(1) 456V (2) 452V (3) 456V (4) 452V
4	Diode Peak Voltage	Q100 Rated VDS : 150V Q102 Rated VDS : 150V	I/P:High-Line +3V =300V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25℃	Q100: VDS: (1)80.9V (2)80.1V (3)80.1V (4)81.8V (5)81.8V (6)81.8V (7)77.7V (8)77.7V Q102: VDS: (1)82.6V (2)82.6V (3)82.6V (4)84.2V (5)82.6V (6)83.4V (7)80.9V (8)72.9V
5	Input Capacitor Voltage	C5 Rated: : 150μ/ 450 V SURGE VOLTAGE:500V	I/P:High-Line +3V =300V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25℃	(1)449V (2)432V (3)449V (4)449V
6	Control IC Voltage Test	PFC IC U1 Rated 10.5V~ 20V PWM IC U2 Rated 8.85V~ 16 V O/P IC U101 Rated 8V~ 24V	I/P:High-Line +3V =300V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(LOW LINE) Ta:25℃	U1 (1) 14.6V (2) 13.4V (3) 11.6V (4) 13.6V (5) 13.48V U2 (1) 14V (2) 13V (3) 11.8V U101 (1) 11.2V (2) 4V (3) 4.2V (4) 11.31V (5) 9.54V

				(4) 13V (5) 12.76V	
--	--	--	--	-----------------------	--

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG: 2KVAC/min O/P-FG: 1.25KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.5KVAC/min Ta: 25°C	I/P-O/P: 5.41mA I/P-FG: 4.98mA O/P-FG: 4.33mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG: 500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: >30GΩ I/P-FG: >30GΩ O/P-FG: >30GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta: 25°C	18mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare. Any contradictions of the test results, please refer to the latest EMC test report.			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : UHP-750-24 (Operate with additional aluminum plate) 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta=25°C 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50 °C		

			NO	Position	ROOM AMBIENT Ta=25℃	HIGH AMBIENT Ta= 50℃
			1	BD2	67.6℃	85.8℃
			2	BD1	67.6℃	86.9℃
			3	LF1	52.9℃	71.5℃
			4	LF2	59.2℃	77.4℃
			5	LF3	58.5℃	77.2℃
			6	C2	53.5℃	72.0℃
			7	C10	68.4℃	86.6℃
			8	R5	72.3℃	90.9℃
			9	L1	81.4℃	99.3℃
			10	L2	83.2℃	101.6℃
			11	Q1	62.3℃	81.0℃
			12	Q2	64.9℃	83.6℃
			13	Q900	77.2℃	97.8℃
			14	Q901	80.3℃	101.2℃
			15	C426	66.6℃	86.1℃
			16	T1-1	85.8℃	110.3℃
			17	T1-2	91.4℃	112.9℃
			18	T2-1	84.6℃	109.1℃
			19	T2-2	88.7℃	109.9℃
			20	C120	63.8℃	85.8℃
			21	C118	66.2℃	87.9℃
			22	C116	66.6℃	87.7℃
			23	C126	52.6℃	74.7℃
			24	R131	57.4℃	78.4℃
			25	C251	68.3℃	89.4℃
			26	RY11	55.3℃	78.6℃
			27	TSW1	65.8℃	85.0℃
			28	C5	62.4℃	80.6℃
			29	RY1	62.4℃	79.9℃
			30	C920	65.7℃	85.1℃
			31	U1	57.4℃	76.3℃
			32	D8	62.9℃	82.5℃
			33	U101	70.6℃	91.8℃
			34	Q101	64.4℃	86.0℃
			35	Q103	62.9℃	84.0℃
			36	Q200	73.9℃	95.2℃
			37	Q202	64.6℃	86.1℃
			38	C17	66.3℃	85.6℃
			39	C410	76.8℃	96.2℃
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 110% LOAD Ta : 25℃		TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/180VAC O/P : 100 % LOAD Ta= -35 ℃		TEST : OK	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 ℃ HUMIDITY= 95 %R.H		TEST : OK	
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃(0~50℃)	I/P : 230 VAC O/P : FULL LOAD		± 0 %/℃(0~50℃)	

6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C ~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35°C ~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C120 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 207728HRS (2) 46146HRS (3) 107128HRS (4) 176818HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 279.97K hrs min. Telcordia SR-332 (Bellcore) ; 104.86K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing reliability test	I/P : 230VAC O/P : FULL LOAD TA=50 °C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2018.4.30 GP-A50-F010