



TEST REPORT: IRM-01-12

1W Single Output Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

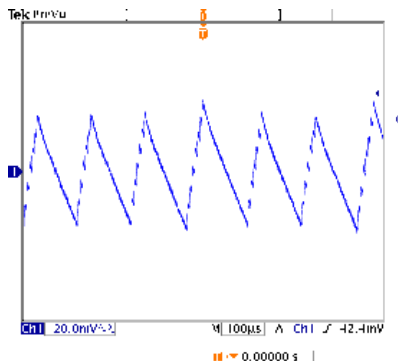
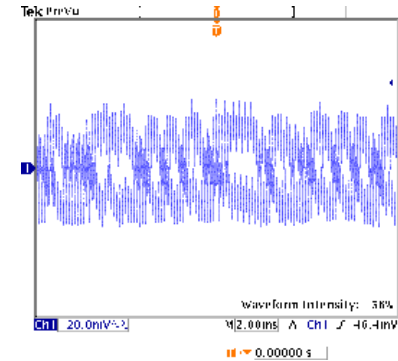
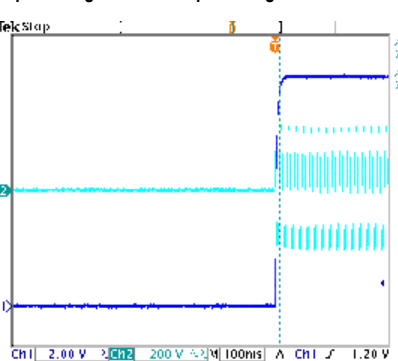
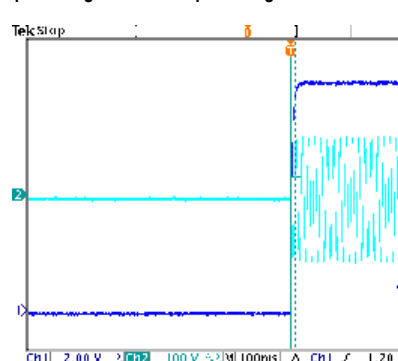
Safety Test

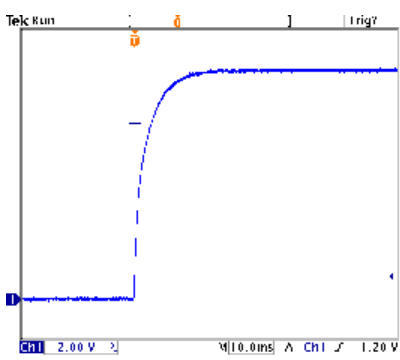
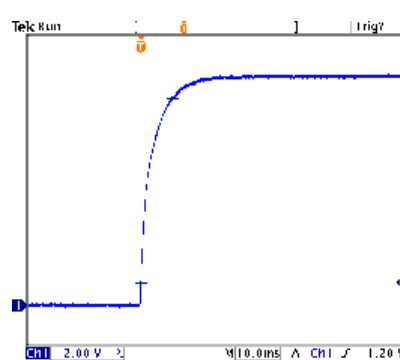
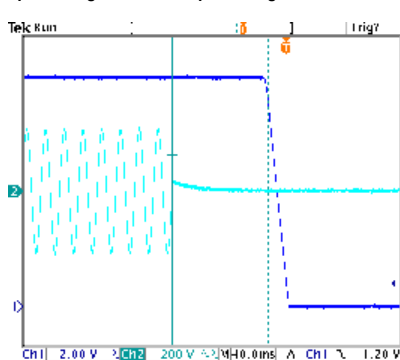
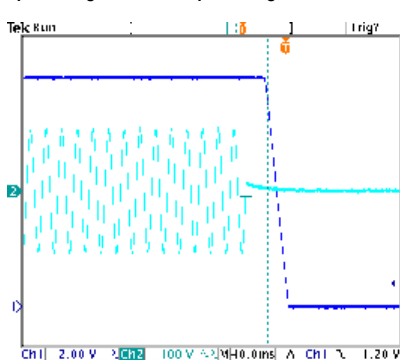
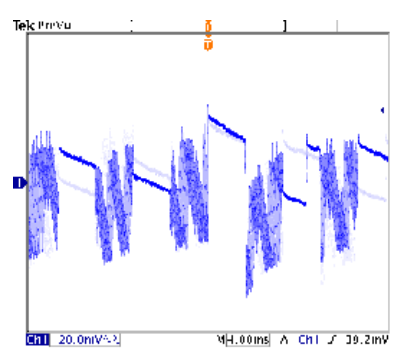
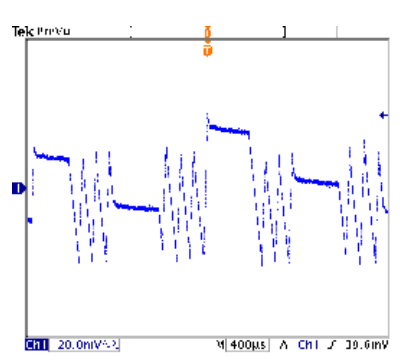
E.M.C. Test

■ RELIABILITY TEST

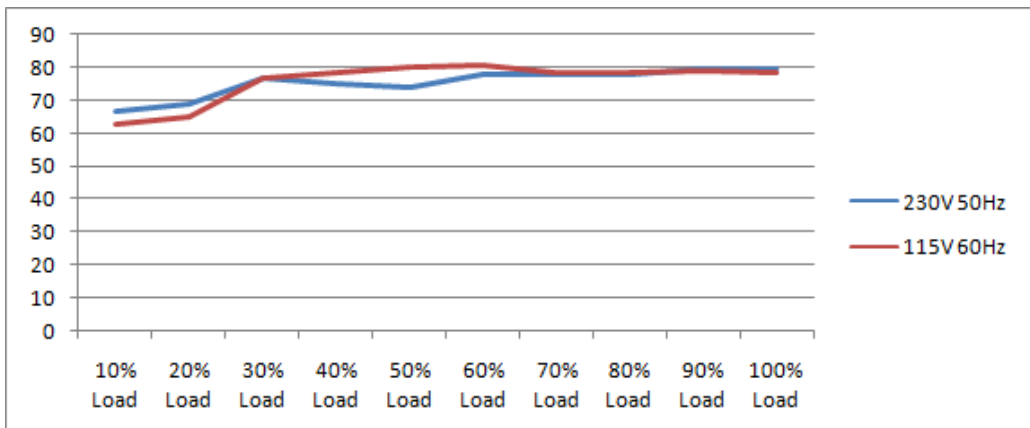
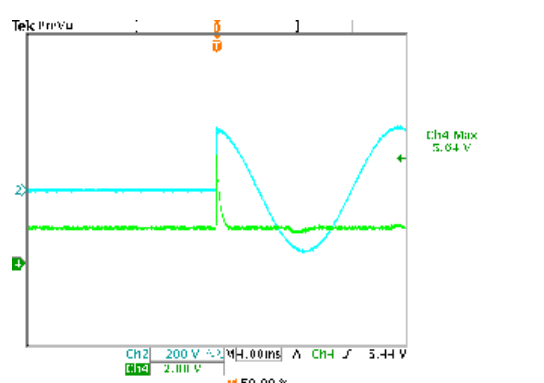
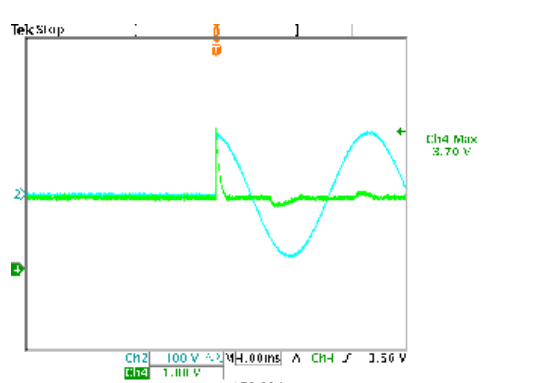
ENVIRONMENT TEST

DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	OUTPUT VOLTAGE RANGE	CH1: 11.88V ~ 12.12V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 11.95V	
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.5% ~ -2.5%	I/P : 100VAC / 305VAC O/P: FULL / MINLOAD TA= 25°C	V1: -0.42% ~ -0.50%	
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 100VAC / 305VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ -0.08%	
4	LOAD REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.00% ~ -0.08%	
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 3.36 %	
6	RIPPLE & NOISE(Max)	V1 : 150 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 72.8 mVp-p	
		high frequency :		low frequency :	
					
7	SET UP TIME (MAX.)	230VAC : 600ms 115VAC : 600ms	I/P : 230VAC I/P : 115VAC	230VAC : 14ms 115VAC : 12ms	
		INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
					
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 8.4ms 115VAC : 8.4ms	

8	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
				
	HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 102.0ms 115VAC : 23.2ms
9	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
				
	DYNAMIC LOAD	V1 : 1200 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25°C	V1: (1). 104.0mv (2). 82.8mv unit:mVp-p
10	FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ	
				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 305VAC 120VDC ~ 430VDC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	44.0VAC ~ 305VAC 77VDC ~ 430VDC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 315VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 100VAC ~ 305VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.018A / 230VAC 0.025A / 115VAC 0.016A / 277VAC	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 0.01000A / 230VAC I= 0.02000A / 115VAC I= 0.00940A / 277VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P : 277VAC O/P: MIN LOAD TA : 25°C	L-FG: 0.0709 mA N-FG: 0.0708 mA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P: MIN LOAD TA : 25°C	< 0.0344 W
6	EFFICIENCY (TYP.)	74.0%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	79.38 %
				
7	INRUSH CURRENT (TYP.)	10A / 230VAC 5A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 5.64A / 230VAC I= 3.70A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage		
7				
		INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage		
7				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	> 110%	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	766.0% 305VAC 646.0% 230VAC 478.0% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	12.60V ~ 16.20V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	15.10V 305VAC 15.10V 230VAC 15.10V 85VAC Shut off o/p voltage, clamping by zener diode
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 700V 0.4A	I/P : 315VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 315VAC VDS: (1). 638.00V (2). 674.00V (3). 628.00V
2	Input Capacitor	C6 Rated : 5uf 450V	I/P : 315VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 438.00V (2). 440.00V (3). 440.00V
3	Control IC	U1 Rated : 9.00V (max) -0.3V (min)	I/P : 315VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 6.56V (2). 6.36V (3). 6.36V (4). 6.56V
5	O/P Diode	D100 Rated : 80V 2.0A	I/P : 315VAC O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1). 67.20V (2). 54.80V (3). 66.80V
6	Clamp Diode	D1 Rated : 1000V 1.0A	I/P : 315VAC O/P : (1)Full load continue Ta : 25°C	(1). 606.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.000KVAC /min	I/P-O/P: 3.300KVAC /min Ta : 25°C	I/P-O/P: 0.50mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE



E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT		
1	TEMPERATURE RISE TEST	MODEL : IRM-01-12				
		1. ROOM AMBIENT BURN-IN : 1.0hrs				
		IP: 230VAC O/P: 100% LOAD TA= 15.9℃				
		2. HIGH AMBIENT BURN-IN : 1.0hrs				
		IP: 230VAC O/P: 100% LOAD TA= 75.0℃				
		NO. Position ROOM AMBIENT 15.9℃ HIGH AMBIENT Ta: 75.0℃				
		1 C101 27.1℃ 82.4℃				
		2 T1 28.9℃ 84.5℃				
		3 C6 24.9℃ 82.2℃				
		4 BD1 26.1℃ 83.5℃				
		5 R2 24.6℃ 82.1℃				
2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230VAC	TEST : OK		
		1 HOUR (MIN)	O/P : 538.92% LOAD			
			Ta : 25℃			
		3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE	I/P : 305VAC / 100VAC	TEST : OK
		1 HOUR (MIN)	O/P : FULL LOAD			
			Ta : -30.0℃			
		4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS	I/P : 315VAC	TEST : OK
				IN CHAMBER ON	O/P : FULL LOAD	
				CONTROL 75℃	Ta : 75℃	
		5	TEMPERATURE COEFFICIENT	±0.03% /(0℃~75℃)	HUMIDITY= 95.0% RH	
	I/P : 230VAC			±0.0000% /(0℃~75℃)		
6	STORAGE TEMPERATURE TEST		O/P : FULL LOAD			
		1. Thermal shock Temperature : -40℃ ~ +100℃		TEST : OK		
7	THERMAL SHOCK TEST	2. Temperature change rate : 25℃ / MIN				
		3. Dwell time low and high temperature : 30 MIN/EACH				
		4. Total test cycle : 5 CYCLE				
		5. Input/Output condition : STATIC				
		1. Thermal shock Temperature : -35℃ ~ +80℃		TEST : OK		
		2. Temperature change rate : 25℃ / MIN				
		3. Dwell time low and high temperature : 30 MIN/EACH				
		4. Total test cycle : 10 CYCLE				
		5. Input/Output condition :				
		230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec				



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 5G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25℃	TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0℃ LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 75.0℃ LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 75.0℃ LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 75.0℃ LIFE TIME	(1). 158118 HRS (2). 70605.6 HRS (3). 79278 HRS (4). 88914 HRS
10	MTBF	MIL-HDBK-217F 1960K hrs min. MIL-HDBK-217F (25℃)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 75℃	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014