



TEST REPORT: IRM-02-24

2W Single Output Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

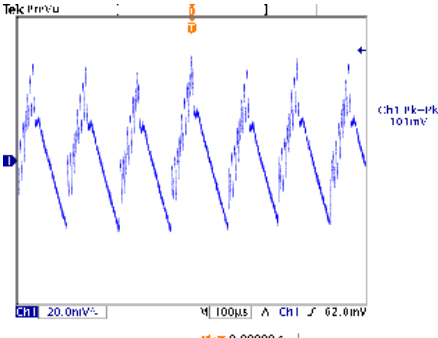
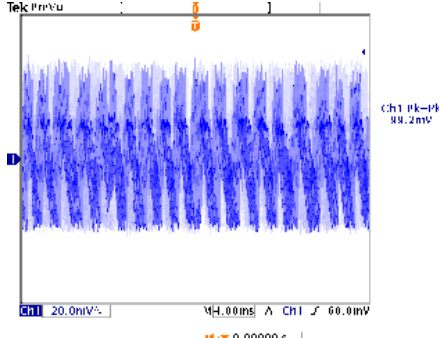
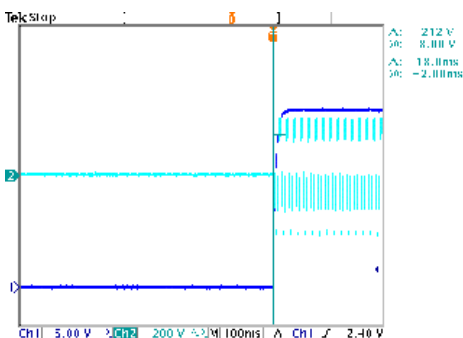
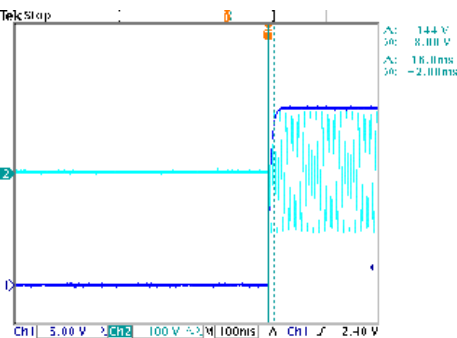
Safety Test

E.M.C. Test

■ RELIABILITY TEST

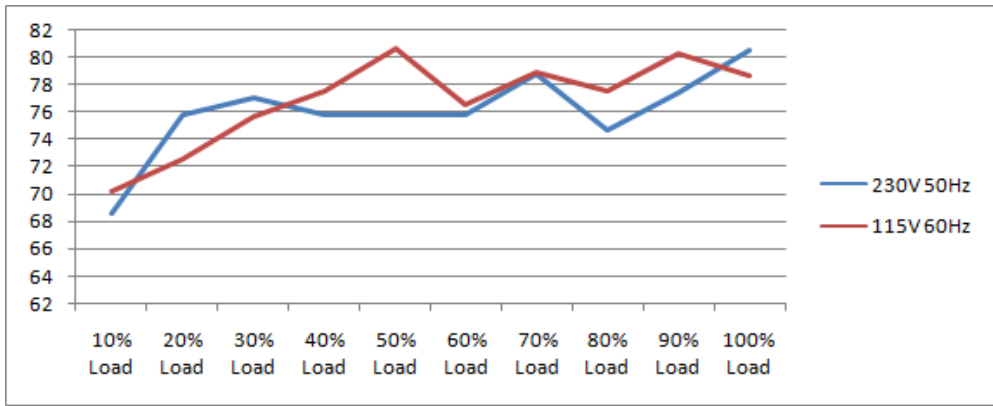
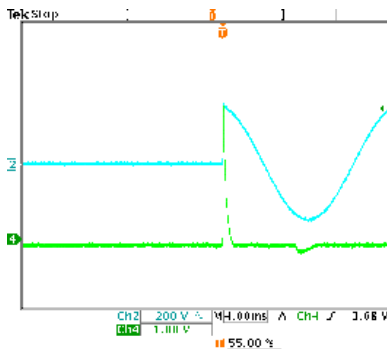
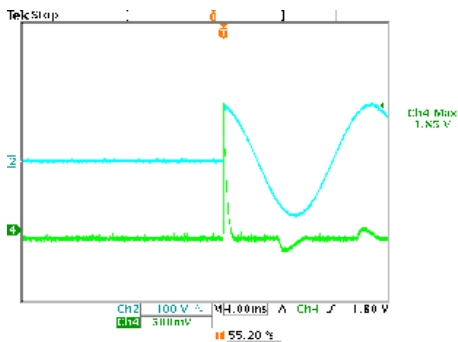
ENVIRONMENT TEST

DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	OUTPUT VOLTAGE RANGE	CH1: 23.760V ~ 24.240V	I/P : 230VAC O/P: MIN LOAD TA : 25°C	CH1: 23.89V	
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.5% ~ -2.5%	I/P : 100VAC / 305VAC O/P: FULL / MINLOAD TA= 25°C	V1: -0.46% ~ -0.50%	
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 100VAC / 305VAC O/P: FULL LOAD TA: 25°C	V1: 0.00% ~ -0.04%	
4	LOAD REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.00% ~ 0.00%	
5	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA: 25°C	TEST< 1.24 %	
6	RIPPLE & NOISE(Max)	V1 : 200 mVp-p	I/P : 230VAC O/P: FULL LOAD TA: 25°C	V1 : 101 mVp-p	
		high frequency :		low frequency :	
					
7	SET UP TIME (MAX.)	230VAC : 600ms 115VAC : 600ms	I/P : 230VAC I/P : 115VAC	230VAC : 18ms 115VAC : 16ms	
		INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
					
	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 13.8ms 115VAC : 13.8ms	

8	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage		
HOLD UP TIME (TYP.)		230VAC : 40ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 116.0ms 115VAC : 26.4ms	
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			
9					
DYNAMIC LOAD		V1 : 2400 mVp-p	I/P : 230VAC O/P: (1) Full/Min load 50% duty/120HZ (2) Full/Min load 50% duty/1KHZ TA : 25°C	V1: (1). 148.0mv (2). 120.0mv unit:mVp-p	
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ			
10					

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 305VAC 120VDC ~ 430VDC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	45.0VAC ~ 305VAC 71VDC ~ 430VDC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 315VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 100VAC ~ 305VAC O/P : FULL-MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.030A / 230VAC 0.045A / 115VAC 0.025A / 277VAC	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 0.01817A / 230VAC I= 0.03200A / 115VAC I= 0.01750A / 277VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P : 277VAC O/P: MIN LOAD TA : 25°C	L-FG: 0.0729 mA N-FG: 0.0729 mA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P: MIN LOAD TA : 25°C	< 0.0355 W
6	EFFICIENCY (TYP.)	77.0%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	80.6 %
				
7	INRUSH CURRENT (TYP.)	20A / 230VAC 10A / 115VAC twidh= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	I= 3.76A / 230VAC I= 1.85A / 115VAC
		INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage		INPUT=115VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage
 				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	> 110%	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	376% 305VAC 325% 230VAC 240% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	25.20V ~ 32.40V	I/P: 305VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	30.20V 305VAC 30.20V 230VAC 30.20V 85VAC Shut off o/p voltage, clamping by zener diode
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 700V 0.4A	I/P : 315VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 315VAC VDS: (1). 634.00V (2). 684.00V (3). 630.00V
2	Input Capacitor	C6 Rated : 5uf 450V	I/P : 315VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1). 442.00V (2). 446.00V (3). 446.00V
3	Control IC	U1 Rated : 9.00V (max) -0.3V (min)	I/P : 315VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 6.58V (2). 6.30V (3). 6.30V (4). 6.54V
5	O/P Diode	D100 Rated : 200V 2.0A	I/P : 315VAC O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1). 148.00V (2). 123.00V (3). 147.00V
6	Clamp Diode	D1 Rated : 1000V 1.0A	I/P : 315VAC (1)Full load continue Ta : 25°C	(1). 594.00V

SAFETY & E.M.C. TEST
SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.000KVAC /min	I/P-O/P: 3.300KVAC /min Ta : 25°C	I/P-O/P: 0.05mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N: 1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL : IRM-02-12			
		1. ROOM AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 18.9℃			
		2. HIGH AMBIENT BURN-IN : 1.0hrs			
		IP: 230VAC O/P: 100% LOAD TA= 73.0℃			
			NO. Position ROOM AMBIENT 18.9℃ HIGH AMBIENT Ta: 73.0℃		
		1 C101	30.1℃	81.4℃	
		2 T1	33.8℃	84.4℃	
		3 C6	31.4℃	81.4℃	
		4 BD1	32.6℃	82.3℃	
		5 R2	31.0℃	80.8℃	
2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230VAC	TEST : OK	
		1 HOUR (MIN)	O/P : 269.46% LOAD		
			Ta : 25℃		
		3	LOW TEMPERATURE TURN ON TEST	I/P : 305VAC / 100VAC	TEST : OK
			O/P : FULL LOAD		
			Ta : -30.0℃		
		4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	I/P : 315VAC	TEST : OK
			AFTER 12 HOURS IN CHAMBER ON CONTROL 75℃	O/P : FULL LOAD	
			NO DAMAGE	Ta : 75℃ HUMIDITY= 95.0% RH	
5	TEMPERATURE COEFFICIENT	±0.03% /(0℃~75℃)	I/P : 230VAC	±0.0000% /(0℃~75℃)	
		O/P : FULL LOAD			
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40℃ ~ +100℃	TEST : OK		
		2. Temperature change rate : 25℃ / MIN			
		3. Dwell time low and high temperature : 30 MIN/EACH			
		4. Total test cycle : 5 CYCLE			
		5. Input/Output condition : STATIC			
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -35℃ ~ +80℃	TEST : OK		
		2. Temperature change rate : 25℃ / MIN			
		3. Dwell time low and high temperature : 30 MIN/EACH			
		4. Total test cycle : 10 CYCLE			
		5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 58sec ; turn off 2sec			



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 5G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 75.0°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 75.0°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 75.0°C LIFE TIME	(1). 158118 HRS (2). 56064 HRS (3). 62984.4 HRS (4). 70605.6 HRS
10	MTBF	MIL-HDBK-217F 1960K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 75°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014