



TEST REPORT: MPM-10-5

10W Reliable Green Medical Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

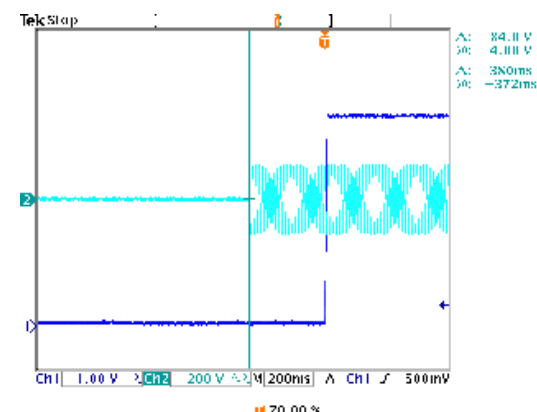
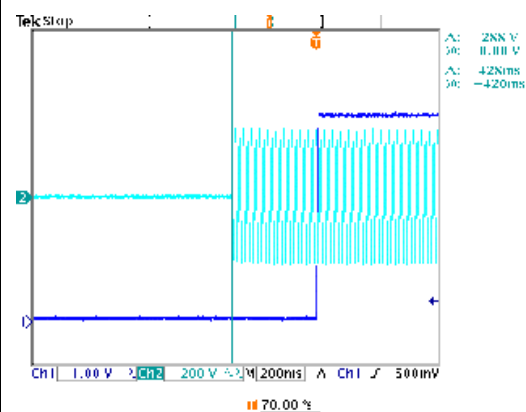
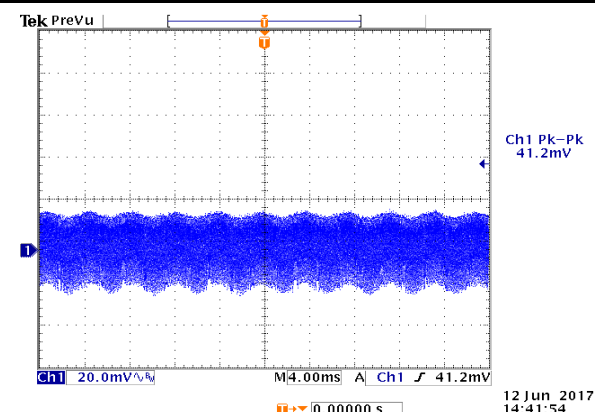
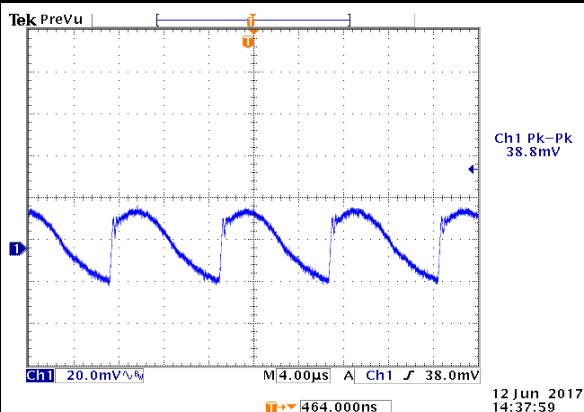
Safety Test
E.M.C. Test

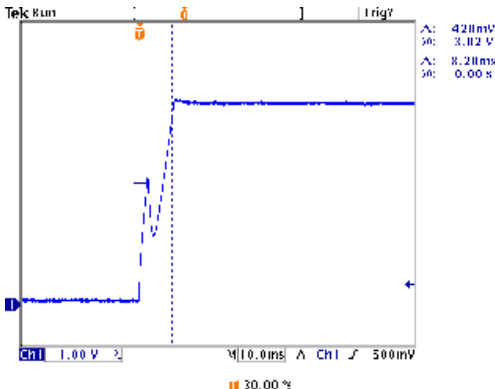
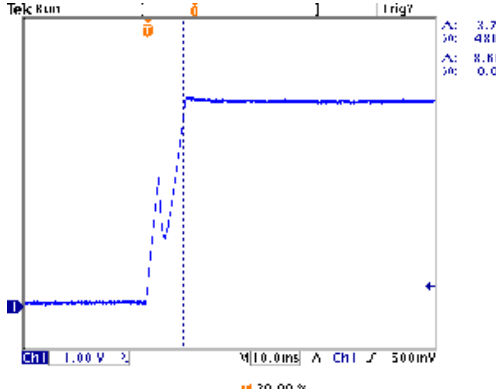
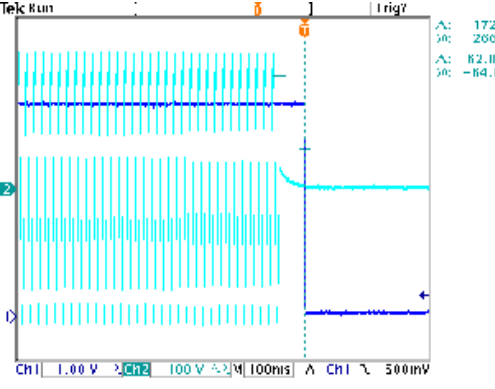
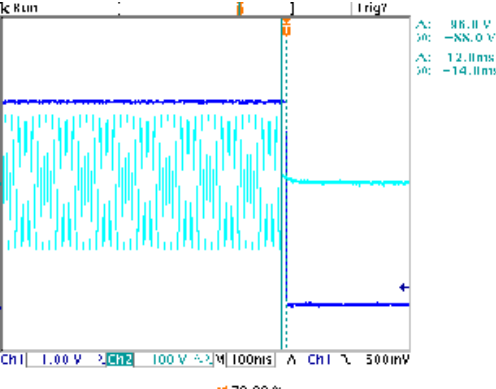
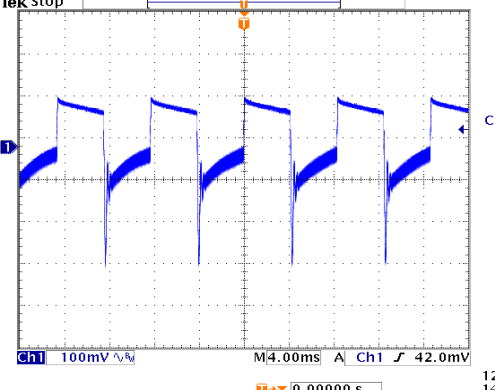
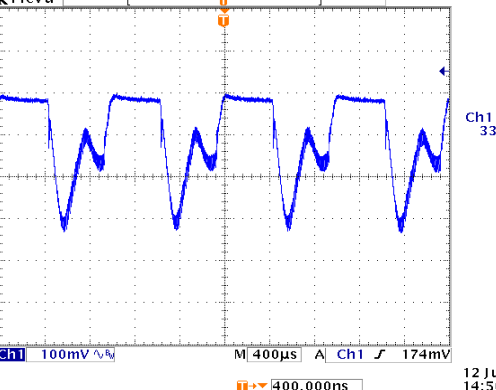
■ RELIABILITY TEST

ENVIRONMENT TEST

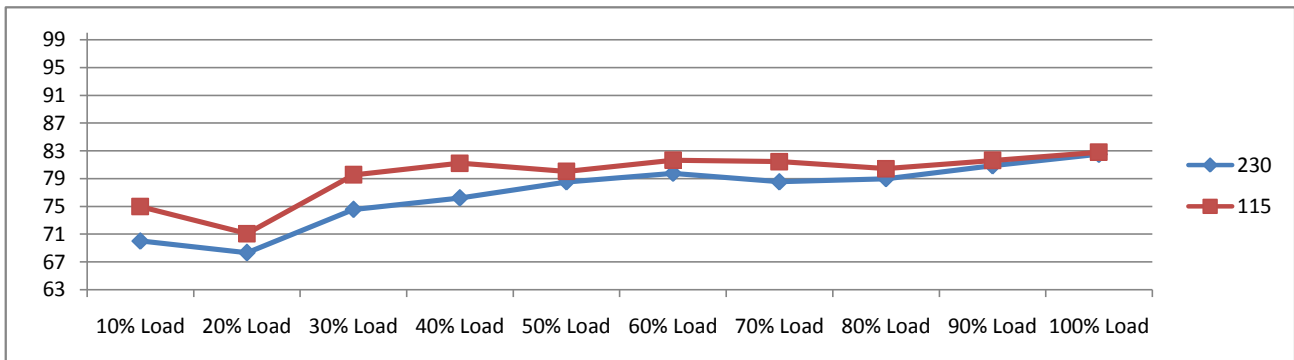
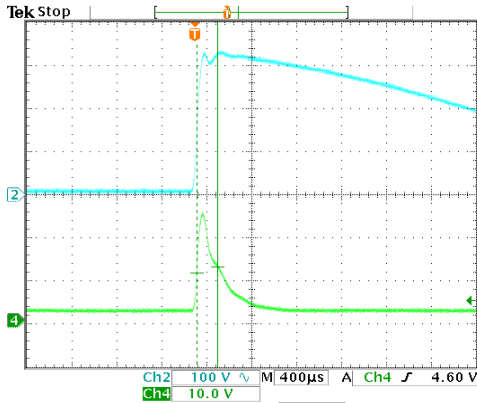
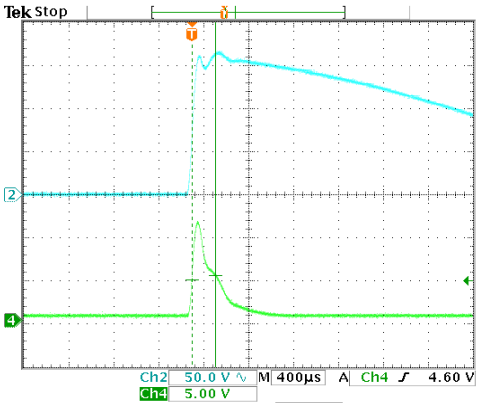
DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.5% ~ -2.5%	I/P : 100VAC / 264VAC O/P: FULL / MINLOAD TA: 25°C	V1: 0.24% ~ -0.12%
2	LINE REGULATION (MAX.)	V1 : 0.3% ~ -0.3%	I/P : 100VAC / 264VAC O/P: FULL LOAD TA: 25°C	V1: 0.12% ~ 0.00%
3	LOAD REGULATION(MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.12% ~ -0.12%
4	OVER/UNDERSHOOT TEST	< ±10%	I/P : 230VAC O/P: FULL LOAD TA: 25°C	TEST< 4.1 %
5	RIPPLE & NOISE(Max)	V1 : 100 mVp-p	I/P : 230VAC O/P: FULL LOAD TA: 25°C	V1 : 41.2 mVp-p
			high frequency: low frequency:	
6	SET UP TIME (MAX.)	230VAC : 1000ms 115VAC : 1000ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 428ms 115VAC : 380ms
		INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	



7	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 8.2ms 115VAC : 8.6ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
 				
8	HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 8ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 62.0ms 115VAC : 12.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
 				
9	DYNAMIC LOAD	V1 : 1000 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25°C	(1). 406mv (2). 332mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ		FULL /MIN% LOAD 50%DUTY / 1KHZ	
 				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	68.0VAC ~ 264VAC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 440HZ NO DAMAGE	I/P : 100VAC ~ 264VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.2A / 230VAC 0.3A / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.084A / 230VAC I= 0.16A / 115VAC
4	LEAKAGE CURRENT	< 0.08mA	I/P : 264VAC O/P : MIN LOAD TA : 25°C	0.0274 mA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.046 W
6	EFFICIENCY (TYP.)	81.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	82.5 %
				
7	INRUSH CURRENT (TYP.)	45A / 230VAC 25A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 25.2A / 230VAC I= 11.5A / 115VAC T50= 184.0us / 230VAC
			INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A) CH2 : AC Input Voltage CH4 : Input current (1V=1A)	
7				



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110% ~ 180%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	147.50% 264VAC 144.50% 230VAC 133.40% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	5.80V ~ 6.80V	Ta: 25°C	6.30V
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down Re- power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	U1 Rated : 800V 2.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 506.00V (2). 466.00V (3). 502.00V
2	O/P Diode	D100 Rated : 45V 10.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue	D100 VDS : (1). 38.40V (2). 43.80V (3). 37.40V
3	Input Capacitor	C5 Rated : 10uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta : 25°C	(1). 392.00V (2). 390.00V (3). 394.00V (4). 390.00V
4	Control IC	U1 Rated : 27V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 17.80V (2). 17.00V (3). 19.20V (4). 16.90V
5	Clamp Diode	D2 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load (2)Full load continue Ta : 25°C	(1). 488.00V (2). 480.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.250KVAC /min Ta : 25°C	I/P-O/P: 0.06mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C /70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS



2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 MEDICAL AIR: 8KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 MEDICAL L-N:1KV;L/N-PE: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

■ RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT			
1	TEMPERATURE RISE TEST	MODEL : MPM-10-5					
		1. ROOM AMBIENT BURN-IN : 1.0hrs					
		IP: 230VAC O/P: 100% LOAD TA= 21.1°C					
		2. HIGH AMBIENT BURN-IN : 1.0hrs					
		IP: 230VAC O/P: 100% LOAD TA= 61.0°C					
		NO.	Position	ROOM AMBIENT 21.1°C	HIGH AMBIENT Ta: 61.0°C		
		1	C4	47.8°C	84.3°C		
		2	C5	52.3°C	88.3°C		
		3	C37	47.6°C	83.6°C		
		4	R1	48.1°C	84.5°C		
		5	U1	56.9°C	93.5°C		
		6	T1	57.2°C	92.9°C		
		7	C105	49.1°C	84.7°C		
2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230VAC	TEST : OK			
		1 HOUR (MIN)	O/P : 132.00% LOAD				
			Ta : 25°C				
		3	LOW TEMPERATURE TURN ON TEST		NO DAMAGE	I/P : 264VAC / 100VAC	TEST : OK
					1 HOUR (MIN)	O/P : FULL LOAD	
						Ta : -35.0°C	
					4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	
IN CHAMBER ON	O/P : FULL LOAD						
CONTROL 60°C	Ta : 60°C						
5	TEMPERATURE COEFFICIENT	NO DAMAGE	HUMIDITY= 95.0% RH	±0.0000% /(0°C~60°C)			
		±0.03% /(0°C~60°C)	I/P : 230VAC				
6	STORAGE TEMPERATURE TEST		O/P : FULL LOAD	TEST : OK			
		1. Thermal shock Temperature : -50°C ~ +125°C					
7	THERMAL SHOCK TEST	2. Temperature change rate : 25°C / MIN		TEST : OK			
		3. Dwell time low and high temperature : 30 MIN/EACH					
8	VIBRATION TEST	4. Total test cycle : 100 CYCLE		TEST : OK			
		5. Input/Output condition : STATIC					
9		1. Thermal shock Temperature : -35°C ~ +65°C		TEST : OK			
		2. Temperature change rate : 25°C / MIN					
10		3. Dwell time low and high temperature : 30 MIN/EACH		TEST : OK			
		4. Total test cycle : 16 CYCLE					
11		5. Input/Output condition :		TEST : OK			
		230VAC Full Load AC ON/OFF test turn on 3sec ; turn off 1sec @ 15CYCLE					
12		230VAC Full Load AC ON turn on continue @ 1CYCLE		TEST : OK			
13		1 Carton & 1 Set		TEST : OK			
		(1) Waveform : Sine Wave					
14		(2) Frequency : 10~500Hz		TEST : OK			
		(4) Acceleration : 5G					
15		(5) Test Time : 60 min in each axis (X.Y.Z)		TEST : OK			
		(6) Ta : 25°C					



9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT					
		(1) I/P : 230VAC	O/P : FULL LOAD	Ta= 25.0℃	LIFE TIME	(1).	429356.8 HRS
		(2) I/P : 230VAC	O/P : FULL LOAD	Ta= 60.0℃	LIFE TIME	(2).	51158.4 HRS
		(3) I/P : 230VAC	O/P : 75% LOAD	Ta= 60.0℃	LIFE TIME	(3).	54838.9 HRS
		(4) I/P : 230VAC	O/P : 50% LOAD	Ta= 60.0℃	LIFE TIME	(4).	87675.1 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1756.2K hrs min. MIL-HDBK-217F (25℃)					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 60℃					

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ