



TEST REPORT: MPM-20-3.3

20W High Reliable Green Medical Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST



ENVIRONMENT TEST

DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 80VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.61% ~ 0.00%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 100VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ 0.00%
4	LOAD REGULATION(MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.00% ~ -0.30%
5	OVER/UNDERSHOOT TEST	< ±15%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 7.4 %
	RIPPLE & NOISE(Max)	V1 : 150 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 101 mVp-p

high frequency:

low frequency:

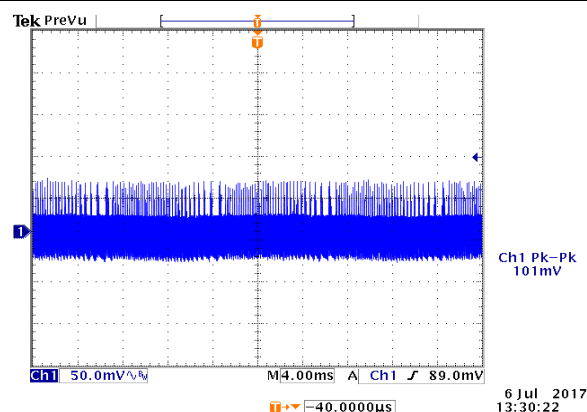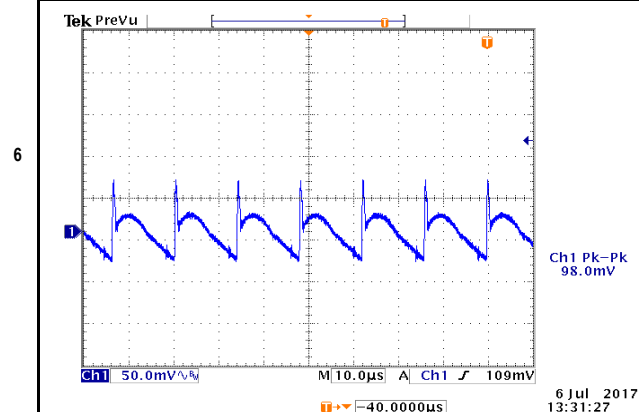



SET UP TIME (MAX.)	230VAC : 1500ms 115VAC : 1500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 200ms 115VAC : 176ms
--------------------	------------------------------------	---	----------------------------------

INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

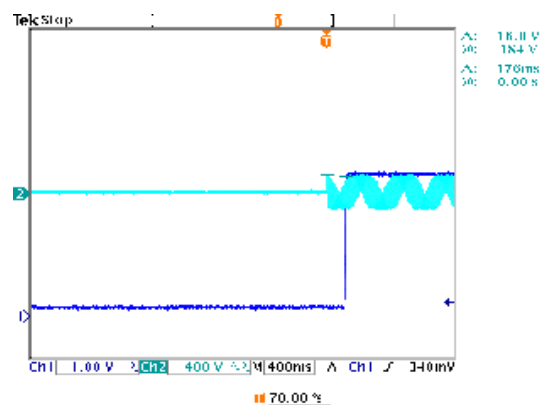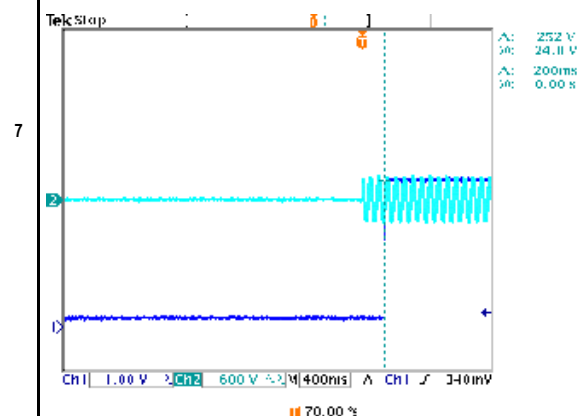

RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 7.6ms 115VAC : 11.2ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage	
HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 10ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 88.0ms 115VAC : 18.0ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	
DYNAMIC LOAD	V1 : 990 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA: 25°C	V1: (1). 550mv (2). 440mv unit:mVp-p
FULL / MIN LOAD 50%DUTY / 120HZ		FULL / MIN% LOAD 50%DUTY / 1KHZ	



20W High Reliable Green Medical Encapsulated Type MPM-20 series

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	129.55% 264VAC 124.44% 230VAC 118.80% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	3.80V ~ 5.00V	I/P: 80VAC/230VAC/264VAC O/P: MIN LOAD Ta: 25°C	4.40V 264VAC 4.40V 230VAC 4.40V 80VAC Shut off o/p voltage
3	OVER TEMPERATURE PROTECTION	Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE OK Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	U1 Rated : 800V 11.5A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 470.00V (2). 450.00V (3). 46.00V
2	O/P MOSFET	Q100 Rated : 60V 84.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	Q100 VDS : (1). 24.20V (2). 23.20V (3). 25.00V
3	Input Capacitor	C5 Rated : 33uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta : 25°C	(1). 352.00V (2). 356.00V (3). 352.00V (4). 346.00V
4	Control IC	U1 Rated : 27V (max) -0.3 (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	U1 (1). 22.60V 12.10V (2). 15.80V 5.90V (3). 22.80V 12.60V (4). 16.00V 7.70V
9	Clamp Diode	D1 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load (2)Full load continue Ta : 25°C	(1). 408.00V (2). 414.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta : 25°C	I/P-O/P: 0.89mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999.0MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS



20W High Reliable Green Medical Encapsulated Type MPM-20 series

2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 MEDICAL AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	EN61000-4-5 MEDICAL L-N:1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																	
1	TEMPERATURE RISE TEST	MODEL : MPM-20-5																																																			
		1. ROOM AMBIENT BURN-IN : 1.0hrs																																																			
		IP: 230VAC O/P: 100% LOAD TA= 18.9℃																																																			
		2. HIGH AMBIENT BURN-IN : 1.0hrs																																																			
		IP: 230VAC O/P: 100% LOAD TA= 60.3℃																																																			
		<table><tr><td>NO.</td><td>Positio</td><td>ROOM AMBIENT 18.9℃</td><td>HIGH AMBIENT Ta: 60.3℃</td></tr><tr><td>1</td><td>LF1</td><td>61.1℃</td><td>93.8℃</td></tr><tr><td>2</td><td>C6</td><td>65.9℃</td><td>97.3℃</td></tr><tr><td>3</td><td>C5</td><td>74.9℃</td><td>105.3℃</td></tr><tr><td>4</td><td>U1</td><td>82.7℃</td><td>111.7℃</td></tr><tr><td>5</td><td>T1</td><td>70.7℃</td><td>102.3℃</td></tr><tr><td>6</td><td>C105</td><td>58.1℃</td><td>91.4℃</td></tr><tr><td>7</td><td>Q100</td><td>87.8℃</td><td>119.1℃</td></tr><tr><td>8</td><td>BD1</td><td>71.2℃</td><td>103.5℃</td></tr><tr><td>9</td><td>C1</td><td>62.0℃</td><td>93.5℃</td></tr><tr><td>10</td><td>L100</td><td>66.0℃</td><td>99.5℃</td></tr><tr><td>60</td><td>TA</td><td>18.9℃</td><td>60.3℃</td></tr></table>			NO.	Positio	ROOM AMBIENT 18.9℃	HIGH AMBIENT Ta: 60.3℃	1	LF1	61.1℃	93.8℃	2	C6	65.9℃	97.3℃	3	C5	74.9℃	105.3℃	4	U1	82.7℃	111.7℃	5	T1	70.7℃	102.3℃	6	C105	58.1℃	91.4℃	7	Q100	87.8℃	119.1℃	8	BD1	71.2℃	103.5℃	9	C1	62.0℃	93.5℃	10	L100	66.0℃	99.5℃	60	TA	18.9℃	60.3℃	
		NO.	Positio	ROOM AMBIENT 18.9℃	HIGH AMBIENT Ta: 60.3℃																																																
		1	LF1	61.1℃	93.8℃																																																
		2	C6	65.9℃	97.3℃																																																
		3	C5	74.9℃	105.3℃																																																
		4	U1	82.7℃	111.7℃																																																
		5	T1	70.7℃	102.3℃																																																
		6	C105	58.1℃	91.4℃																																																
7	Q100	87.8℃	119.1℃																																																		
8	BD1	71.2℃	103.5℃																																																		
9	C1	62.0℃	93.5℃																																																		
10	L100	66.0℃	99.5℃																																																		
60	TA	18.9℃	60.3℃																																																		
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 131.00% LOAD Ta : 25℃	TEST : OK																																																	
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 100VAC O/P : FULL LOAD Ta : -35.0℃	TEST : OK																																																	
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 55℃ NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 55℃ HUMIDITY= 95.0% RH	TEST : OK																																																	
5	TEMPERATURE COEFFICIENT	±0.03% /(0℃~55℃)	I/P : 230VAC O/P : FULL LOAD	±0.0081% /(0℃~55℃)																																																	
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -50℃ ~ +125℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 100 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																																	
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -40℃ ~ +60℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 3sec ; turn off 1sec @ 15CYCLE 230VAC Full Load AC ON turn on continue @ 1CYCLE		TEST : OK																																																	
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25℃		TEST : OK																																																	



20W High Reliable Green Medical Encapsulated Type MPM-20 series

9	CAPACITOR LIFE CYCLE	MPM-20-5	:SUPPOSE	C105	IS THE MOST CRITICAL COMPONENT		
		(1) I/P :	230VAC	O/P : FULL LOAD	Ta=	25.0℃	LIFE TIME
		(2) I/P :	230VAC	O/P : FULL LOAD	Ta=	55.0℃	LIFE TIME
		(3) I/P :	230VAC	O/P : 75% LOAD	Ta=	55.0℃	LIFE TIME
		(4) I/P :	230VAC	O/P : 50% LOAD	Ta=	55.0℃	LIFE TIME
10	MTBF	Conducted by Parts Stress Analysis Prediction 1210K hrs min. MIL-HDBK-217F (25℃)					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 55℃					

TEST RESULT	TESTER	REVIEW	APPROVAL
-------------	--------	--------	----------