



TEST REPORT: MPM-30-12

30W High Reliable Green Medical Encapsulated Type

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Control Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test

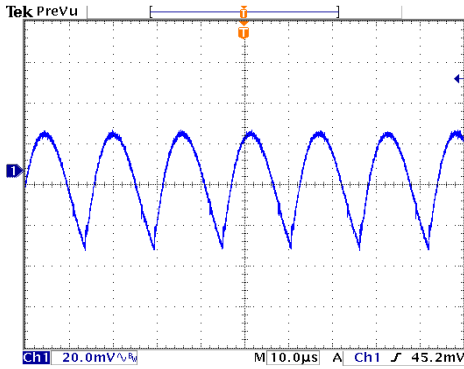
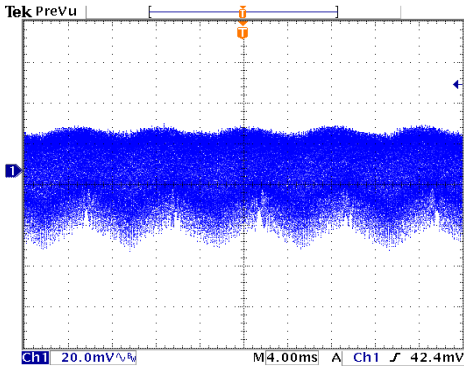
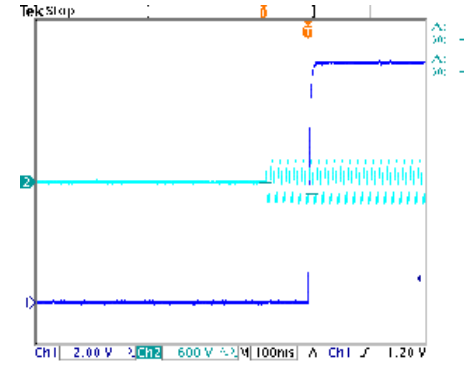
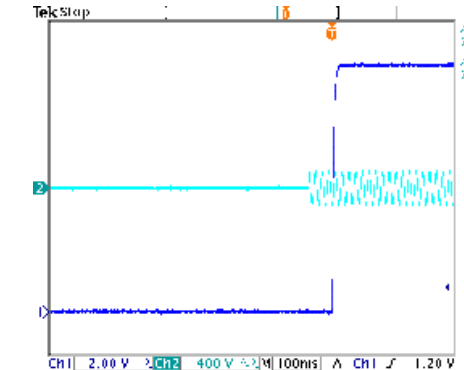
■ RELIABILITY TEST

- ENVIRONMENT TEST



30W High Reliable Green Medical Encapsulated Type MPM-30 series

DESIGN VERIFY TEST OUTPUT FUNCTION

OUTPUT FUNCTION				
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 80VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.08% ~ -0.17%
2	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 80VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ 0.00%
3	LOAD REGULATION(MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.08% ~ 0.00%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 4.3 %
5	RIPPLE & NOISE(Max)	V1 : 120 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 62.8 mVp-p
			high frequency: low frequency:	
 				
6	SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 120ms 115VAC : 68ms
		INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage
 				

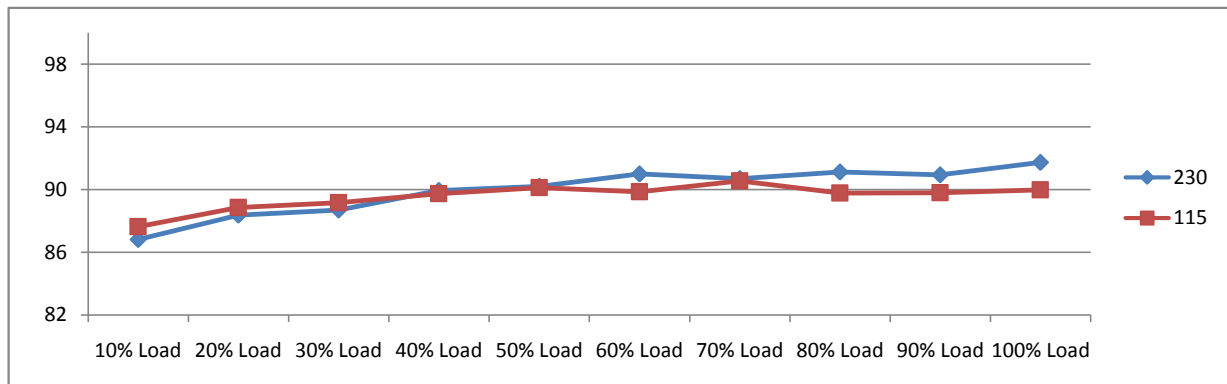
7	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 7.4ms 115VAC : 7.4ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage			
8	HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 68.0ms 115VAC : 18.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			
9	DYNAMIC LOAD	V1 : 1200 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50% duty/120HZ (2)Full/Min load 50% duty/1KHZ TA : 25°C	V1: (1). 356mv (2). 257mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ FULL /MIN% LOAD 50%DUTY / 1KHZ			



30W High Reliable Green Medical Encapsulated Type MPM-30 series

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	72.0VAC ~ 264VAC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 80VAC ~ 264VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.50A / 230VAC 0.75A / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.24A / 230VAC I= 0.44A / 115VAC
4	LEAKAGE CURRENT	< 80.00μA	I/P : 264VAC O/P : MIN LOAD TA : 25°C	Touch current 49.7 μA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.0741 W
6	EFFICIENCY (TYP.)	90.0%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	92.5 %



INRUSH CURRENT (TYP.)	45A / 230VAC 25A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 40.6A / 230VAC I= 21.8A / 115VAC T50= 384.0us / 230VAC
	INPUT=230VAC/50HZ @ FULL LOAD		
CH2 : AC Input Voltage CH4 : Input current		INPUT=115VAC/50HZ @ FULL LOAD	
CH2 : AC Input Voltage CH4 : Input current		CH2 : AC Input Voltage CH4 : Input current	
Tek PreVu Ch4 Max 40.6 A Ch2 100 V V M 400µs A Ch4 9.00 A Ch2 10.0 A 49.80 %		Tek Stop Ch4 Max 21.8 A Ch2 50.0 V V M 400µs A Ch4 3.60 A Ch2 5.00 A 49.80 %	



30W High Reliable Green Medical Encapsulated Type MPM-30 series

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115% ~ 165%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	160.00% 264VAC 156.00% 230VAC 154.00% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	12.60V ~ 16.20V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD Ta: 25°C	14.50V 264VAC 14.50V 230VAC 14.40V 80VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 7.5A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 442.00V (2). 448.00V (3). 438.00V
2	O/P MOSFET	Q100 Rated : 100V 80.0A Rated :	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	Q100 VDS : (1). 89.00V (2). 84.00V (3). 86.00V
3	Input Capacitor	C5 Rated : 56uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta : 25°C	(1). 360.00V (2). 360.00V (3). 356.00V (4). 344.00V
4	Control IC	U1 Rated : 28V (max) -0.3 (min) U100 Rated : 38V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25°C	U1 U100 (1). 19.60V 12.1 (2). 12.10V 0.9 (3). 19.80V 12.1 (4). 22.50V 14.4 (5). 19.00V 12.2
5	Clamp Diode	D5 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load (2)Full load continue Ta : 25°C	(1). 418.00V (2). 420.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.250KVAC /min Ta : 25°C	I/P-O/P: 1.18mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999.0MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS



30W High Reliable Green Medical Encapsulated Type MPM-30 series

2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	EN61000-4-5 MEDICAL LINE-LINE:1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : MPM-30-5		
		1. ROOM AMBIENT BURN-IN : 1.0hrs		
		IP: 230VAC O/P: 100% LOAD TA= 29.2℃		
		2. HIGH AMBIENT BURN-IN : 1.0hrs		
		IP: 230VAC O/P: 100% LOAD TA= 61.3℃		
		NO. Position ROOM AMBIENT 29.2℃ HIGH AMBIENT Ta: 61.3℃		
		1 LF1 52.4℃ 81.9℃		
		2 LF2 53.1℃ 81.9℃		
		3 C5 57.2℃ 87.5℃		
		4 C40 61.0℃ 91.5℃		
		5 BD1 63.1℃ 92.6℃		
		6 R40 69.8℃ 99.2℃		
		7 T1 66.4℃ 97.9℃		
		8 Q100 61.7℃ 93.1℃		
9 C105 65.0℃ 96.5℃				
10 L100 58.2℃ 89.1℃				
11 Q1 63.4℃ 93.8℃				
12 U1 61.1℃ 90.7℃				
60 TA 29.2℃ 61.3℃				
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230VAC O/P : 159.0% LOAD Ta : 25℃	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 264VAC / 100VAC O/P : FULL LOAD Ta : -40.0℃	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃ NO DAMAGE	I/P : 272VAC O/P : FULL LOAD Ta : 60℃ HUMIDITY= 95.0% RH	TEST : OK
5	TEMPERATURE COEFFICIENT	±0.03% /℃(0~60℃)	I/P : 230VAC O/P : FULL LOAD	±0.0062% /℃(0~60℃)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -50℃~ +125℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 100 CYCLE 5. Input/Output condition : STATIC		TEST : OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45℃ ~ 65℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 230VAC Full Load AC ON/OFF test turn on 3sec ; turn off 1sec @ 15CYCLE 230VAC Full Load AC ON turn on continue @ 1CYCLE		TEST : OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (Blank) /5G (ST) (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25℃		TEST : OK



30W High Reliable Green Medical Encapsulated Type MPM-30 series

9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT					
		(1) I/P : 230VAC	O/P : FULL LOAD	Ta= 25℃	LIFE TIME	(1).	215470.2 HRS
		(2) I/P : 230VAC	O/P : FULL LOAD	Ta= 60℃	LIFE TIME	(2).	30493.9 HRS
		(3) I/P : 230VAC	O/P : 75% LOAD	Ta= 60℃	LIFE TIME	(3).	34062.7 HRS
		(4) I/P : 230VAC	O/P : 50% LOAD	Ta= 60℃	LIFE TIME	(4).	54721 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 779K hrs min. MIL-HDBK-217F (25℃)					
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): 30000HRS @ TA 60℃					

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ