



Test Report: NDR-240-24

240W Single Output Industrial DIN RAIL

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

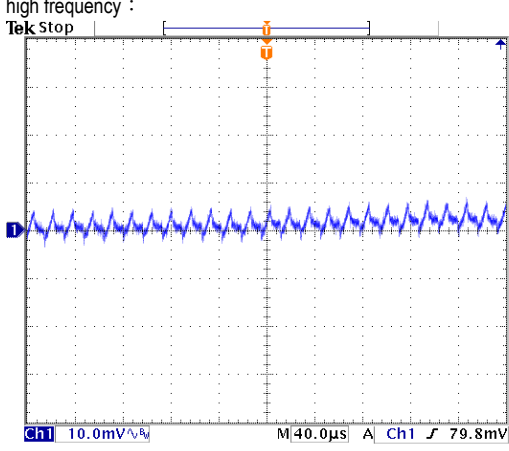
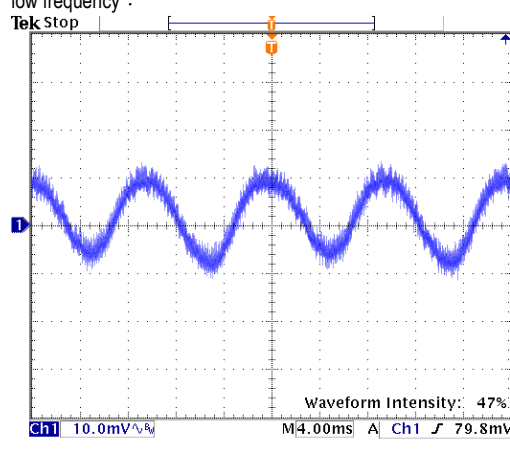
E.M.C. Test

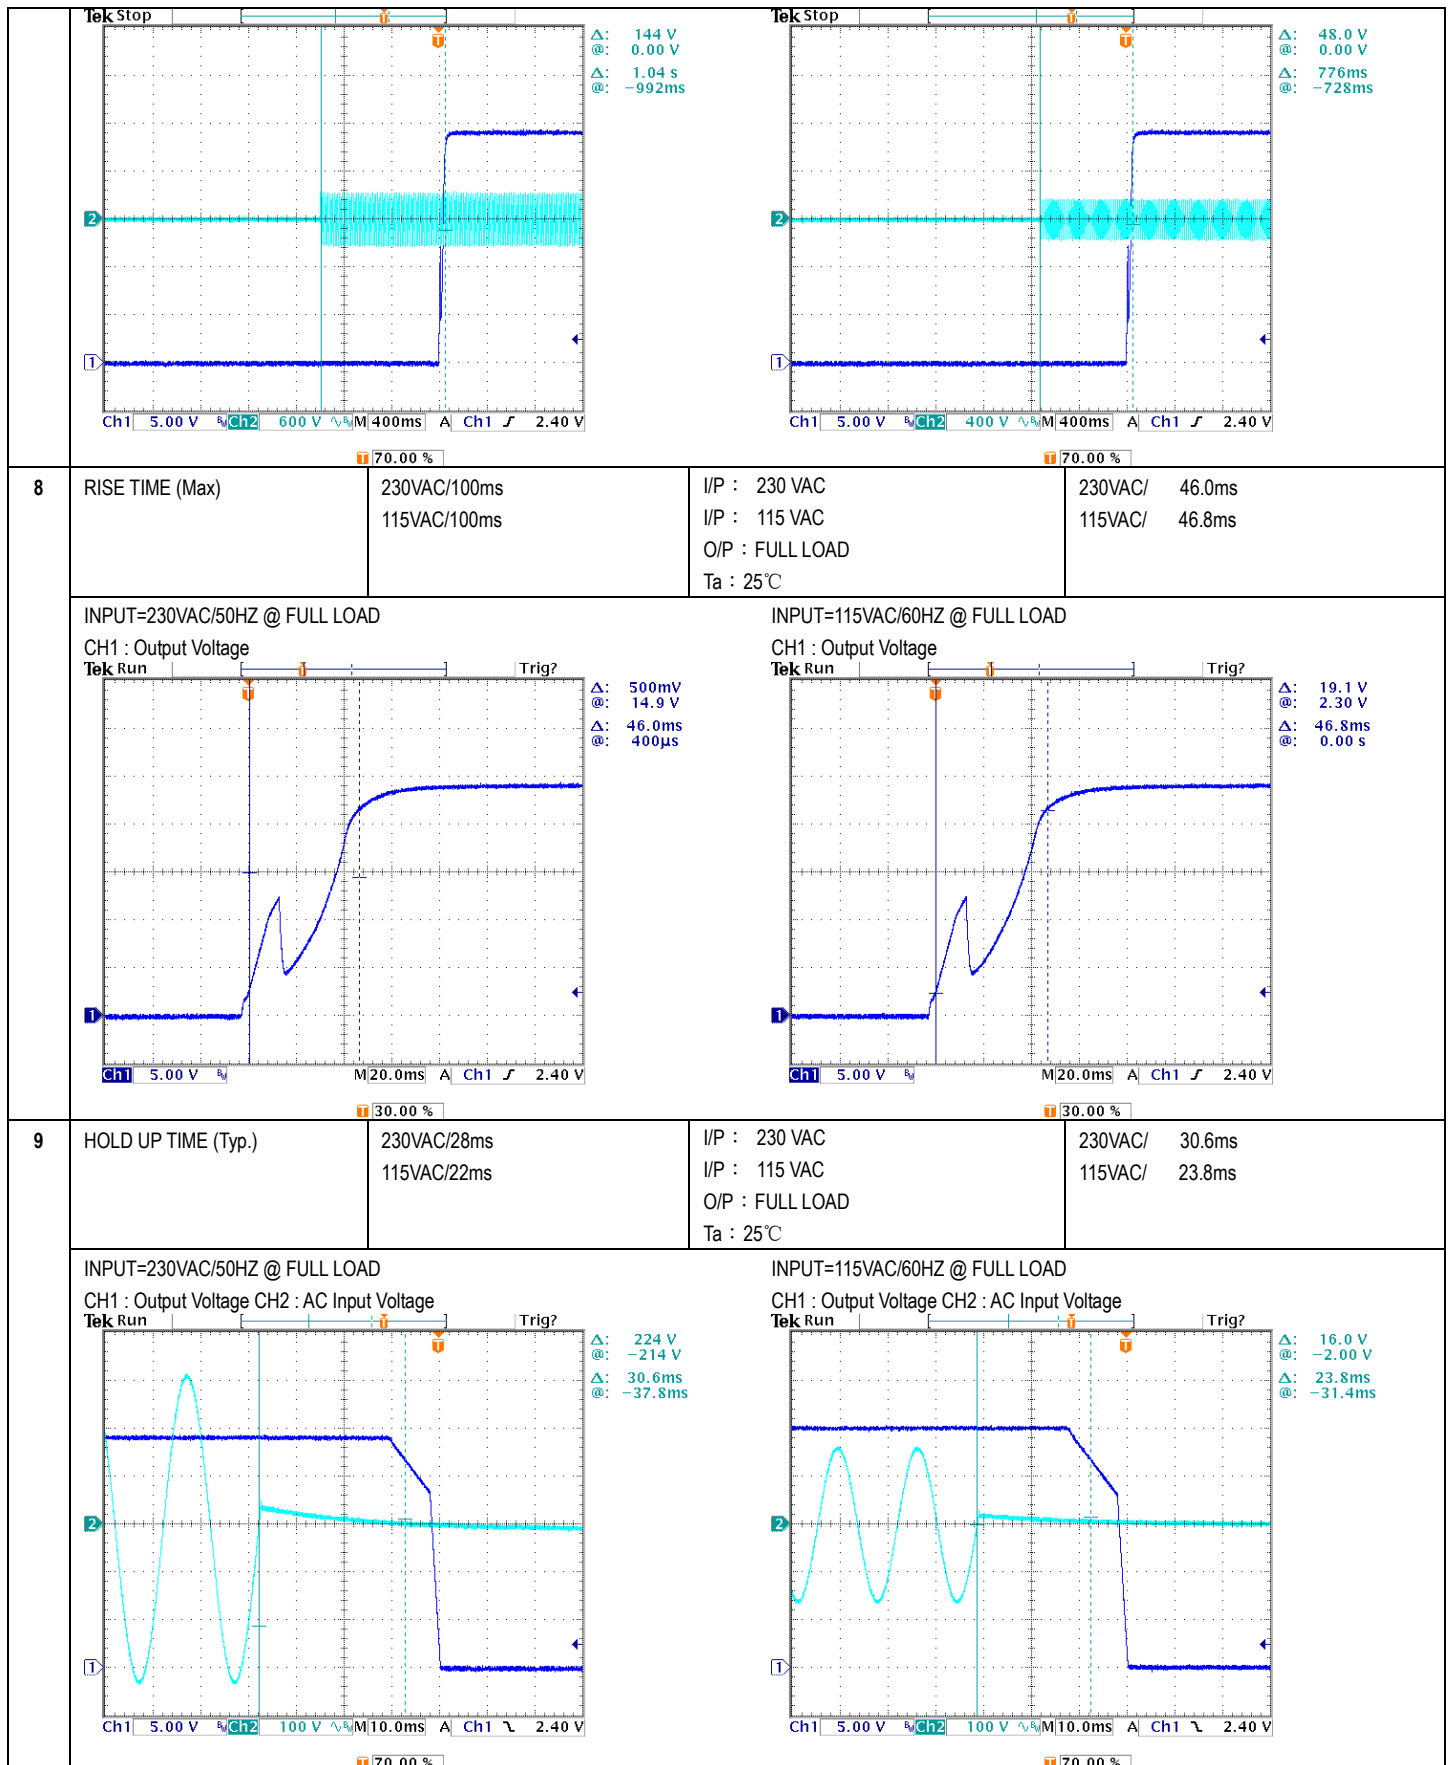
■ RELIABILITY TEST

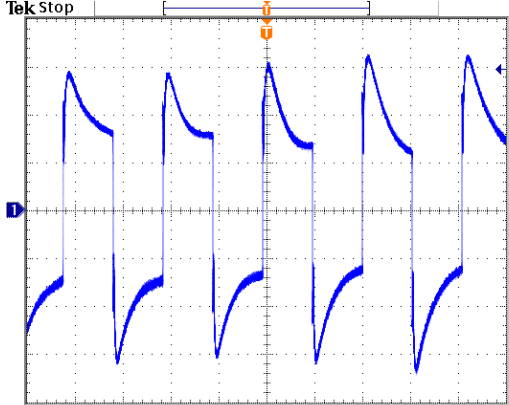
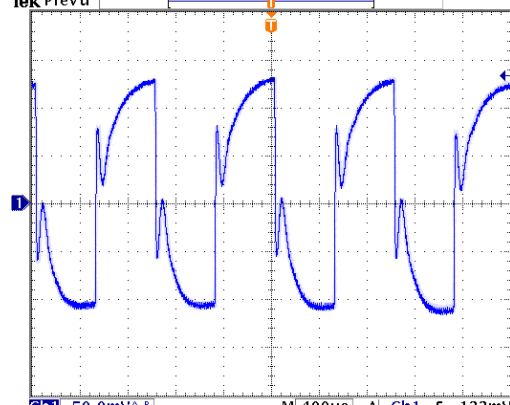
ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

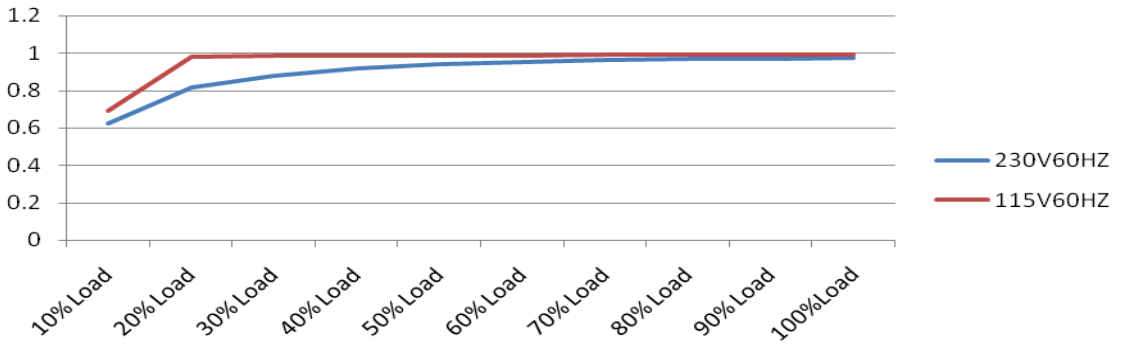
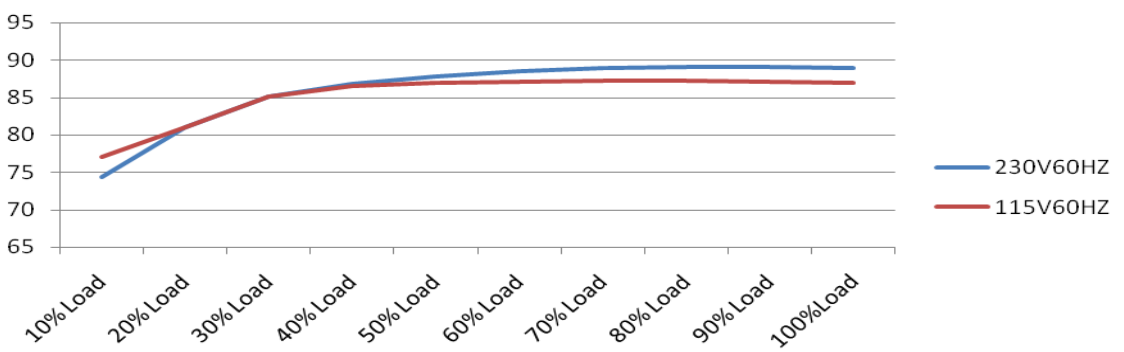
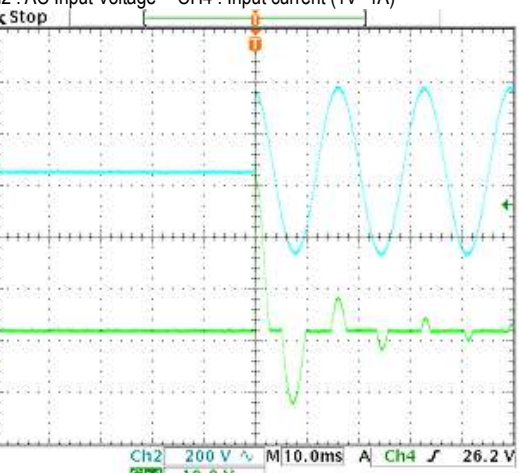
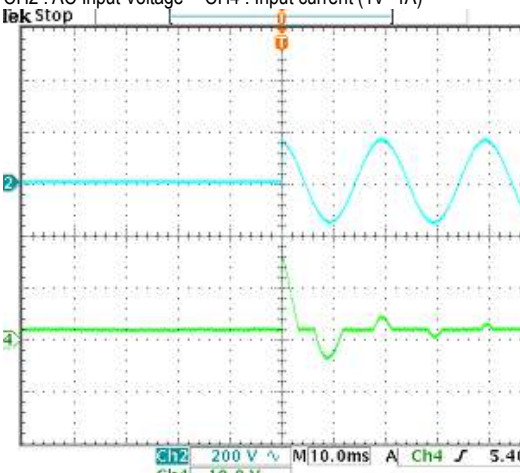
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 24V~ 28V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25℃	23.35V~28.56V/230VAC 23.34V~28.55V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1%~ -1%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25℃	V1: -0.124%~ 0.166%
3	LINE REGULATION (Max)	V1: -0.5%~ -0.5%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25℃	V1: 0%~ 0.04%
4	LOAD REGULATION(Max)	V1: -1%~ -1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: -0.124%~ 0.166%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25℃	< ±5%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25℃	V1: 24.6mVp-p
high frequency :  Ch1 Pk-Pk 10.4mV low frequency :  Ch1 Pk-Pk 24.6mV				
7	SET UP TIME(Max)	230VAC/1500ms 115VAC/3000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25℃	230VAC/ 1040.0ms 115VAC/ 776.0ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	



10	DYNAMIC LOAD	V1: 2400mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	331mVp-p 248mVp-p
FULL /50% LOAD 50%DUTY / 120HZ  Ch1 Pk-Pk 331mV FULL /50% LOAD 50%DUTY / 1KHZ  Ch1 Pk-Pk 248mV				
11	TRANSIENT RECOVERY TIME	V1: 2400mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	462mVp-p

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	68V~264V
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 1.3A 115V/ 2.5A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.196A/ 230VAC I =2.424A/ 115VAC
4	LEAKAGE CURRENT	<1 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.83 mA N-FG : 0.83 mA
6	POWER FACTOR (Typ.)	0.95/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.975/230VAC PF=0.992/115VAC
	P.F vs LOAD			

				
7	EFFICIENCY(Typ.)	88%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	88.89%
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/35A 115V/20A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I=34.8A/ 230VAC I=18.6A/ 115VAC
	INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)  INPUT=115VAC/ 60HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A) 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 130 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P:TESTING Ta:25℃	118.7%/ 264VAC 118.7%/ 230VAC 118.7%/100VAC PROTECTION TYPE : constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	29V~33V	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P:MIN LOAD Ta:25℃	31.95V/ 264VAC 32.0V/ 230VAC 31.8V/ 90VAC PROTECTION TYPE : shut down o/p voltage,re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type : :shut down o/p voltage,recovers automaticallyafter temperature goes down	I/P: 264VAC I/P: 90VAC O/P:FULL LOAD	O.T.P.Active Protection type :shut down o/p voltage,recovers automaticallyafter temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25℃	NO DAMAGE PROTECTION TYPE : constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

[illegible]

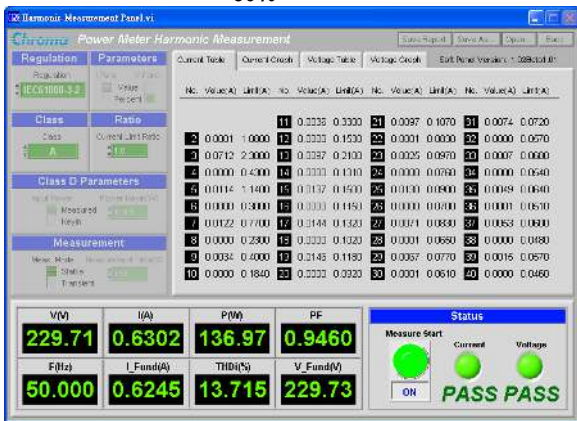
			(2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (6)NO LOAD Ta:25°C	(6)12.8V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 20 A/ 600 V VGS ± 30V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5)0%→400% Load. VGS: (1)OLP (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (6)NO LOAD I/P:Low-Line -3V = 97V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5)0%→400% Load. VGS: (1)OLP (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (5) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (6)NO LOAD Ta:25°C	VDS: (1) 420V (2) 400V (3) 424V (4) 426V (5) 404V VGS: (1)13.3V (2)13.2V (3)13.3V (4)13.3V (5)13.4V (6)13.0V VDS: (1) 450V (2) 402V (3) 442V (4) 412V (5) 388V VGS: (1)12.1V (2)12.2V (3)13.9V (4)13.8V (5)13.8V (6)13.6V
3	P.F.C DIODE	D10 Rated : 8A/ 600V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/	(1) 402V (2) 396V (3) 402V (4) 402V

			Min. Load 50%Duty/120Hz I/P:Low-Line -3V = 97V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25°C	(1) 378V (2) 378V (3) 376V (4) 376V
4	Diode Peak Voltage	D101 Rated : 20A/ 120V D102 Rated : 20A/ 120 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5)0%→400% Load. Ta:25°C	D101: VDS: (1)72.8V (2)74.0V (3)94.8V (4)94.4V (5)111V D102: VDS: (1)101V (2)105V (3)101V (4)102V (5)105V
5	Input Capacitor Voltage	C5 Rated: : 180 μ / 400 V 105 °C	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)392V (2)386V (3)398V
6	Control IC Voltage Test	PWM IC U1 Rated : 27 V 12V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR 下限.LOW LINE Ta:25°C	(1) 15.9V (2) 15.8V (3) 15.8V (4) 15.6V (5) 15.1V
7	Clamp Diode Peak Voltage	D22 Rated : 1KV / 1 A	I/P : High-Line +3V = 267 V AC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1)816V (2)792V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG: 2KVAC/min O/P-FG: 0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 0.6 KVAC/min Ta: 25°C	I/P-O/P: 3.25mA I/P-FG: 6.42mA O/P-FG: 3.27mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC > 100MΩ I/P-FG: 500VDC > 100MΩ O/P-FG: 500VDC > 100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta: 25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta: 25°C	18mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
100%  75%  50% 				
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab

4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	TEMPERATURE RISE TEST	MODEL : NDR-240-24			
		1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : FULL LOAD Ta= 19.1 °C			
		2. HIGH AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : FULL LOAD Ta=47.0°C			
		NO	Position	ROOM AMBIENT Ta=19.1°C	HIGH AMBIENT Ta=47.0°C
		1	V1	35.4°C	61.7°C
		2	LF1	41.0°C	67.8°C
		3	LF2	55.1°C	81.1°C
		4	BD1	49.3°C	76.0°C
		5	LF3	43.9°C	69.6°C
		6	L4	41.6°C	68.4°C
		7	C5	45.8°C	72.7°C
		8	U1	59.3°C	86.5°C
		9	C105	69.5°C	98.0°C
		10	L100	64.2°C	93.9°C
		11	T1	74.9°C	101.3°C
		12	D102	74.0°C	100.6°C
		13	D101	73.2°C	101.8°C
		14	Q2	63.2°C	89.1°C
		15	D10	61.3°C	89.1°C
		16	Q1	49.0°C	76.5°C
		17	TSW1	60.2°C	87.0°C
		18	U200	39.6°C	67.1°C
		19	C68	63.0°C	91.1°C
		20	D22	35.4°C	61.7°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230 VAC	TEST : OK	
		1 HOUR (MIN)	O/P : 114 % LOAD		
			Ta : 25°C		

3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -25 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 49.8°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.00149 %/°C (0~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C ~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -20°C ~ +70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec : turn off 2sec		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(1) 191095HRS (2) 35482HRS (3) 54495HRS (4) 91672HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 230.2 KHRS		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50°C		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014