


DK 100 B020 / DK 200 B020:

Transfer characteristics

- DC measurement ¹⁾ (magnitude only)

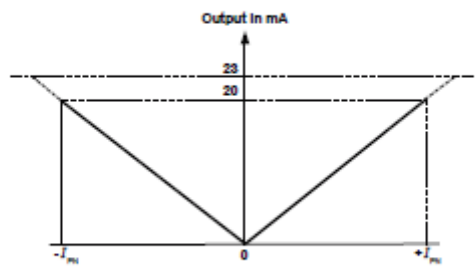


Note: ¹⁾ The performance specified in the datasheet is valid within the 0-20 mA output range only.

DK 100 B420 / DK 200 B420:

Transfer characteristics

- DC measurement ¹⁾ (magnitude only)

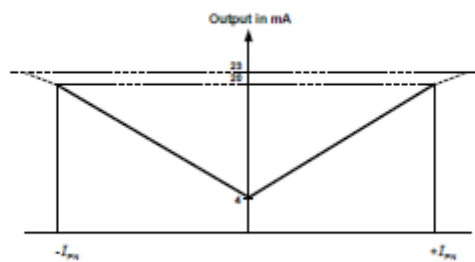


Note: ¹⁾ The performance specified in the datasheet is valid within the 4-20 mA output range only.

DK 100 B420U / DK 200 B420 U:

Transfer characteristics

- DC unidirectional measurement ¹⁾

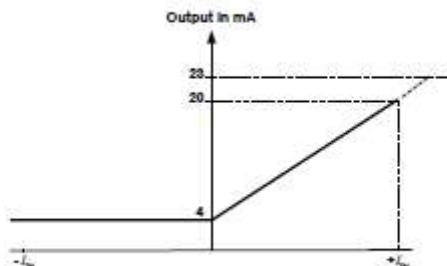


Note: ¹⁾ The performance specified in the datasheet is valid within the 4-20 mA output range only.

DK 100 B420 B / DK 200 B420 B:

Transfer characteristics

- DC bipolar measurement ¹⁾ (magnitude and direction)

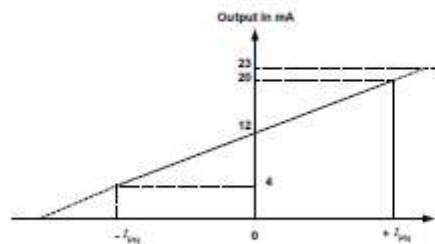


Note: ¹⁾ The performance specified in the datasheet is valid within the 4-20 mA output range only.

DK 100 B5 / DK 200 B5:

Transfer characteristics

- DC measurement ¹⁾ (magnitude only)

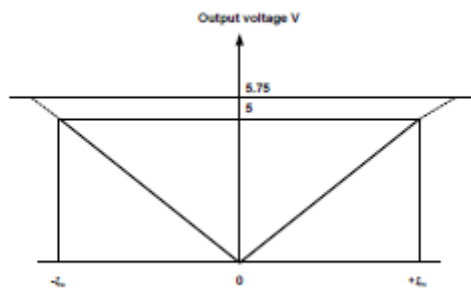


Note: ¹⁾ The performance specified in the datasheet is valid within the 0-5 V DC output range only.

DK 100 B10 / DK 200 B10:

Transfer characteristics

- DC measurement ¹⁾ (magnitude only)

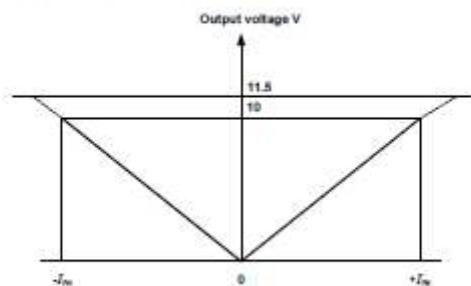

Note: ¹⁾ The performance specified in the datasheet is valid within the 0-10 V DC output range only.