


DK 20 C420 B – DK 100 C420 B:

Transfer characteristics

- DC bipolar measurement ¹⁾ (magnitude and direction ²⁾)

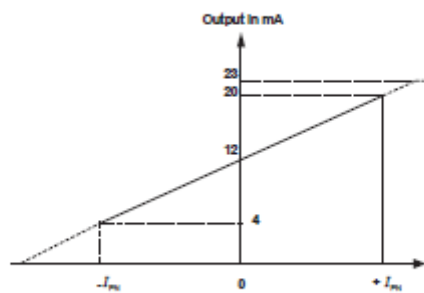


Notes: ¹⁾ The performance specified in the datasheet is valid within the 4-20 mA output range only
²⁾ See arrow in the above diagram (dimensions).

DK 20 C420 U / DK 100 C420 U:

Transfer characteristics

- DC unidirectional measurement ¹⁾

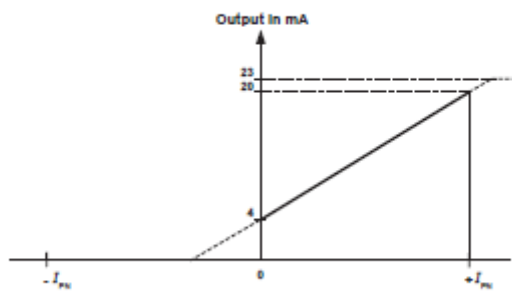


Notes: ¹⁾ The performance specified in the datasheet is valid within the 4-20 mA output range only.

DK 20 C5 U / DK 100 C5 U:

Transfer characteristics

- DC unidirectional measurement ¹⁾

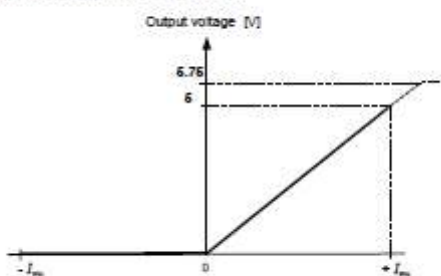


Notes: ¹⁾ The performance specified in the datasheet is valid within the 0-5 V output range only.

DK 20 C10 U / DK 100 C10 U:

Transfer characteristics

- DC unidirectional measurement ¹⁾

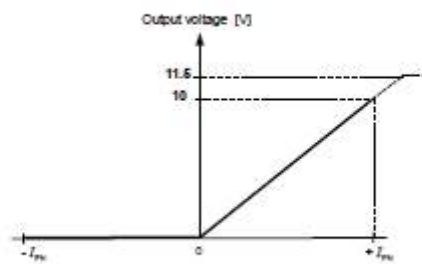

Note: ¹⁾ The performance specified in the datasheet is valid within the 0-10 V output range only.