



CFM06S SERIES

6 WATT SINGLE OUTPUT AC-DC OPEN FRAME



Features

- * Universal Input 90~264VAC
- * High Efficiency up to 83%
- * Approved EN55032 Class B and CISPR/FCC Class B
- * Approved IEC/EN/UL 62368-1
- * Meets IEC/EN60335-1
- * Continuous Short Circuit Protection
- * No Load Input Power < 75mW
- * Over Voltage Protection
- * Constant Current (Optional)
- * Class II



Ordering information

CFM06SXXX - X

Blank: PCB mount

E: Encapsulated

T: WAFER

MODEL	Output Voltage	Output Current	Ripple (mV p-p) NOTE 1	Voltage Accuracy NOTE 2	Line Regulation NOTE 3	Load Regulation NOTE 4	% EFF. (typ.) NOTE 5
CFM06S033	3.3V	1.5A	100mV	±6%	±1%	±6%	75%
CFM06S050	5V	1.2A	100mV	±5%	±1%	±5%	78%
CFM06S090	9V	0.67A	100mV	±5%	±1%	±5%	81%
CFM06S120	12V	0.5A	120mV	±3%	±1%	±3%	81%
CFM06S150	15V	0.4A	150mV	±3%	±1%	±3%	81%
CFM06S240	24V	0.25A	240mV	±3%	±1%	±3%	83%

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

章 節	CFM-37
頁 次	1-1

Specifications

INPUT SPECIFICATIONS:

Voltage	90~264Vac 120~370Vdc
Frequency	47 to 63Hz
Inrush Current	90A max. @240Vac. Cold Start @25°C
Leakage Current	0.25mA max. @ 264Vac
Input Current	0.25A max.


OUTPUT SPECIFICATIONS:

Holdup Time	12ms typ. @115Vac
Short Circuit Protection	Hiccup Mode (Auto Recovery)
Temperature Coefficient	±0.05%/°C

GENERAL SPECIFICATIONS:

Isolation Voltage(Input to Output)	3000VAC:
Operating Temperature	-40°C~80°C (Derating from 60°C to 80°C)
Storage Temperature	-40°C~85°C
Cooling	Natural Convection
Humidity	93% RH max. Non Condensing
Switching Frequency	30~70KHz Typical
MTBF	MIL-HDBK-217F, GB, 25°C/115VAC 1120Khrs max.
Life Time	.56000 hours min.@ 75% load, 40°C
Altitude	5000m
Dimensions	1.555x0.764x0.720 Inches (39.50x19.40x18.30mm) -E: 1.618x0.827x0.787 Inches (41.10x21.00x20.00mm) -T: 1.950x0.728x0.689 Inches (49.53x18.50x17.5mm)
Weight	11g, (-E): 30g, (-T): 12g

CFM06S Series De-rating Curve

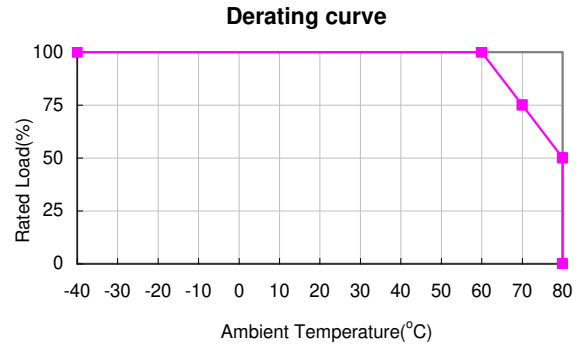


SAFETY AND EMISSION:

Emission and Immunity	EN55032 Class B, EN55024, EN61204-3 EN61000-3-2, -3, EN61000-6-1, 2, 3, 4 47 CFR FCC Part 15 Subpart B (Class B)
Safety	IEC/EN/UL 62368-1, IEC60950-1

NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measuring @20MHz BW.
2. Voltage accuracy is set of 100% rated load.
3. Line regulation is measured from high line to low line with full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230Vac and full load at 25°C
6. T Version wafer with JST B3B-PH/B2B-PH and mate with JST housing PH series or equivalent.

Mechanical Specification

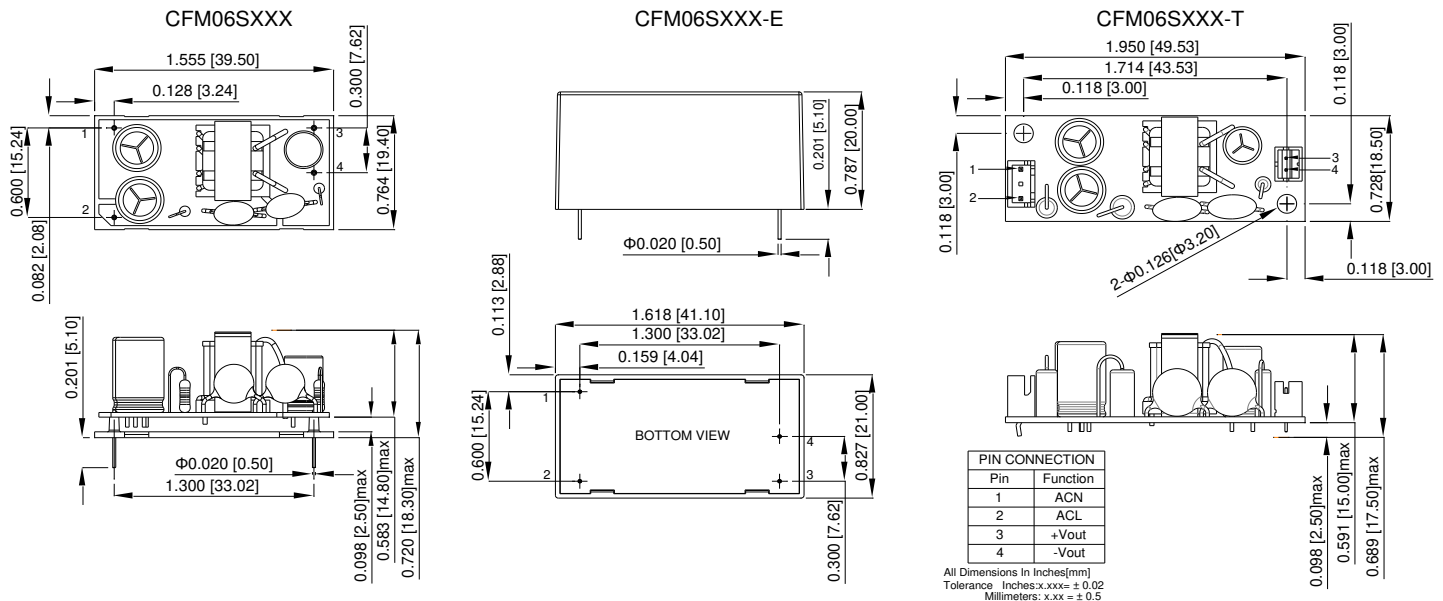

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

章 節	CFM-37
頁 次	1-2