



## CFM500M SERIES 500 WATT MEDICAL AC-DC POWER SUPPLY WITH PFC

### Features

- Universal Input Range 80~264V<sub>ac</sub>
- High Efficiency up to 94.5%
- 3"x 5" Compact Size
- Class I
- No Load Power Consumption<0.5W
- Approval IEC/EN/UL 60601-1 2 MOPP
- Approval EN 55011, 47 CFR FCC Part 18
- Active PFC Meets EN 61000-3-2
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- High Power Density up to 20.96W/Inch<sup>3</sup>
- 390W Natural, 470 ~ 500W Conduction Convection
- Over Temperature Protection
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output
- Low Inrush Current



| MODEL<br>NUMBER         | OUTPUT<br>VOLTAGE | OUTPUT CURRENT |             |        | VOLTAGE<br>ACCURACY<br>NOTE2 | RIPPLE<br>&NOISE<br>NOTE3 | VOLTAGE<br>ADJ. RANGE | LINE<br>REGULATION<br>NOTE4 | LOAD<br>REGULATION<br>NOTE5 | %EFF.<br>(Typ.) |
|-------------------------|-------------------|----------------|-------------|--------|------------------------------|---------------------------|-----------------------|-----------------------------|-----------------------------|-----------------|
|                         |                   | NOTE1          |             |        |                              |                           |                       |                             |                             |                 |
|                         |                   | With FAN       | Without FAN |        |                              |                           |                       |                             |                             |                 |
| COVER                   | OPEN              |                |             |        |                              |                           |                       |                             |                             |                 |
| CFM500M120              | 12 V              | 41.67A         | 27.5A       | 25A    | ±1%                          | 120mV                     | 11.4~12.6 V           | ±0.5%                       | ±1%                         | 92.5%           |
| CFM500M180              | 18 V              | 27.78A         | 18.33A      | 16.67A | ±1%                          | 150mV                     | 17.1~18.9 V           | ±0.5%                       | ±1%                         | 93.5%           |
| CFM500M240              | 24 V              | 20.83A         | 17.08A      | 15.83A | ±1%                          | 150mV                     | 22.8~25.2 V           | ±0.5%                       | ±1%                         | 94.5%           |
| CFM500M360              | 36 V              | 13.89A         | 11.39A      | 10.56A | ±1%                          | 200mV                     | 34.2~37.8 V           | ±0.5%                       | ±1%                         | 94.5%           |
| CFM500M480              | 48 V              | 10.42A         | 8.54A       | 7.92A  | ±1%                          | 250mV                     | 45.6~50.4 V           | ±0.5%                       | ±1%                         | 94.5%           |
| Stand-by Output Voltage |                   |                |             |        |                              |                           |                       |                             |                             |                 |
| All                     | +5V               | 1A             |             |        | ±3%                          | 1%                        | ---                   | ±1%                         | ±5%                         | ---             |
| Fan Output Voltage      |                   |                |             |        |                              |                           |                       |                             |                             |                 |
| All                     | +12V              | 0.5A (NOTE 6)  |             |        | ---                          | ---                       | ---                   | ---                         | ---                         | ---             |

Note:

1. Forced air convection with 21CFM Fan.
2. Voltage accuracy is set at 100% full load and 25°C Ta.
3. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz B.W.
4. Line regulation is measured from high line to low line with 100% full load.
5. Load regulation is measured from 10% to 100% full load.
6. Fan output can only operate normal when the stand-by output is above 0.5A.

### PART NUMBER

| Series | Number of Outputs | Nominal Output Voltage                                   | Type                                  |
|--------|-------------------|----------------------------------------------------------|---------------------------------------|
| CFM500 | X                 | XXX                                                      | Y (Option)                            |
| CFM500 | M: Medical        | 120: 12V<br>180: 18V<br>240: 24V<br>360: 36V<br>480: 48V | None: With Baseplate<br>C: With Cover |

Part Number Example:

**CFM500M120:** With Baseplate, 500W, 12Vdc Output

**CFM500M120C:** With Cover, 500W, 12Vdc Output



# CFM500M Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                  | NOTES and CONDITIONS                  | Device | Min. | Typ. | Max. | Units           |
|----------------------------|---------------------------------------|--------|------|------|------|-----------------|
| Input Voltage              | Safety approvals only to the AC input | All    | 80   |      | 264  | V <sub>ac</sub> |
| Operating Case Temperature | See Derating Curve                    | All    | -40  |      | 85   | °C              |
| Storage Temperature        |                                       | All    | -40  |      | 85   | °C              |
| Operating Altitude         |                                       | All    |      |      | 5000 | m               |

### INPUT CHARACTERISTICS

| PARAMETER               | NOTES and CONDITIONS                                     | Device | Min. | Typ. | Max. | Units           |
|-------------------------|----------------------------------------------------------|--------|------|------|------|-----------------|
| Operating Voltage Range |                                                          | All    | 100  |      | 240  | V <sub>ac</sub> |
| Input Frequency Range   |                                                          | All    | 47   |      | 63   | Hz              |
| Maximum Input Current   | 100% Full Load, V <sub>in</sub> =100V <sub>ac</sub>      | All    |      |      | 6    | A               |
| Power Factor            | V <sub>in</sub> =230V <sub>ac</sub>                      | All    |      | 0.97 |      |                 |
| Leakage Current         |                                                          | All    |      |      | 0.3  | mA              |
| Inrush Current          | V <sub>in</sub> =240V <sub>ac</sub> , Cold start at 25°C | All    |      | 8.5  |      | A               |

### OUTPUT CHARACTERISTICS

| PARAMETER                      | NOTES and CONDITIONS                                                                                                                                        | Device     | Min.  | Typ. | Max.  | Units           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------|------|-------|-----------------|
| Output Voltage Set Point       | V <sub>in</sub> =Nominal V <sub>in</sub> , I <sub>o</sub> =I <sub>o</sub> max., T <sub>c</sub> =25°C.                                                       | CFM500M120 | 11.88 | 12   | 12.12 | V <sub>dc</sub> |
|                                |                                                                                                                                                             | CFM500M180 | 17.82 | 18   | 18.18 |                 |
|                                |                                                                                                                                                             | CFM500M240 | 23.76 | 24   | 24.24 |                 |
|                                |                                                                                                                                                             | CFM500M360 | 35.64 | 36   | 36.36 |                 |
|                                |                                                                                                                                                             | CFM500M480 | 47.52 | 48   | 48.48 |                 |
| Operating Output Current Range | V <sub>in</sub> =80V <sub>ac</sub> ~264V <sub>ac</sub> , See Derating Curve                                                                                 | CFM500M120 |       |      | 41.67 | A               |
|                                |                                                                                                                                                             | CFM500M180 |       |      | 27.78 |                 |
|                                |                                                                                                                                                             | CFM500M240 |       |      | 20.83 |                 |
|                                |                                                                                                                                                             | CFM500M360 |       |      | 13.89 |                 |
|                                |                                                                                                                                                             | CFM500M480 |       |      | 10.42 |                 |
| Holdup Time                    | V <sub>in</sub> =115V <sub>ac</sub>                                                                                                                         | All        |       | 16   |       | ms              |
| Output Voltage Regulation      |                                                                                                                                                             |            |       |      |       |                 |
| Load Regulation                | 10% Load to 100% full load                                                                                                                                  | All        |       |      | ±1.0  | %               |
| Line Regulation                | V <sub>in</sub> =High line to low line                                                                                                                      | All        |       |      | ±0.5  | %               |
| Over Voltage Protection        | Latch off (AC recycle to reset)                                                                                                                             | CFM500M120 |       |      | 16    | V <sub>dc</sub> |
|                                |                                                                                                                                                             | CFM500M180 |       |      | 30    |                 |
|                                |                                                                                                                                                             | CFM500M240 |       |      | 35    |                 |
|                                |                                                                                                                                                             | CFM500M360 |       |      | 50    |                 |
|                                |                                                                                                                                                             | CFM500M480 |       |      | 63    |                 |
| Over Current Protection        | Auto recovery                                                                                                                                               | All        | 120   |      | 190   | %               |
| Short Circuit Protection       | Auto recovery                                                                                                                                               | All        |       |      |       |                 |
| Output Ripple and Noise        | 1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output<br>2. Oscilloscope is 20MHz band width<br>3. Ambient temperature=25°C | CFM500M120 |       |      | 120   | mV              |
|                                |                                                                                                                                                             | CFM500M180 |       |      | 150   |                 |
|                                |                                                                                                                                                             | CFM500M240 |       |      | 150   |                 |
|                                |                                                                                                                                                             | CFM500M360 |       |      | 200   |                 |
|                                |                                                                                                                                                             | CFM500M480 |       |      | 250   |                 |



## CFM500M Series

| PARAMETER        | NOTES and CONDITIONS                                                                                                        | Device                                                             | Min. | Typ.                                 | Max.                                      | Units    |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|------|--------------------------------------|-------------------------------------------|----------|
| Load Capacitance | 1. $V_{in}=115V_{ac}$ and $230V_{ac}$<br>2. Output is 100% full load<br>3. Ambient temperature= $25^{\circ}C$               | CFM500M120<br>CFM500M180<br>CFM500M240<br>CFM500M360<br>CFM500M480 |      |                                      | 42900<br>28600<br>20800<br>14000<br>10800 | $\mu F$  |
| Efficiency       | 1. $V_{in}=230V_{ac}$<br>2. Output is 100% full load<br>3. Ambient temperature= $25^{\circ}C$                               | CFM500M120<br>CFM500M180<br>CFM500M240<br>CFM500M360<br>CFM500M480 |      | 92.5<br>93.5<br>94.5<br>94.5<br>94.5 |                                           | %        |
| PS-On Signal     | Power on<br>Power off (PS-ON and GND open)                                                                                  | All                                                                | 0    |                                      | 2                                         | $V_{dc}$ |
|                  | Power on (PS-ON and GND short)<br>Power-off (PS-ON and GND open)                                                            |                                                                    |      | 4<br>10<br>0                         |                                           | mA       |
| Power Good (PG)  | 1. $V_{in}=80V_{ac}\sim 264V_{ac}$<br>2. Output is 100% full load<br>3. The TTL goes high after power set up                | All                                                                | 100  |                                      | 500                                       | ms       |
| Power Fail (PF)  | 1. $V_{in}=80V_{ac}\sim 264V_{ac}$<br>2. Output is 100% full load<br>3. The TTL goes low before $V_o$ below 90% rated value | All                                                                | 1    | 10                                   |                                           | ms       |

### ISOLATION CHARACTERISTICS

| PARAMETER            | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units     |
|----------------------|----------------------|--------|------|------|------|-----------|
| Input to Output      | 1 minute             | All    |      |      | 4000 | $V_{ac}$  |
| Isolation Resistance | Input to output      | All    | 100  |      |      | $M\Omega$ |

### FEATURE CHARACTERISTICS

| PARAMETER                 | NOTES and CONDITIONS  | Device | Min. | Typ. | Max. | Units |
|---------------------------|-----------------------|--------|------|------|------|-------|
| Switching Frequency       | Pout=max. rated power | All    |      | 65   |      | kHz   |
| Output Voltage adjustment |                       | All    | -5   |      | +5   | %     |

### GENERAL SPECIFICATIONS

| PARAMETER                  | NOTES and CONDITIONS                                                                                                                                                    | Device | Min.                                                | Typ.       | Max. | Units         |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------------------------------|------------|------|---------------|
| MTBF                       | $I_o=100\%$ ; $T_a=25^{\circ}C$ per MIL-HDBK-217F                                                                                                                       | All    |                                                     | 200        |      | k hours       |
| Humidity                   | Non-condensing                                                                                                                                                          | All    |                                                     |            | 93   | % RH          |
| Shock                      | Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times( $\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis)                                                                 | All    |                                                     | 75         |      | g             |
| Vibration                  | Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.                                                                           | All    |                                                     | 4          |      | g             |
| Weight                     | Baseplate versions<br>Covered versions                                                                                                                                  | All    |                                                     | 515<br>635 |      | g             |
| Dimensions                 | With baseplate                                                                                                                                                          | All    | 5.000x3.000x1.540 Inches<br>(127.00x76.20x39.10 mm) |            |      |               |
|                            | C (with cover)                                                                                                                                                          | All    | 5.354x3.425x1.673 Inches<br>(136.00x87.00x42.50 mm) |            |      |               |
| Safety                     | Class I, IEC 60601-1:2005, COR1:2006, COR2:2007, AMD1:2012<br>EN 60601-1:2006+A11+A1+A12<br>ANSI/AAMI ES60601-1 (2005/(R)2012+A1:2012, C1:2009/(R)2012+A2:2010/(R)2012) |        |                                                     |            |      | Ed 3.1        |
| EMC Emission               | EN 55011:2009+A1:2010, CISPR 11:2009+A1:2010, Class B,<br>IEC 61000-3-2:2014, IEC 6100-3-3:2013, 47 CFR FCC Part 18                                                     |        |                                                     |            |      |               |
| Conducted Disturbance      | EN 55011:2009+A1:2010, CISPR 11:2009+A1:2010, 47 CFR FCC Part 18                                                                                                        |        |                                                     |            |      | Class B       |
| Radiated Disturbance       | EN 55011:2009+A1:2010, CISPR 11:2009+A1:2010, 47 CFR FCC Part 18                                                                                                        |        |                                                     |            |      | Class B       |
| Harmonic Current Emissions | IEC 61000-3-2:2014                                                                                                                                                      |        |                                                     |            |      | Class A, C, D |



# CFM500M Series

## GENERAL SPECIFICATIONS


|                                                  |                                                                                                                                                |             |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Voltage Fluctuations & Flicker                   | IEC 61000-3-3:2013                                                                                                                             |             |
| <b>EMC Immunity</b>                              | EN 60601-1-2:2015, IEC 61000-4-2,3,4,5,6,8,11                                                                                                  | Ed 4.0      |
| Electrostatic Discharge (ESD)                    | IEC 61000-4-2:2008, Air Discharge: $\pm 15\text{kV}$ , Contact Discharge: $\pm 8\text{kV}$                                                     | Criterion A |
| Radio-Frequency, Continuous Radiated Disturbance | IEC 61000-4-3:2006+A1:2007+A2:2010                                                                                                             | Criterion A |
| Electrical Fast Transient (EFT)                  | IEC 61000-4-4:2012, $\pm 2\text{kV}$                                                                                                           | Criterion A |
| Surge                                            | IEC 61000-4-5:2014+A1:2017, L-N: $\pm 0.5\text{kV}$ , $\pm 1\text{kV}$ , L-E(Ground): $\pm 0.5\text{kV}$ , $\pm 1\text{kV}$ , $\pm 2\text{kV}$ | Criterion A |
| Conducted Disturbances, Induced by RF Fields     | IEC C61000-4-6:2013+C0R1:2015                                                                                                                  | Criterion A |
| Power Frequency Magnetic Field                   | IEC 61000-4-8:2009                                                                                                                             | Criterion A |
| Voltage Dips                                     | IEC 61000-4-11:2004+A1:2017, Dip: 30% Reduction, Dip >95% Reduction                                                                            | Criterion A |
| Voltage Interruptions                            | IEC 61000-4-11:2004+A1:2017, >95% Reduction                                                                                                    | Criterion B |
| Application Note Link                            | <a href="#">CFM500M Series App Notes</a>                                                                                                       |             |

## CHARACTERISTIC CURVE

### Power Derating Curve


#### Forced Air Flow

Output power & Input voltage

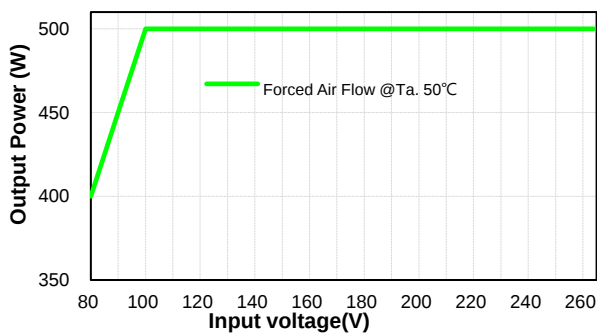


#### Forced Air Flow

Output power vs Ambient Temperature

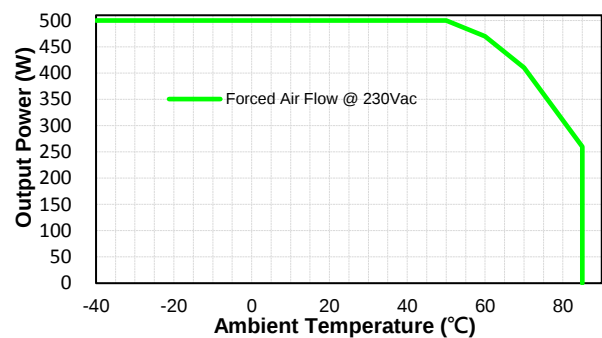


#### Natural Convection

Output power & Input Voltage

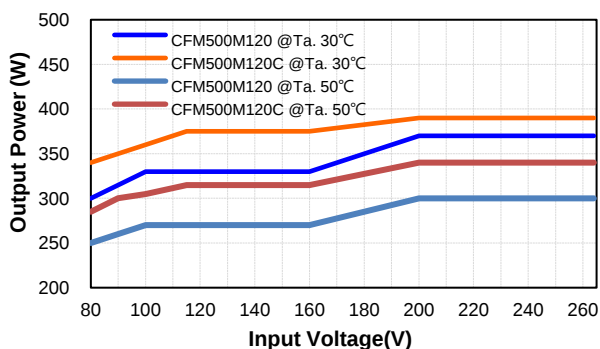

#### Natural Convection


Output power vs Ambient Temperature

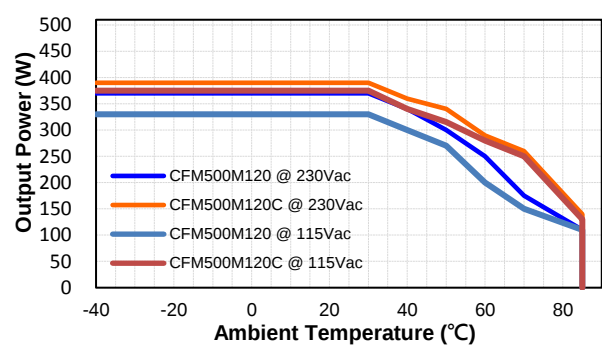




## CFM500M Series


Output power & Input Voltage

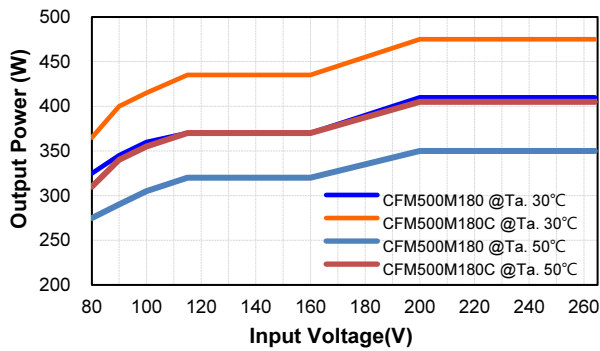


Output power vs Ambient Temperature

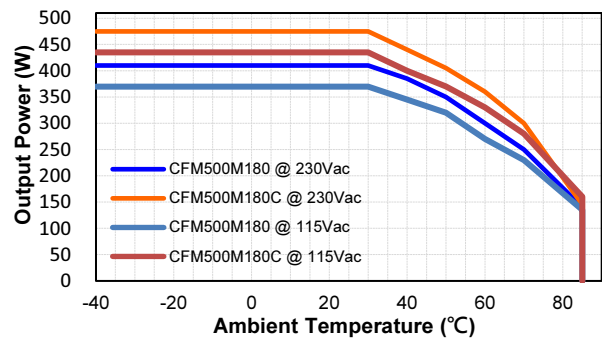


Output power & Input Voltage

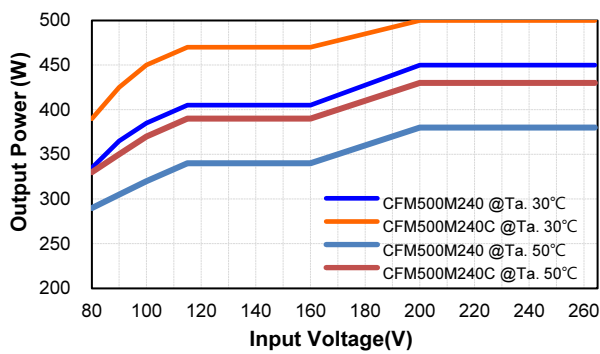


Output power vs Ambient Temperature

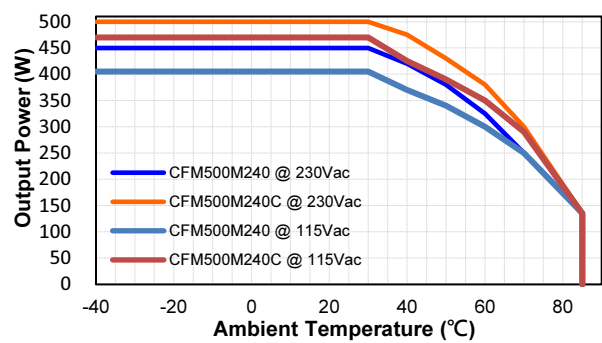


Output power & Input Voltage

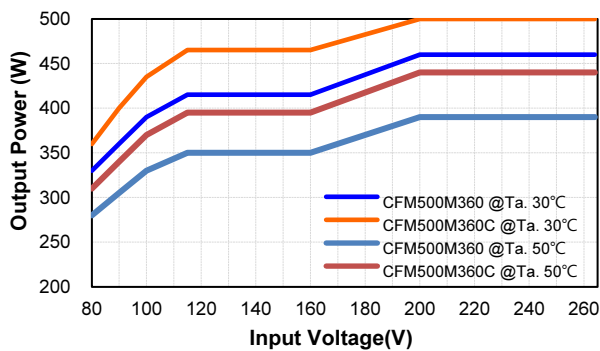


Output power vs Ambient Temperature

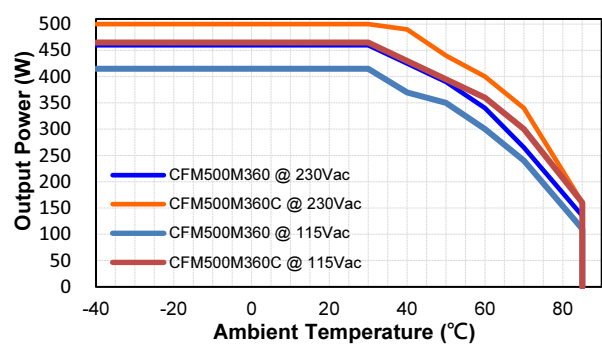

Output power & Input Voltage

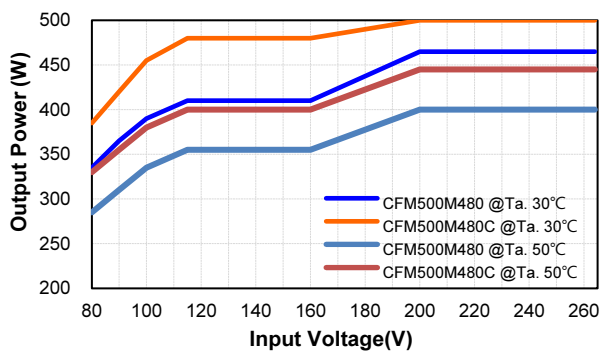


Output power vs Ambient Temperature

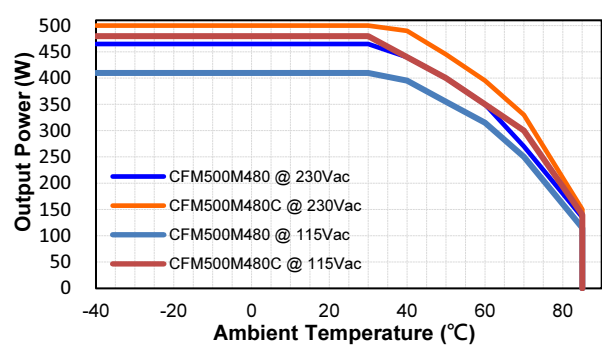




Conduction Convection with External Baseplate  
(48x24.8x0.12cm)

Output power & Input Voltage

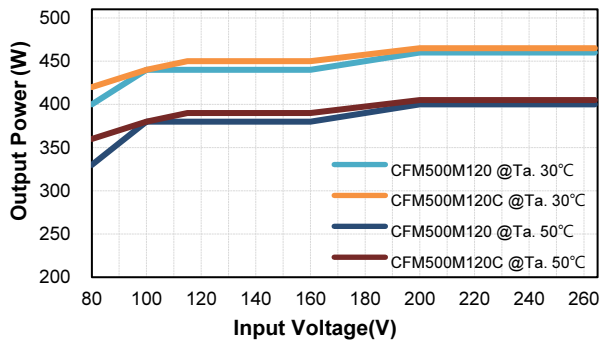


CFM500M Series  
Conduction Convection with External Baseplate  
(48x24.8x0.12cm)


Output power vs Ambient Temperature

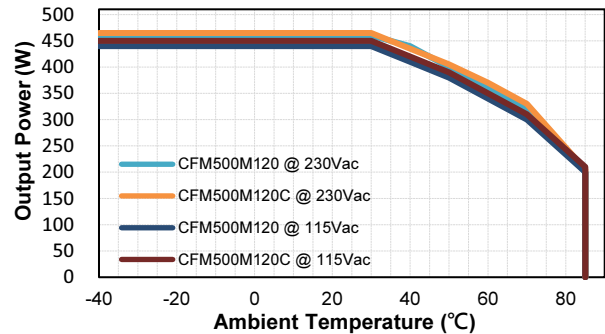


Output power & Input Voltage

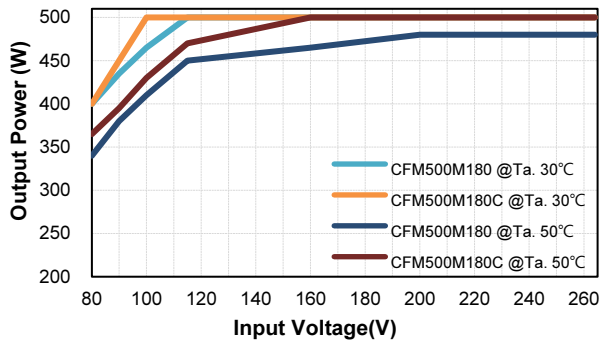


Output power vs Ambient Temperature

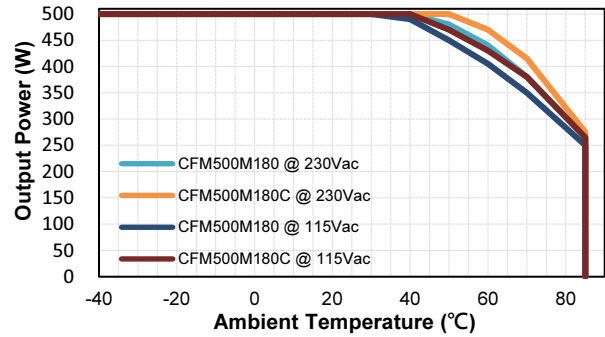


Output power & Input Voltage

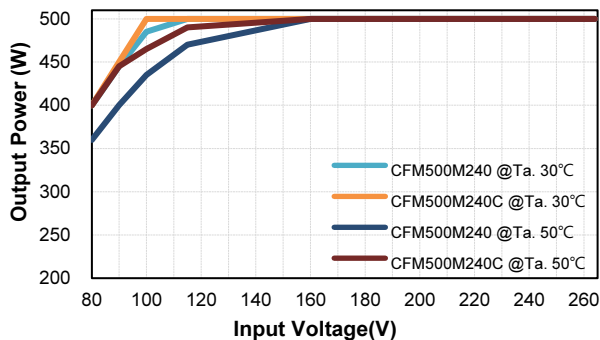


Output power vs Ambient Temperature

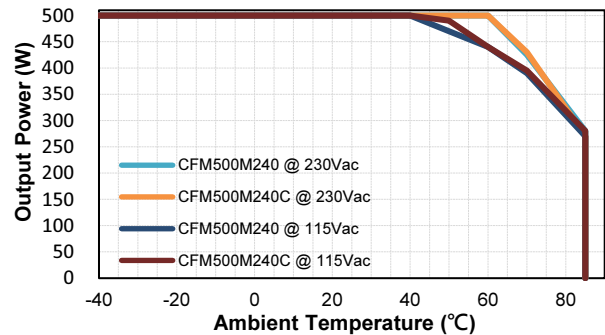

Output power & Input Voltage

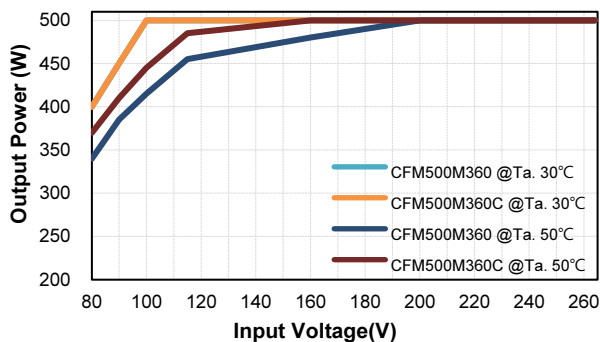


Output power vs Ambient Temperature

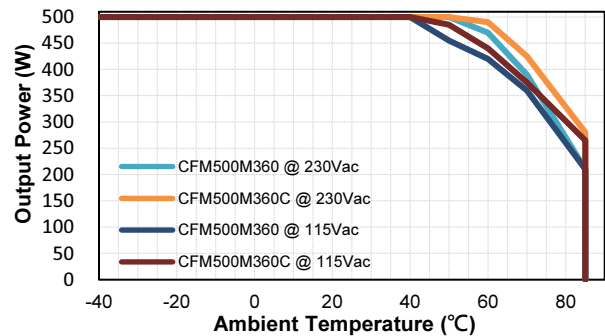




# CFM500M Series

Output power & Input Voltage

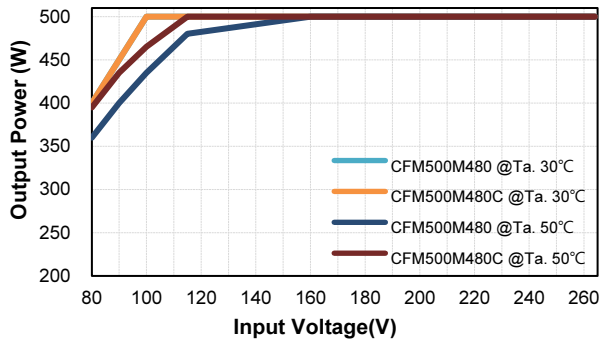


Output power vs Ambient Temperature

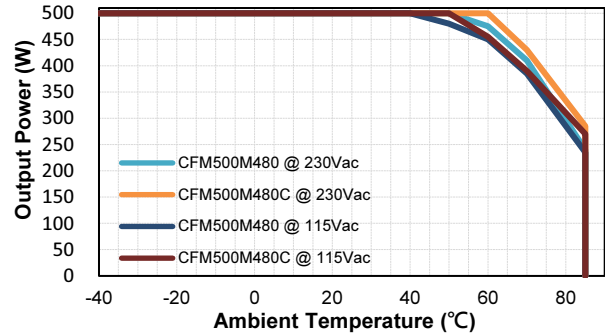


## Performance Data


CFM500M120 (Eff Vs Io)

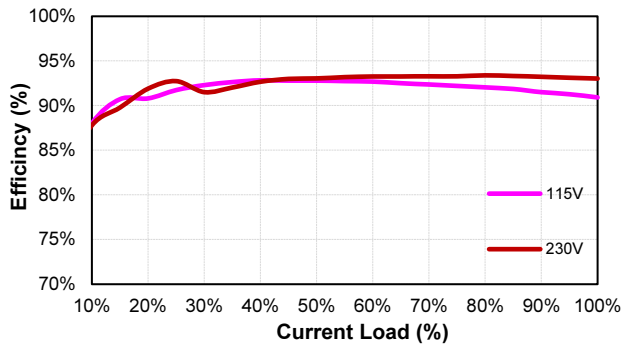


CFM500M180 (Eff Vs Io)

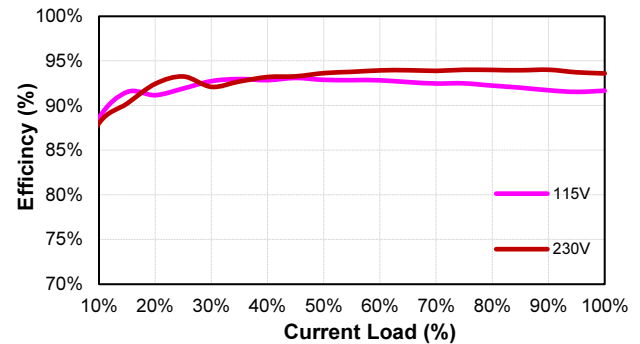


CFM500M240 (Eff Vs Io)

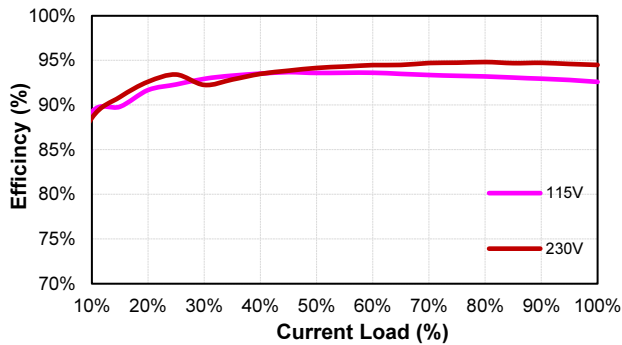

CFM500M360 (Eff Vs Io)

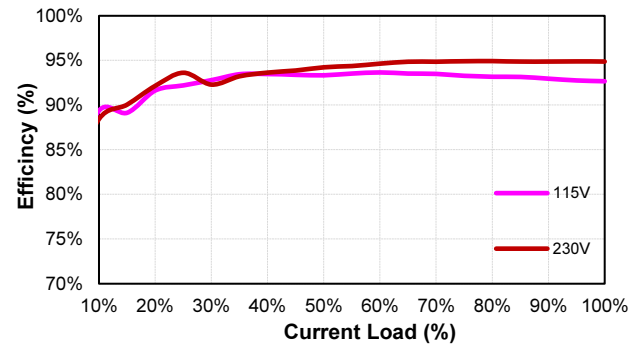



CFM500M480 (Eff Vs Io)

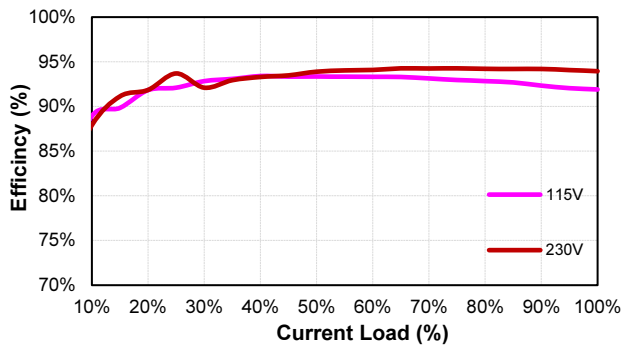



# CFM500M Series

## MECHANICAL SPECIFICATION

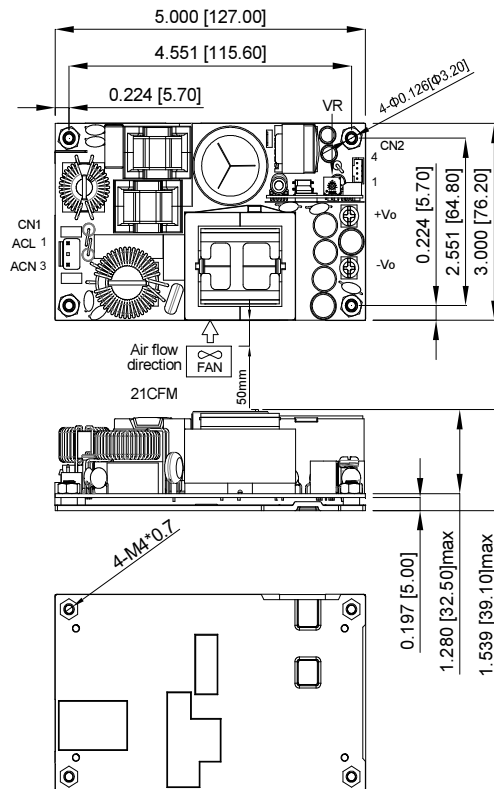

CN1:  
PIN CONNECTION

| Pin | Function |
|-----|----------|
| 1   | ACL      |
| 2   | -        |
| 3   | ACN      |

CN2:  
PIN CONNECTION



| Pin | Function |
|-----|----------|
| 1   | GND      |
| 2   | +5VSB    |
| 3   | GND      |
| 4   | +12V-FAN |

CN3:  
PIN CONNECTION

| Pin | Function |
|-----|----------|
| 1   | GND      |
| 2   | PF       |
| 3   | FAN-EN   |
| 4   | PS-ON    |
| 5   | -Sense   |
| 6   | +Sense   |
| 7   | OPTION   |

All Dimensions In Inches[mm]  
Tolerance Inches:x.xxx= ± 0.02  
Millimeters: x.xx = ± 0.5

## CFM500MXXX

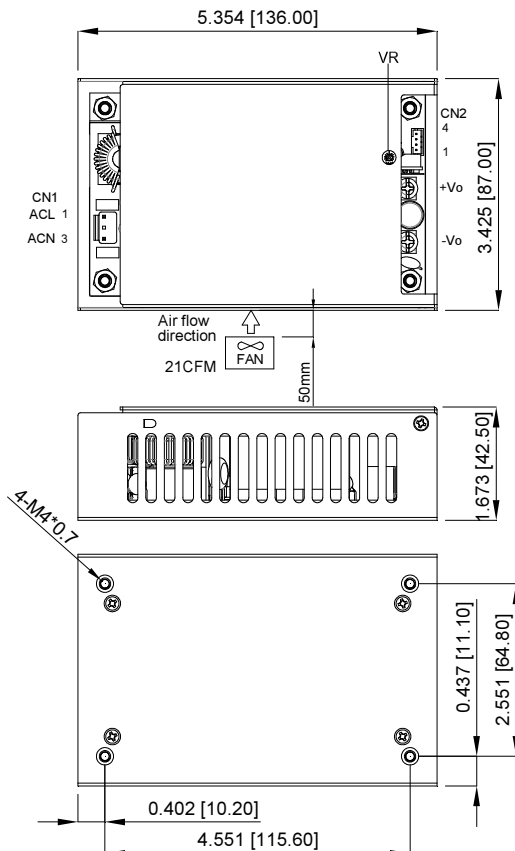

CN1:  
PIN CONNECTION

| Pin | Function |
|-----|----------|
| 1   | ACL      |
| 2   | -        |
| 3   | ACN      |

CN2:  
PIN CONNECTION

| Pin | Function |
|-----|----------|
| 1   | GND      |
| 2   | +5VSB    |
| 3   | GND      |
| 4   | +12V-FAN |

CN3:  
PIN CONNECTION

| Pin | Function |
|-----|----------|
| 1   | GND      |
| 2   | PF       |
| 3   | FAN-EN   |
| 4   | PS-ON    |
| 5   | -Sense   |
| 6   | +Sense   |
| 7   | OPTION   |

All Dimensions In Inches[mm]  
Tolerance Inches:x.xxx= ± 0.02  
Millimeters: x.xx = ± 0.5

## CFM500MXXXC

CINCON Electronics Co. Ltd.  
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
Tel: 886-2-27086210  
Fax: 886-2-27029852  
E-mail: sales@cincon.com.tw  
Web: [www.cincon.com.tw](http://www.cincon.com.tw)