



Test Report: DDR-15L-15

15W DIN Rail type DC-DC Converter

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

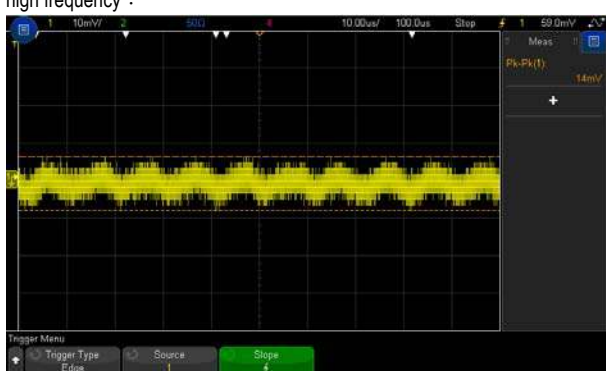
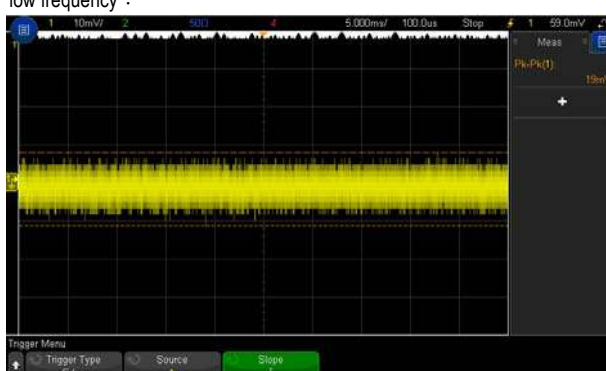
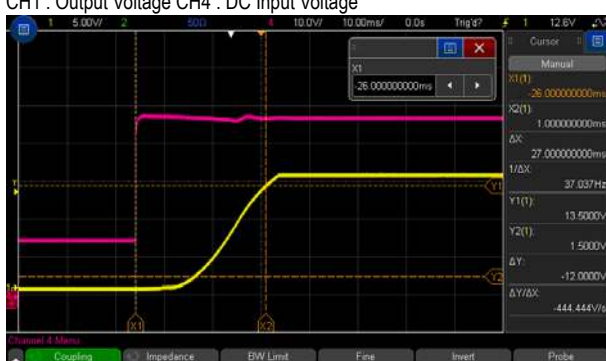
E.M.C. Test

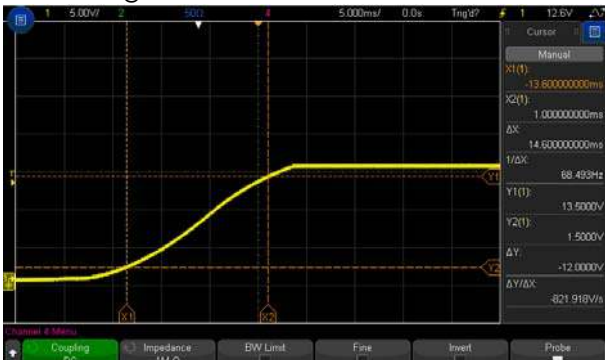
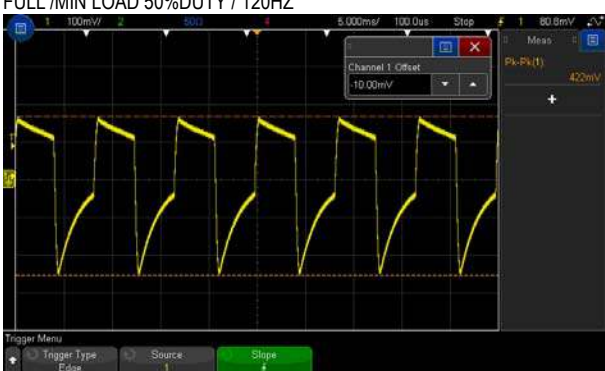
■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

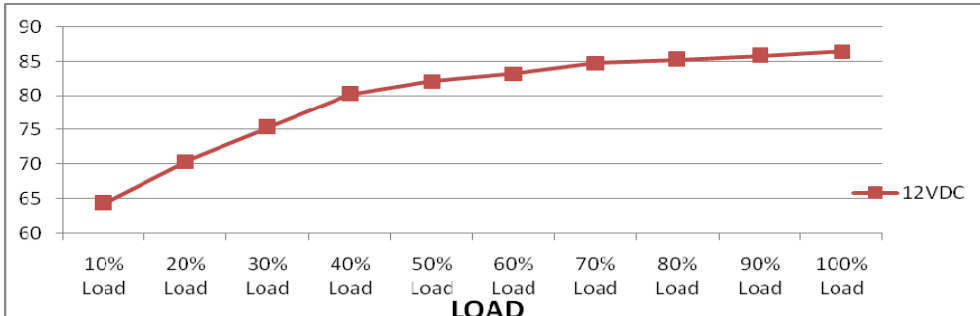
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1:13.5 V~16.5 V	I/P : 48 VDC O/P : MIN LOAD Ta : 25°C	13.21V~16.90V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: -2%~ 2%	I/P:18 VDC / 75VDC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.05 %~ 0.05 %
3	LINE REGULATION (Max)	V1:-0.5%~ 0.5%	I/P: 18 VDC / 75VDC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0 %
4	LOAD REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 48VDC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.05 %~ 0.05 %
5	OVER/UNDERSHOOT TEST	< ±5%	I/P:48VDC O/P:FULL LOAD Ta:25°C	TEST: 2%
6	RIPPLE & NOISE (Max)	V1: 75 mVp-p	I/P: 48VDC O/P:FULL LOAD Ta:25°C	V1: 19 mVp-p
high frequency :  low frequency : 				
7	SET UP TIME (Max)	48VDC/120 ms	I/P:48 VDC O/P:FULL LOAD Ta:25°C	48VDC/ 27 ms
INPUT=48VDC @ FULL LOAD CH1 : Output Voltage CH4 : DC Input Voltage 				

8	RISE TIME (Max)	48VDC/ 85 ms	I/P: 48 VDC O/P:FULL LOAD Ta:25°C	48VDC/ 14.6 ms
	INPUT=48VDC@ FULL LOAD 			
9	HOLD UP TIME (TYP)	48VDC/16ms	I/P: 48VDC O/P:FULL LOAD Ta:25°C	48VDC/ 17.6 ms
	INPUT=48VDC @ FULL LOAD CH1 : Output Voltage CH4 : DC Input Voltage 			
10	DYNAMIC LOAD	V1: 1500 mVp-p	I/P: 48VDC O/P: (1)FULL /MIN LOAD 50%DUTY / 120HZ (2)FULL /MIN LOAD 50%DUTY / 1KHZ Ta:25°C	422mVp-p 231mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ  FULL /MIN LOAD 50%DUTY / 1KHZ 			

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	18VDC~ 75 VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	17.699V~ 75V

			I/P: LOW-LINE-0.2=17.8V HIGH-LINE+3V=78V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK																						
2	INPUT CURRENT(TYP)	48VDC/0.4 A	I/P: 48VDC O/P:FULL LOAD Ta:25°C	I =0.359A/48VDC																						
3	EFFICIENCY(TYP)	86 %	I/P: 48VDC O/P:FULL LOAD Ta:25°C	86.44%																						
EFFICIENCY vs LOAD																										
 <table><caption>Efficiency vs Load Data (12VDC)</caption><thead><tr><th>Load (%)</th><th>Efficiency (%)</th></tr></thead><tbody><tr><td>10%</td><td>65</td></tr><tr><td>20%</td><td>70</td></tr><tr><td>30%</td><td>75</td></tr><tr><td>40%</td><td>80</td></tr><tr><td>50%</td><td>82</td></tr><tr><td>60%</td><td>83</td></tr><tr><td>70%</td><td>84</td></tr><tr><td>80%</td><td>85</td></tr><tr><td>90%</td><td>86</td></tr><tr><td>100%</td><td>86.44</td></tr></tbody></table>					Load (%)	Efficiency (%)	10%	65	20%	70	30%	75	40%	80	50%	82	60%	83	70%	84	80%	85	90%	86	100%	86.44
Load (%)	Efficiency (%)																									
10%	65																									
20%	70																									
30%	75																									
40%	80																									
50%	82																									
60%	83																									
70%	84																									
80%	85																									
90%	86																									
100%	86.44																									
4	INRUSH CURRENT(TYP)	48VDC/ 15 A COLD START	I/P: 48VDC O/P:FULL LOAD Ta:25°C	I =4.74A/ 48VDC																						
INPUT=48VDC @ FULL LOAD																										
																										

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~150%RATED OUTPUT POWER	I/P: 75VDC I/P: 48 VDC I/P: 18 VDC O/P:TESTING Ta:25°C	131.36%/ 75VDC 121.26%/ 48VDC 132.18%/ 18VDC PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH:17.25 V~ 20.25 V	I/P: 75VDC I/P: 48 VDC I/P: 18 VDC O/P:MIN LOAD Ta:25°C	19V/75VDC 19V/ 48VDC 18.8V/ 18VDC PROTECTION TYPE : Shut down O/P voltage,re-power on to recover

3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 75 VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode ,recovers automatically after fault condition is removed
4	INPUT REVERSE	POWER OK	I/P: 75VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 3 Rated : 150 V	I/P:High-Line +3V =78V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)full load continue Ta : 25°C	VDS: (1)124.2V (2)114.6V (3)120.2V
2	Diode Peak Voltage	Q100 Rated : 120V	I/P:High-Line +3V =78 V DC ON/OFF O/P: (1)Full Load (2)Output Short (3)full load continue Ta : 25°C	VDS: (1)88V (2)67.1V (3)88V
3	Input Capacitor Voltage	C4 Rated: : 100 μ / 80V	I/P:High-Line +3V =78 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta : :25°C	C4: (1)79.2V (2)79.5V (3)78.9V (4)78.9V
4	Control IC Voltage Test	PWM IC U1 Rated -0.3V~30V	I/P:High-Line +3V =78 V DC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta : 25°C	U1: (1) 18.8V (2) 10.5V (3) 19.2V (4) 21.8V
5	Clamp Diode Peak Voltage	D3 Rated : 400V	I/P : High-Line +3V = 78 V DC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	D3: (1)95.2V (2)95.2V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	EN 60950-1 I/P-O/P:4KVDC/min	I/P-O/P: 4.4KVDC/min Ta:25°C	I/P-O/P: 0 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P: 9999 M Ω NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	☒ EN55032 ☐ EN55011 ☐ CLASS A ☒ CLASS B	I/P:48VDC O/P:FULL LOAD Ta:25℃	☒ PASS ☐ FAIL Test by certified Lab
2	CONDUCTION	☒ EN55032 ☐ EN55011 ☐ CLASS A ☒ CLASS B	I/P:48VDC O/P:FULL LOAD Ta:25℃	☒ PASS ☐ FAIL Test by certified Lab
3	E.S.D	EN61000-4-2 ☐ Din rail Model : AIR: 8KV / Contact: 6KV	I/P:48VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
4	E.F.T	EN61000-4-4 ☐ INDUSTRY INPUT: 2KV	I/P:48VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
5	SURGE	IEC61000-4-5 ☐ INDUSTRY line-line :1KV	I/P:48VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
6	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL : DDR-15L-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 48VDC O/P : FULL LOAD Ta= 20.6 °C 2. HIGH AMBIENT BURN-IN : 1 HRS I/P : 48VDC O/P : FULL LOAD Ta= 60.5 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 20.6 °C</th><th>HIGH AMBIENT Ta= 60.5 °C</th></tr><tr><td>1</td><td>LF100</td><td>50.2°C</td><td>84.3°C</td></tr><tr><td>2</td><td>T1</td><td>56.2°C</td><td>91.0°C</td></tr><tr><td>3</td><td>LF1</td><td>45.1°C</td><td>84.0°C</td></tr><tr><td>4</td><td>Q2</td><td>34.2°C</td><td>73.4°C</td></tr><tr><td>5</td><td>Q3</td><td>68.8°C</td><td>105.1°C</td></tr><tr><td>6</td><td>Q100</td><td>51.4°C</td><td>84.3°C</td></tr><tr><td>7</td><td>U1</td><td>47.2°C</td><td>83.5°C</td></tr><tr><td>8</td><td>D3</td><td>52.9°C</td><td>93.3°C</td></tr><tr><td>9</td><td>C5</td><td>54.9°C</td><td>91.0°C</td></tr><tr><td>10</td><td>C2</td><td>43.1°C</td><td>82.4°C</td></tr><tr><td>11</td><td>C3</td><td>53.9°C</td><td>92.0°C</td></tr><tr><td>12</td><td>C7</td><td>47.7°C</td><td>83.9°C</td></tr><tr><td>13</td><td>C101</td><td>47.9°C</td><td>81.5°C</td></tr><tr><td>14</td><td>C104</td><td>36.7°C</td><td>73.0°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 20.6 °C	HIGH AMBIENT Ta= 60.5 °C	1	LF100	50.2°C	84.3°C	2	T1	56.2°C	91.0°C	3	LF1	45.1°C	84.0°C	4	Q2	34.2°C	73.4°C	5	Q3	68.8°C	105.1°C	6	Q100	51.4°C	84.3°C	7	U1	47.2°C	83.5°C	8	D3	52.9°C	93.3°C	9	C5	54.9°C	91.0°C	10	C2	43.1°C	82.4°C	11	C3	53.9°C	92.0°C	12	C7	47.7°C	83.9°C	13	C101	47.9°C	81.5°C	14	C104	36.7°C	73.0°C
NO	Position	ROOM AMBIENT Ta= 20.6 °C	HIGH AMBIENT Ta= 60.5 °C																																																													
1	LF100	50.2°C	84.3°C																																																													
2	T1	56.2°C	91.0°C																																																													
3	LF1	45.1°C	84.0°C																																																													
4	Q2	34.2°C	73.4°C																																																													
5	Q3	68.8°C	105.1°C																																																													
6	Q100	51.4°C	84.3°C																																																													
7	U1	47.2°C	83.5°C																																																													
8	D3	52.9°C	93.3°C																																																													
9	C5	54.9°C	91.0°C																																																													
10	C2	43.1°C	82.4°C																																																													
11	C3	53.9°C	92.0°C																																																													
12	C7	47.7°C	83.9°C																																																													
13	C101	47.9°C	81.5°C																																																													
14	C104	36.7°C	73.0°C																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 48 VDC O/P : 146 % LOAD Ta : 25°C	TEST : OK																																																												



15W DIN Rail type DC-DC Converter

DDR-15L series

3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 24 VDC/ 75 VDC O/P : 100 % LOAD Ta= -45 °C	TEST : OK												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 78 VDC O/P : FULL LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK												
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~60°C)	I/P : 48 VDC O/P : FULL LOAD	± 0.0031 %(0~60°C)												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST : OK												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 48VDC/Full Load DC ON/OFF TEST turn on 3sec : turn off 1sec@15cycle\ 48VDC/Full Load DC ON@1cycle		TEST : OK												
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C 2 Din Rail <table><tr><td></td><td>Displacement</td><td>Acceleration</td></tr><tr><td>2 (+3/-0) Hz up to 15Hz</td><td>± 2.5mm</td><td>-----</td></tr><tr><td>15Hz up to 50Hz</td><td>-----</td><td>2.3g</td></tr><tr><td>Sweep rate</td><td colspan="2">Max 1 Octave/minute</td></tr></table>			Displacement	Acceleration	2 (+3/-0) Hz up to 15Hz	± 2.5mm	-----	15Hz up to 50Hz	-----	2.3g	Sweep rate	Max 1 Octave/minute		TEST : OK
	Displacement	Acceleration														
2 (+3/-0) Hz up to 15Hz	± 2.5mm	-----														
15Hz up to 50Hz	-----	2.3g														
Sweep rate	Max 1 Octave/minute															
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 48VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 48VDC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 48VDC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 48VDC O/P : 50% LOAD Ta= 60 °C LIFE TIME		(1) 450113.8 HRS (2) 61585.9 HRS (3) 83613.6 HRS (4) 111812.4 HRS												
10	MTBF	Conducted by Parts Stress Analysis Prediction 907K hrs min. MIL-HDBK-217F (25°C)														
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 60°C														

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

12.10.30 A50-F031