



Test Report: DDR-240D-48

240W DIN Rail Type DC-DC Converter

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 48V~ 56V	I/P: NORMAL VOLTAGE O/P: MIN LOAD Ta: 25°C	CH1: 45.46V~57.85 V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: -1%~1 %	I/P: 67.2VDC /154VDC O/P: FULL/ MIN. LOAD Ta: 25°C	V1: -0.07 %~0.04%
3	LINE REGULATION (Max)	V1: -0.5 %~ 0.5%	I/P: 67.2VDC /154VDC O/P: FULL LOAD Ta: 25°C	V1: 0 %~ 0 %
4	LOAD REGULATION (Max)	V1: -1 %~ 1 %	I/P: 110VDC O/P: FULL ~MIN LOAD Ta: 25°C	V1: -0.07 %~0.04%
5	OVER/UNDERSHOOT TEST	< $\pm 5\%$	I/P: 110VDC O/P: FULL LOAD Ta: 25°C	TEST: 1.2%
6	RIPPLE & NOISE (Max)	V1: 100mVp-p	I/P: 110VDC O/P: FULL LOAD Ta: 25°C	V1: 31mVp-p

high frequency :

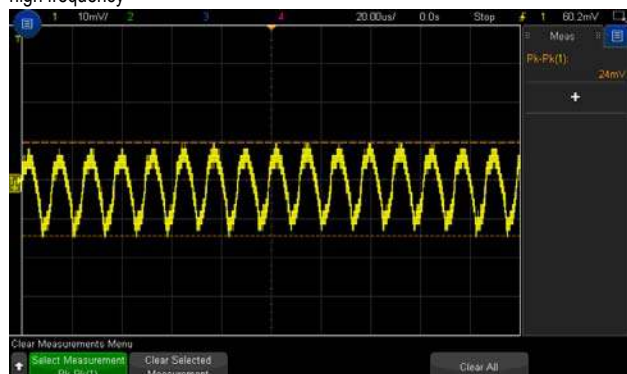

low frequency :




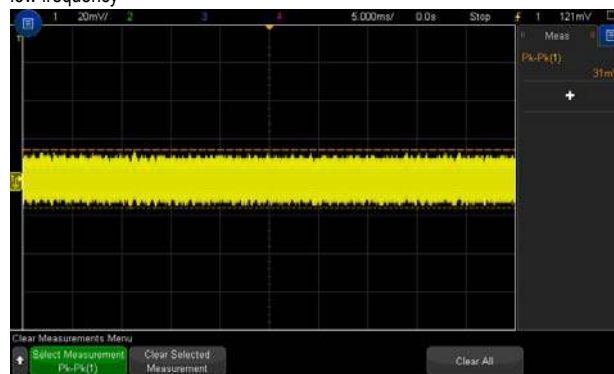


7	SET UP TIME (Max)	110VDC/ 500 ms	I/P: 110VDC O/P: FULL LOAD Ta: 25°C	110VDC/59.4 ms
---	-------------------	----------------	---	----------------


INPUT=24VDC @ FULL LOAD

CH1 : Output Voltage CH2 : DC Input Voltage

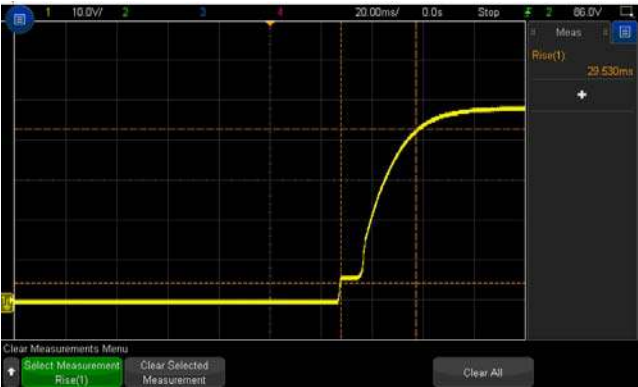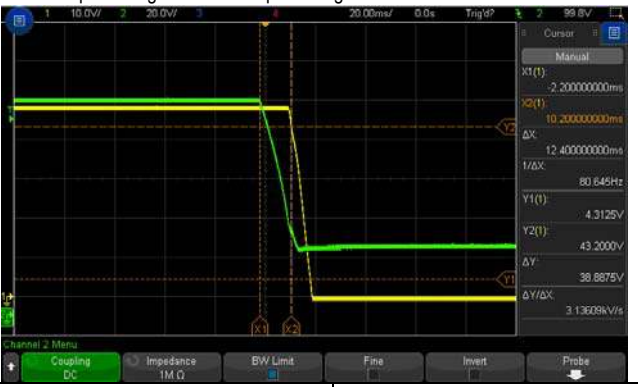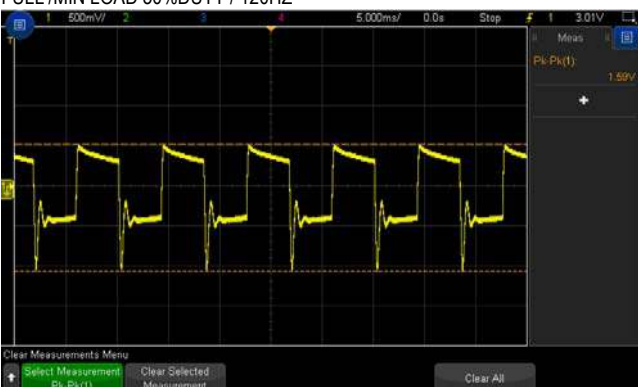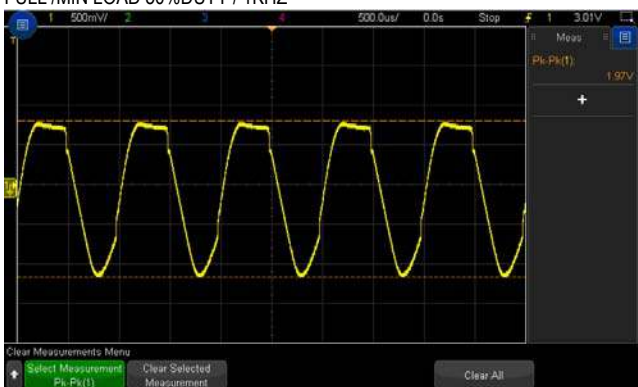

8	RISE TIME (Max)	110VDC/ 60ms	I/P: 110VDC O/P: FULL LOAD Ta: 25°C	110VDC/ 29.5 ms
INPUT=24VDC @ FULL LOAD 				
9	HOLD UP TIME (TYP)	110VDC/ 11ms	I/P: 110VDC O/P: FULL LOAD Ta: 25°C	110VDC/ 12.4 ms
INPUT=110VDC @ FULL LOAD CH1 : Output Voltage CH2 : DC Input Voltage 				
10	DYNAMIC LOAD	V1: 4800mVp-p	I/P: 110VDC O/P: (1) FULL / MIN LOAD 50% DUTY / 120HZ (2) FULL / MIN LOAD 50% DUTY / 1KHZ Ta: 25°C	1590mVp-p 1970mVp-p
FULL / MIN LOAD 50% DUTY / 120HZ 				
FULL / MIN LOAD 50% DUTY / 1KHZ 				

INPUT FUNCTION TEST

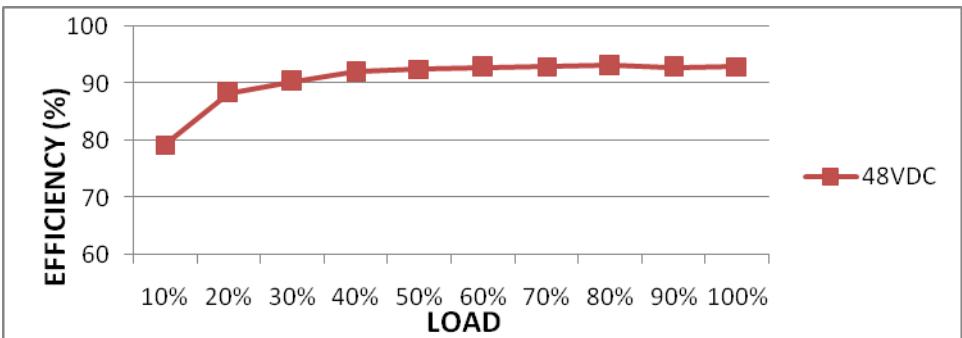NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	67.2VDC~ 154 VDC	I/P:TESTING O/P:FULL LOAD Ta:25℃	62.9V~154V
			I/P: LOW-LINE-0.2=67V HIGH-LINE+3V=157V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT CURRENT(TYP)	110VDC/2.5A	I/P:110VDC O/P:FULL LOAD Ta:25℃	I =2.34A/110VDC
3	EFFICIENCY(TYP)	92.5%	I/P: 110VDC O/P:FULL LOAD Ta:25℃	92.98 %
EFFICIENCY vs LOAD				
				
4	INRUSH CURRENT(TYP)	110VDC/50 A COLD START	I/P:110VDC O/P:FULL LOAD Ta:25℃	I =19.4A/ 110VDC
INPUT=110VDC @ FULL LOAD				
				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~135 %RATED OUTPUT POWER	I/P:154VDC I/P: 110VDC I/P: 67.2VDC O/P:TESTING Ta:25°C	125%/ 154VDC 125%/ 110VDC 125%/ 67.2VDC PROTECTION TYPE : Normally works within 150% rated output power for more than 3 seconds and then constant current protection 105~135% rated output power with auto-recovery
2	OVER VOLTAGE PROTECTION	CH:57.6V~65V	I/P:154VDC I/P: 110VDC I/P: 67.2VDC O/P:MIN LOAD Ta:25°C	59.3V/154VDC 59.3V/ 110VDC 59.7V/67.2VDC PROTECTION TYPE : Shut down O/P voltage,re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P:154VDC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : constant current protection 105~135% rated output power with auto-recovery
4	INPUT REVERSE	POWER OK	I/P: 154VDC O/P: NO LOAD Ta:25°C	NO DAMAGE

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q11 Rated : 400 V	I/P:High-Line +3V =157V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	VDS: (1)245V (2)189V (3)213V
2	Clamp MOSFET (D to S) or (C to E) Peak Voltage	Q 6 Rated : 400V	I/P:High-Line +3V =157V DC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) FULL LOAD CONTINUE Ta:25°C	VDS: (1) 249V (2) 153V (3) 205V
3	Diode Peak Voltage	D100 Rated : 400V D102 Rated : 400 V	I/P:High-Line +3V =157V DC ON/OFF O/P: (1)Full Load (2)Output Short (3) FULL LOAD CONTINUE Ta:25°C	D100: D102: (1)309V (1)353V (2)68.3V (2)281V (3)77.9V (3)357V
4	Input Capacitor Voltage	C7 Rated: : 150 μ / 160 V	I/P:High-Line +3V =157V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue Ta:25°C	(1)159V (2)159V (3)159V (4)159V

5	Control IC Voltage Test	PWM IC U1 Rated -0.3V~16V	I/P:High-Line +3V =157V DC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR 下限.LOW LINE Ta:25℃	(1) 14.5V (2) 9.2V (3) 14.5V (4) 14.1V (5) 9.6V
---	-------------------------	------------------------------	---	---

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	EN 60950-1 I/P-O/P:4KVDC/min I/P-FG:2.5 KVDC/min O/P-FG:2.5KVDC/min	I/P-O/P: 4.4KVDC/min I/P-FG: 3 KVDC/min O/P-FG:3KVDC/min Ta:25℃	I/P-O/P: 0 mA I/P-FG: 0 mA O/P-FG: 0 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P: 9999MΩ I/P-FG:9999MΩ O/P-FG:9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	EN 60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25℃	10mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	☒ EN55032 ☐ EN55011 ☐ CLASS A ☒ CLASS B	I/P:110VDC O/P:FULL LOAD Ta:25℃	☒ PASS ☐ FAIL Test by certified Lab
2	CONDUCTION	☒ EN55032 ☐ EN55011 ☐ CLASS A ☒ CLASS B	I/P:110VDC O/P:FULL LOAD Ta:25℃	☒ PASS ☐ FAIL Test by certified Lab
3	E.S.D	EN61000-4-2 ☐ Din rail Model : AIR: 8KV / Contact: 6KV	I/P:110VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
4	E.F.T	EN61000-4-4 ☐ INDUSTRY INPUT: 2KV	I/P: 110VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
5	SURGE	IEC61000-4-5 ☐ INDUSTRY L-N :1KV L,N-FG:2KV	I/P: 110VDC O/P:FULL LOAD Ta:25℃	☒ CRITERIA A ☐ CRITERIA B
6	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL : DDR-240D-48 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 110VDC O/P : FULL LOAD Ta= 28.1 °C 2. HIGH AMBIENT BURN-IN : 1 HRS I/P : 110VDC O/P : FULL LOAD Ta= 50.0 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 28.1 °C</th><th>HIGH AMBIENT Ta= 50.0 °C</th></tr><tr><td>1</td><td>LF1</td><td>61.6°C</td><td>84.3°C</td></tr><tr><td>2</td><td>Q3</td><td>61.1°C</td><td>84.2°C</td></tr><tr><td>3</td><td>LF100</td><td>69.3°C</td><td>92.9°C</td></tr><tr><td>4</td><td>LF2</td><td>54.9°C</td><td>77.8°C</td></tr><tr><td>5</td><td>T1</td><td>80.3°C</td><td>106.3°C</td></tr><tr><td>6</td><td>L100</td><td>78.6°C</td><td>103.0°C</td></tr><tr><td>7</td><td>D100</td><td>85.4°C</td><td>109.2°C</td></tr><tr><td>8</td><td>D105</td><td>84.4°C</td><td>108.1°C</td></tr><tr><td>9</td><td>C103</td><td>69.7°C</td><td>93.6°C</td></tr><tr><td>10</td><td>C104</td><td>66.0°C</td><td>89.8°C</td></tr><tr><td>11</td><td>C106</td><td>66.6°C</td><td>89.6°C</td></tr><tr><td>12</td><td>Q12</td><td>63.3°C</td><td>87.9°C</td></tr><tr><td>13</td><td>U1</td><td>28.5°C</td><td>50.1°C</td></tr><tr><td>14</td><td>TSW1</td><td>71.9°C</td><td>95.8°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 28.1 °C	HIGH AMBIENT Ta= 50.0 °C	1	LF1	61.6°C	84.3°C	2	Q3	61.1°C	84.2°C	3	LF100	69.3°C	92.9°C	4	LF2	54.9°C	77.8°C	5	T1	80.3°C	106.3°C	6	L100	78.6°C	103.0°C	7	D100	85.4°C	109.2°C	8	D105	84.4°C	108.1°C	9	C103	69.7°C	93.6°C	10	C104	66.0°C	89.8°C	11	C106	66.6°C	89.6°C	12	Q12	63.3°C	87.9°C	13	U1	28.5°C	50.1°C	14	TSW1	71.9°C	95.8°C
NO	Position	ROOM AMBIENT Ta= 28.1 °C	HIGH AMBIENT Ta= 50.0 °C																																																													
1	LF1	61.6°C	84.3°C																																																													
2	Q3	61.1°C	84.2°C																																																													
3	LF100	69.3°C	92.9°C																																																													
4	LF2	54.9°C	77.8°C																																																													
5	T1	80.3°C	106.3°C																																																													
6	L100	78.6°C	103.0°C																																																													
7	D100	85.4°C	109.2°C																																																													
8	D105	84.4°C	108.1°C																																																													
9	C103	69.7°C	93.6°C																																																													
10	C104	66.0°C	89.8°C																																																													
11	C106	66.6°C	89.6°C																																																													
12	Q12	63.3°C	87.9°C																																																													
13	U1	28.5°C	50.1°C																																																													
14	TSW1	71.9°C	95.8°C																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 110 VDC O/P : 124 % LOAD Ta : 25°C	TEST : OK																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 86.4 VDC/ 154 VDC O/P : 100 % LOAD Ta= -43 °C	TEST : OK																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 157 VDC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %(0~55°C)	I/P : 110 VDC O/P : FULL LOAD	± 0.0038 %(0~50°C)																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC		TEST : OK																																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 110VDC/Full Load DC ON/OFF TEST turn on 3sec : turn off 1sec@15cycle\ 110VDC/Full Load DC ON@1cycle		TEST : OK																																																												

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25℃ 2 Din Rail <table><tr><td></td><td>Displacement</td><td>Acceleration</td></tr><tr><td>2 (+3/-0) Hz up to 15Hz</td><td>± 2.5mm</td><td>-----</td></tr><tr><td>15Hz up to 50Hz</td><td>-----</td><td>2.3g</td></tr><tr><td>Sweep rate</td><td colspan="2">Max 1 Octave/minute</td></tr></table>		Displacement	Acceleration	2 (+3/-0) Hz up to 15Hz	± 2.5mm	-----	15Hz up to 50Hz	-----	2.3g	Sweep rate	Max 1 Octave/minute		TEST : OK
	Displacement	Acceleration													
2 (+3/-0) Hz up to 15Hz	± 2.5mm	-----													
15Hz up to 50Hz	-----	2.3g													
Sweep rate	Max 1 Octave/minute														
9	CAPACITOR LIFE CYCLE	SUPPOSE C103 IS THE MOST CRITICAL COMPONENT (1) I/P : 110VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 110VDC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 110VDC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 110VDC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 578411.4 HRS (2) 89035.8 HRS (3) 156633.4 HRS (4) 252276.5 HRS												
10	MTBF	Conducted by Parts Stress Analysis Prediction 484.9K hrs min. Telcordia SR-332 (Bellcore) ; 189.9K hrs min. MIL-HDBK-217F (25℃)													
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50℃													

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

12.10.30 A50-F031