



Test Report: NPB-240-24

240W Compact Size and Wide Output Range Charger

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

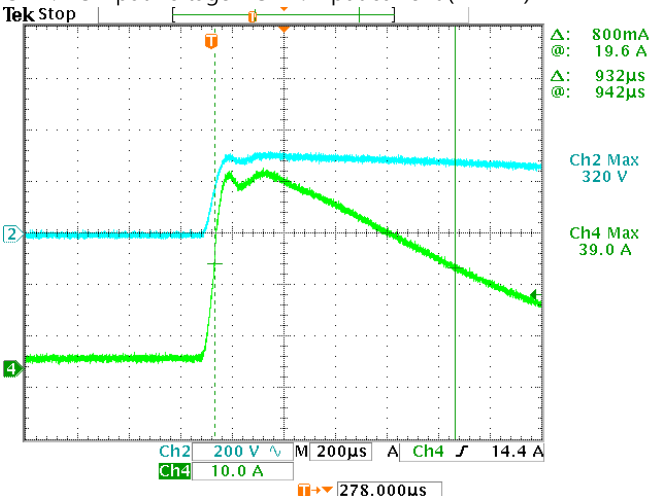
■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BOOST CHARGE VOLTAGE	28.8V± 0.3 V	I/P: 230 VAC O/P: 90% LOAD Ta:25°C	28.864V
2	FLOAT CHARGE VOLTAGE	27.6V± 0.3 V	I/P: 230 VAC O/P:NO LOAD Ta:25°C	27.752V
3	OUTPUT CURRENT	8A±3%	I/P: 230 VAC O/P:C.V MODE-1V Ta:25°C	8.043A
4	LEAKAGE CURRENT FROM BATTERY (TYP)	<1mA	I/P: AC OFF O/P:BAT. LOAD Ta:25°C	0.081mA
5	CHARGE VOLTAGE RANGE	21~30.4V	I/P: 230 VAC O/P: 90% LOAD Ta:25°C	19.043V~32.419V
6	CURRENT ADJUSTABLE RANGE	50%~100%	I/P: 230 VAC O/P:C.V MODE-1V Ta:25°C	42.63%~106.5%

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	90VAC~264VAC 127VDC~370VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 76.58V~264V (2) 105.6Vdc~370Vdc/FULL LOAD 105.6Vdc~370Vdc/50% LOAD (3) 105.7Vdc~370Vdc/FULL LOAD 105.7 Vdc~370Vdc/50% LOAD
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%= 300 V O/P:BAT. LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (TYP)	230 V/ 1.5 A 115 V/ 3 A	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	I =1.133A/ 230VAC I =2.245A/ 115VAC

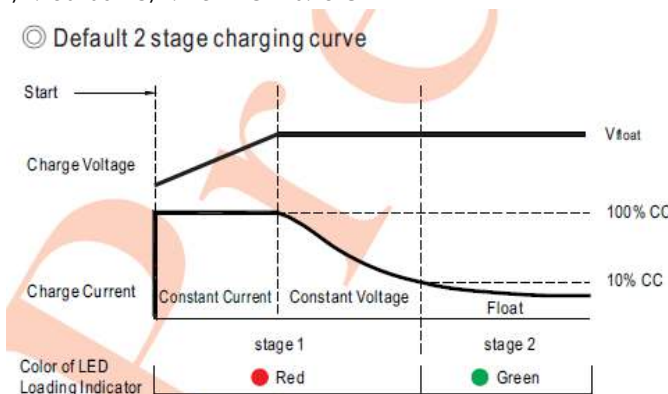
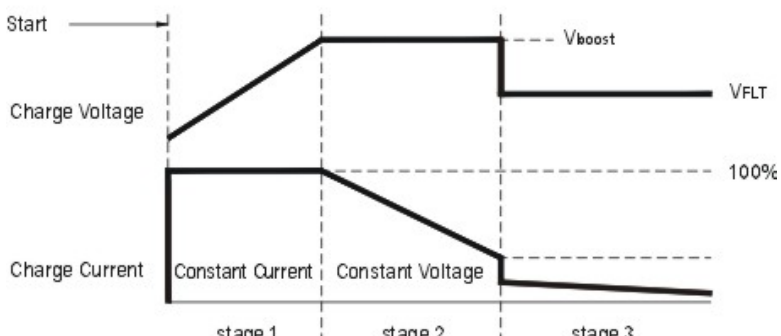
4	POWER FACTOR (TYP)	0.95/ 230 VAC 0.98/ 115 VAC	I/P: 230 VAC I/P: 115 VAC O/P:BAT. LOAD Ta:25°C	0.964/ 230 VAC 0.989/ 115 VAC
5	EFFICIENCY (TYP)	92%	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	93.38%
6	INRUSH CURRENT (TYP)	230 V/ 50 A COLD START	I/P: 230 VAC O/P:BAT. LOAD Ta:25°C	I =39.0A
INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)  Ch2 Max 320 V Ch4 Max 39.0 A Δ: 800mA @: 19.6 A Δ: 932μs @: 942μs Ch2 200 V ~ M 200μs A Ch4 14.4 A Ch4 10.0 A 278.000μs				
7	GAIN-PHASE MARGIN TEST 1.	GAIN MARGIN < -10dB PHASE MARGIN > =60 <u>Gain Curve slope:</u> <u>-10dB/dec~-40dB/dec</u>	(1) CV MODE(Vmax)/264Vac (2) CV MODE(Vmax)/90Vac (3) CV MODE(Min)/264Vac (4) CV MODE(Min)/90Vac Ta:25°C	(1) 89.6 ° / -15.2 dB / -29dB/dec (2) 91 ° / dB / -12.4 -28.8dB/dec (3) 117.9 ° / -11.9 dB / -10.9dB/dec (4) 118 ° / -11 dB / -14.5dB/dec
8	NO LOAD POWER CONSUMPTION	230V/0.15W	I/P: 230 VAC O/P:NO LOAD (AC S.W OFF) Ta:25°C	0.118 W

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	CH1: 32 ~ 40V PROTECTION RESULT Shut down and latch off o/p voltage, re-power on to recover	I/P: 264 VAC I/P: 90 VAC O/P:TESTING Ta:25°C	36.9V/ 264VAC 36.9V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover

2	OVER TEMPERATURE PROTECTION	SPEC: NO DAMAGE Hiccup, recovers automatically after temperature goes down	I/P: 264 VAC I/P: 90 VAC O/P: BAT. LOAD	O.T.P. Active PROTECTION TYPE : Hiccup, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Constant current limiting, charger will shut down after 5 sec, re-power on to recover	I/P: 264 VAC O/P: NO LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
4	BATTERY REVERSE POLARITY	By internal fuse open	I/P: 230 VAC O/P: BAT. LOAD Ta:25°C	By internal fuse open
5	ERROR INPUT HIGH VOLTAGE BATTERY	BATTERY VOLTAGE : ≤ 36V NO DAMAGE	I/P: 230 VAC O/P: BAT. LOAD Ta:25°C	NO DAMAGE

CONTROL FUNCTION TEST

N O	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																		
1	CHARGE CURE	I/P:230Vac O/P:TESTING Ta:25°C ◎ Default 2 stage charging curve  <table><tr><td rowspan="3"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr><tr><td>Specification</td><td>Result</td><td>Specification</td><td>Result</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table> 3 Stage 										Specification	Result	Specification	Result							
	Specification	Result	Specification	Result																		

			輸入電圧	出力電圧	出力電流	
			△ ()	△	△	
2.	LED INDICATOR	LED		Description		TEST : <u>OK</u>
		Green		FLOATING/FULLY		
		Red		Charging (stage 1 or stage 2)		
		Light off		OVP /OLP/OUTPUT SHORT		
		Green Flash		OTP		
I/P: 230V O/P:TESTING LOAD Ta:25°C						

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q 5/Q6 Rated : 600 V / 13A	AC ON/OFF I/P:High-Line +3V = 267 V VDS : O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	Q5 VDS : (1) 407V (2) 411V (3) 387V (4) 452V	Q6 VDS : (1) 411V (2) 408V (3) 395V (4) 456V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated : 600V / 18A	AC ON/OFF I/P:High-Line +3V = 267 V VDS : O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	Q1 VDS : (1) 443V (2) 443V (3) 411V (4) 435V	
3	P.F.C DIODE	D 4 Rated : 6A/ 650V	AC ON/OFF I/P:High-Line +3V =267 V O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	(1) 467V (2) 471V (3) 443V (4) 447V	
4	Transistor Peak Voltage	Q210/Q211 Rated : 100V / 75A -	AC ON/OFF I/P:Low-Line -3V = 267 V O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	Q210 VDS : (1) 70.2V (2) 59.7V (3) 68.5V (4) 76.0V	Q211 VDS : (1) 72.7V (2) 59.1V (3) 71.1V (4) 76.8V
5	Input Capacitor Voltage	C 5 Rated : 150 u / 420 V	I/P:High-Line +3V =267 V O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	(1) 410V (2) 406V (3) 402V (4) 406V	

6	Control IC Voltage Test	PWM IC U1 Rated 10V~20V	AC ON/OFF I/P:High-Line +3V =267 V O/P: (1)CV(max) (2)CV(min) (3)no load (4)OUTPUT SHORT Ta:25°C	U1	U102
		PFC IC U2 Rated 9.75V~20V		(1) 15.9V (2) 15.9V (3) 15.9V (4) 15.9V	(1) 12.7V (2) 12.5V (3) 12.7V (4) 12.7V
		O/P IC U102 Rated 3V~30V		U2 (1) 15.3V (2) 15.3V (3) 15.3V (4) 15.3V	

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3 KVAC I/P-FG:2 KVAC O/P-FG:0.5KVAC	I/P-O/P: 3.6 KVAC I/P-FG: 1.8 KVAC O/P-FG: 0.6 KVAC Ta:25°C	I/P-O/P: 2.611 mA I/P-FG: 2.546 mA O/P-FG: 1.896 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 10G Ω I/P-FG: 10 GΩ O/P-FG 10G Ω NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) EN/EN55014-1 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	■ PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32) EN/EN55014-1 CLASS B	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 AIR : 8KV / Contact : 4KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ CRITERIA A □ CRITERIA B
5	E.F.T	BS EN/EN61000-4-4 INPUT: 1KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ CRITERIA A □ CRITERIA B
6	SURGE	BS EN/EN 61000-4-5 L-N :1KV L,N-PE:2KV	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	■ CRITERIA A □ CRITERIA B
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																																																												
1	TEMPERATURE RISE TEST	MODEL : NPB-240-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 21.3 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 45.8 °C																																																																																																																																														
		<table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 21.3 °C</th><th>HIGH AMBIENT Ta= 45.8 °C</th></tr><tr><td>1</td><td>ZNR1</td><td>49.0°C</td><td>76.8°C</td></tr><tr><td>2</td><td>LF1</td><td>46.6°C</td><td>74.0°C</td></tr><tr><td>3</td><td>RTH1</td><td>52.4°C</td><td>79.9°C</td></tr><tr><td>4</td><td>RY1</td><td>63.4°C</td><td>90.4°C</td></tr><tr><td>5</td><td>LF2</td><td>55.6°C</td><td>84.3°C</td></tr><tr><td>6</td><td>C2</td><td>54.3°C</td><td>82.4°C</td></tr><tr><td>7</td><td>LF3</td><td>54.2°C</td><td>81.8°C</td></tr><tr><td>8</td><td>RTH2</td><td>64.8°C</td><td>92.8°C</td></tr><tr><td>9</td><td>C5</td><td>61.8°C</td><td>90.3°C</td></tr><tr><td>10</td><td>L1</td><td>62.6°C</td><td>91.5°C</td></tr><tr><td>11</td><td>BD1</td><td>49.7°C</td><td>85.0°C</td></tr><tr><td>12</td><td>C6</td><td>54.4°C</td><td>81.0°C</td></tr><tr><td>13</td><td>U1</td><td>64.6°C</td><td>93.1°C</td></tr><tr><td>14</td><td>U2</td><td>57.7°C</td><td>88.9°C</td></tr><tr><td>15</td><td>Q2</td><td>55.0°C</td><td>81.8°C</td></tr><tr><td>16</td><td>D4</td><td>54.1°C</td><td>80.6°C</td></tr><tr><td>17</td><td>Q5</td><td>54.2°C</td><td>81.4°C</td></tr><tr><td>18</td><td>Q15</td><td>69.7°C</td><td>101.6°C</td></tr><tr><td>19</td><td>C14</td><td>62.8°C</td><td>89.6°C</td></tr><tr><td>20</td><td>T1coil</td><td>63.7°C</td><td>91.3°C</td></tr><tr><td>21</td><td>T1core</td><td>63.8°C</td><td>91.8°C</td></tr><tr><td>25</td><td>Q210</td><td>54.2°C</td><td>81.7°C</td></tr><tr><td>26</td><td>U100</td><td>69.7°C</td><td>98.4°C</td></tr><tr><td>24</td><td>Q215</td><td>54.6°C</td><td>81.9°C</td></tr><tr><td>25</td><td>C102</td><td>73.8°C</td><td>101.7°C</td></tr><tr><td>26</td><td>C101</td><td>73.2°C</td><td>101.3°C</td></tr><tr><td>27</td><td>LF100</td><td>59.4°C</td><td>87.5°C</td></tr><tr><td>28</td><td>U110</td><td>55.2°C</td><td>82.3°C</td></tr><tr><td>29</td><td>Q201</td><td>57.8°C</td><td>84.5°C</td></tr><tr><td>30</td><td>J102</td><td>73.5°C</td><td>101.0°C</td></tr><tr><td>31</td><td>PCB</td><td>56.9°C</td><td>83.3°C</td></tr><tr><td>32</td><td>D104</td><td>61.4°C</td><td>88.9°C</td></tr><tr><td>33</td><td>R105</td><td>61.0°C</td><td>88.8°C</td></tr><tr><td>34</td><td>R10</td><td>57.5°C</td><td>85.0°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 21.3 °C	HIGH AMBIENT Ta= 45.8 °C	1	ZNR1	49.0°C	76.8°C	2	LF1	46.6°C	74.0°C	3	RTH1	52.4°C	79.9°C	4	RY1	63.4°C	90.4°C	5	LF2	55.6°C	84.3°C	6	C2	54.3°C	82.4°C	7	LF3	54.2°C	81.8°C	8	RTH2	64.8°C	92.8°C	9	C5	61.8°C	90.3°C	10	L1	62.6°C	91.5°C	11	BD1	49.7°C	85.0°C	12	C6	54.4°C	81.0°C	13	U1	64.6°C	93.1°C	14	U2	57.7°C	88.9°C	15	Q2	55.0°C	81.8°C	16	D4	54.1°C	80.6°C	17	Q5	54.2°C	81.4°C	18	Q15	69.7°C	101.6°C	19	C14	62.8°C	89.6°C	20	T1coil	63.7°C	91.3°C	21	T1core	63.8°C	91.8°C	25	Q210	54.2°C	81.7°C	26	U100	69.7°C	98.4°C	24	Q215	54.6°C	81.9°C	25	C102	73.8°C	101.7°C	26	C101	73.2°C	101.3°C	27	LF100	59.4°C	87.5°C	28	U110	55.2°C	82.3°C	29	Q201	57.8°C	84.5°C	30	J102	73.5°C	101.0°C	31	PCB	56.9°C	83.3°C	32	D104	61.4°C	88.9°C	33	R105	61.0°C	88.8°C	34	R10	57.5°C	85.0°C
NO	Position	ROOM AMBIENT Ta= 21.3 °C	HIGH AMBIENT Ta= 45.8 °C																																																																																																																																													
1	ZNR1	49.0°C	76.8°C																																																																																																																																													
2	LF1	46.6°C	74.0°C																																																																																																																																													
3	RTH1	52.4°C	79.9°C																																																																																																																																													
4	RY1	63.4°C	90.4°C																																																																																																																																													
5	LF2	55.6°C	84.3°C																																																																																																																																													
6	C2	54.3°C	82.4°C																																																																																																																																													
7	LF3	54.2°C	81.8°C																																																																																																																																													
8	RTH2	64.8°C	92.8°C																																																																																																																																													
9	C5	61.8°C	90.3°C																																																																																																																																													
10	L1	62.6°C	91.5°C																																																																																																																																													
11	BD1	49.7°C	85.0°C																																																																																																																																													
12	C6	54.4°C	81.0°C																																																																																																																																													
13	U1	64.6°C	93.1°C																																																																																																																																													
14	U2	57.7°C	88.9°C																																																																																																																																													
15	Q2	55.0°C	81.8°C																																																																																																																																													
16	D4	54.1°C	80.6°C																																																																																																																																													
17	Q5	54.2°C	81.4°C																																																																																																																																													
18	Q15	69.7°C	101.6°C																																																																																																																																													
19	C14	62.8°C	89.6°C																																																																																																																																													
20	T1coil	63.7°C	91.3°C																																																																																																																																													
21	T1core	63.8°C	91.8°C																																																																																																																																													
25	Q210	54.2°C	81.7°C																																																																																																																																													
26	U100	69.7°C	98.4°C																																																																																																																																													
24	Q215	54.6°C	81.9°C																																																																																																																																													
25	C102	73.8°C	101.7°C																																																																																																																																													
26	C101	73.2°C	101.3°C																																																																																																																																													
27	LF100	59.4°C	87.5°C																																																																																																																																													
28	U110	55.2°C	82.3°C																																																																																																																																													
29	Q201	57.8°C	84.5°C																																																																																																																																													
30	J102	73.5°C	101.0°C																																																																																																																																													
31	PCB	56.9°C	83.3°C																																																																																																																																													
32	D104	61.4°C	88.9°C																																																																																																																																													
33	R105	61.0°C	88.8°C																																																																																																																																													
34	R10	57.5°C	85.0°C																																																																																																																																													

2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : CV-1 Ta= -35°C	TEST : OK
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 45°C HUMIDITY= 95 %R.H	TEST : OK
4	TEMPERATURE COEFFICIENT	± 0.05 %/ (0°C~45°C)	I/P : 230 VAC O/P : FULL LOAD	±0.0073 %/°C(0~45°C)
5	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10CYCLE 5. Input/Output condition : STATIC	
6	THERMAL SHOCK TEST	-30~45°C	1. Thermal shock Temperature : -35°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
7	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
8	CAPACITOR LIFE CYCLE	SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45 °C LIFE TIME	(1) 172678.2HRS (2) 27895.1HRS (3) 85100HRS (4) 188752.1HRS	
9	MTBF	Conducted by Parts Stress Analysis Prediction 428.3K hrs min. Telcordia TR/SR-332 (Bellcore) ; 157.5K hrs min. MIL-HDBK-217F (25°C)		
10	Ongoing Reliability Test	I/P : 230VAC O/P : 80% LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2020.10.01 TAG-QA-009