

"OF" SERIES ORIENTABLE FAN

Description: **Axial fan a.c.**



Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Storage temperature:

Rated temperature range:

Electrical connection:

Lifetime L10 at 25°C:

Weight:

Approvals:

die-casting aluminum black painted fan,
galvanized steel bracket

glass filled polyester UL 94V-0

IP20, according to EN 60529 standard

by No 2 screws (steel bracket fixing holes
Ø 6mm, 100mm hole centers)

impedance

from -40°C to +70°C

from -10°C to +70°C

by 3 poles terminal L-N-PE cage clamp:

1.5 ÷ 2.5mm² (15 ÷ 13 AWG) solid wire

0.5 ÷ 2.5mm² (20 ÷ 13 AWG) rigid wire


0.75 ÷ 2.5mm² (18 ÷ 13 AWG) tin plated wire

50,000h

1kg

CE

Technical drawing

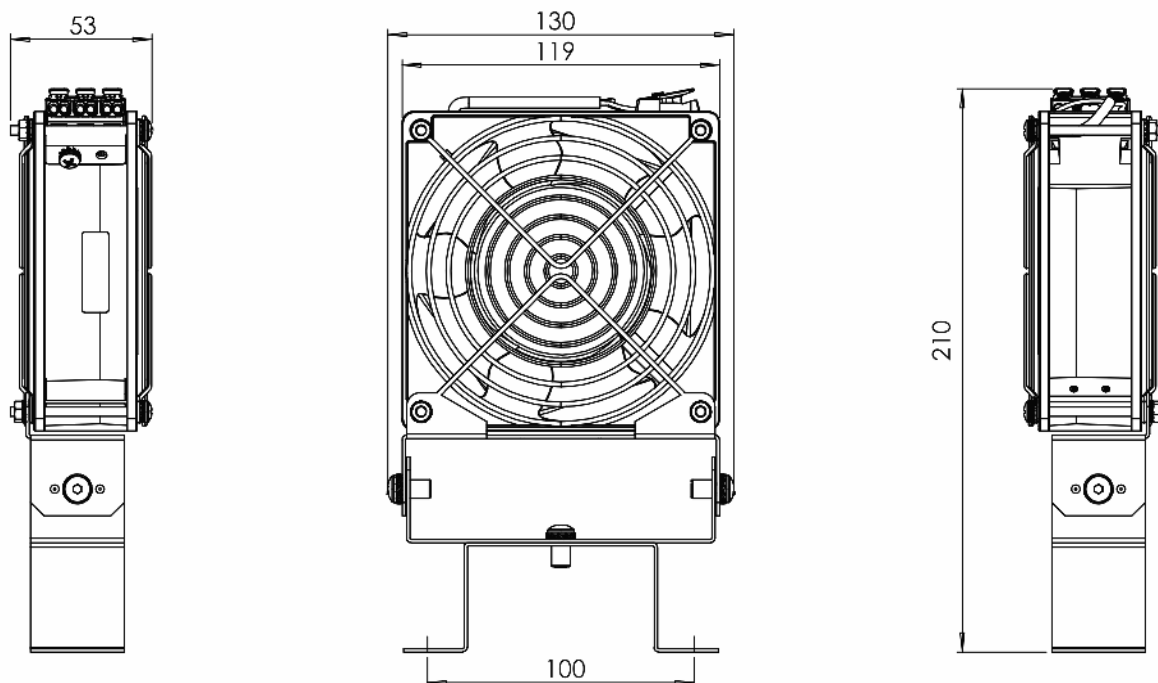

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
OF-A12B23SWBAQ130	Ball	230 V a.c.	50/60	0.170/0.130	21/21	163/182	60/62	46.4/48.1	2,400/2,600	CE

data with uncertainty of 15%