T22U230B

standard with fan

> CONTACT US



T series roof exhaust units represents an optimal solution for heat dissipation through the top of electrical cabinets. They are ideal for indoor use where there is limited space on the front and side panels. According to the ambient conditions these units can operated with fan (forced air) or without a fan (natural air convection).

Technical data			
APPROVALS			
Approvals	CE		
PERFORMANCE			
Max Airflow	800/850	m³/h	
	471/500	CFM	
Airflow with Exhaust Filter	660/700	m³/h	
	388/412	CFM	
Max Static Pressure	435/548	Pa	
	1.75/2.20	in H2O	
ELECTRICAL DATA			
Rated Voltage	230	V a.c.	
Rated Current	0.56/0.7	А	
Rated Power	125/161	W	
Operating Voltage	207÷253	V a.c.	
Frequency	50/60	Hz	
Appliance Class	I		
Motor Protection	Thermally Protected		
GENERIC DATA			
RAL Number	7035		
Electrical Connection	Wires		
Life Expectancy	70000	h at 25 °C	
	70000	h at 77 °F	



> CONTACT US


T22U230B standard with fan


Technical data			
Wires Section	1	mm²	
Fan Noise	75.2/76.7	dB(A)	
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP23		
Operating Temperature	-20÷60	°C	
	-4÷140	°F	
Storage Temperature	-30÷70	°C	
	-22÷158	°F	



> CONTACT US

T22U230B standard with fan

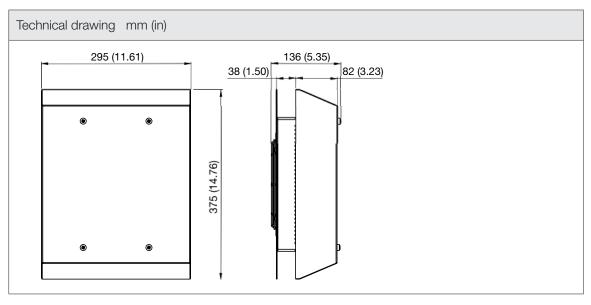

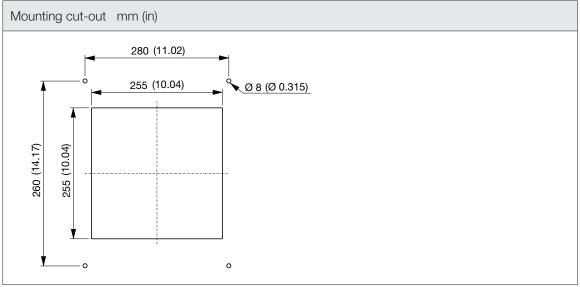



> CONTACT US

T22U230B

standard with fan

