



Test Report: NTS-1700-248

1700W High Reliable True Sine Wave DC-AC Power Inverter

- **DESIGN VERIFY TEST**

- Output Function Test

- Input Function Test

- Protection Function Test

- Control Function Test

- APPLICATION Test

- Component Stress Test

- **SAFETY & E.M.C. TEST**

- Safety Test

- E.M.C. Test

- **RELIABILITY TEST**

- ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED POWER	1700W	IP: 48VDC Ta:25°C	<u>1734</u> W
2	MAXIMUM OUTPUT POWER (TYP)	(1)2000W/180sec. (2)2550w/10sec (3)SURGE POWER 3400W FOR 30CYCLE Vin (30 ± 5 CYCLE)	IP: 50VDC OP:TESTING LOAD Ta:25°C	(1) <u>228.2</u> V / <u>8.55</u> A / <u>180.1</u> Sec (2) <u>227.7</u> V / <u>11.2</u> A / <u>10.07</u> Sec (3) <u>227.9</u> V / <u>14.73</u> A / <u>29</u> Cycle

CH3:O/P VAC CH4:O/P IAC

Fig1

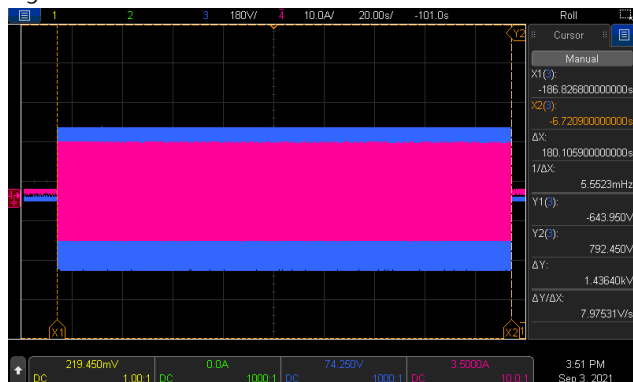


Fig2


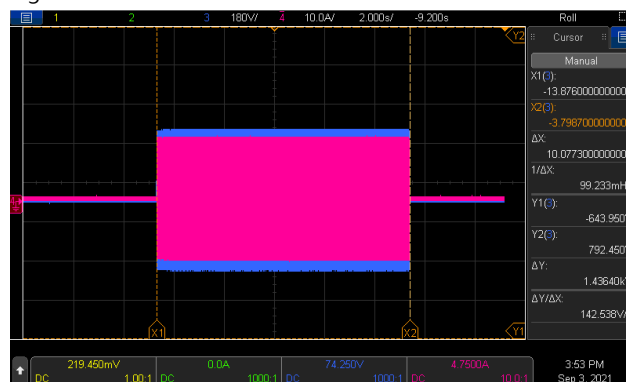


Fig3

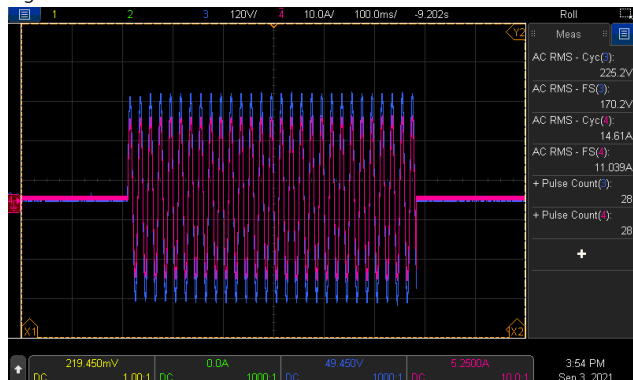

3	AC Voltage	200 / 220 / 230 / 240Vac selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25°C	DIP S.W 200VAC: <u>198.4</u> V DIP S.W 220VAC: <u>218.5</u> V DIP S.W 230VAC: <u>228.5</u> V DIP S.W 240VAC: <u>238.6</u> V
4	FREQUENCY	50/60Hz (±0.1HZ) selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25°C	DIP S.W 50HZ: <u>50.038</u> HZ DIP S.W 60HZ: <u>59.958</u> HZ
5	WAVEFORM	True sine wave (THD<3%)	IP: 50VDC OP: 1350W (1) Vo(min) (2) Vo(nor) (3) Vo(max) Ta:25°C	(1) <u>1.24</u> % / Vo(min) /1350W (2) <u>1.22</u> % / Vo(nor) /1350W (3) <u>1.27</u> % / Vo(max) /1350W

CH3:O/P VAC CH4:O/P IAC

Fig1

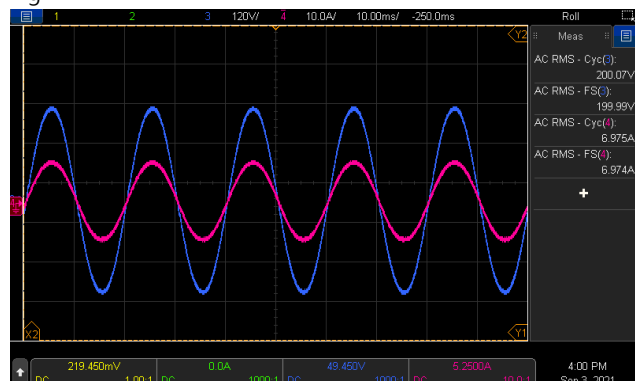


Fig2


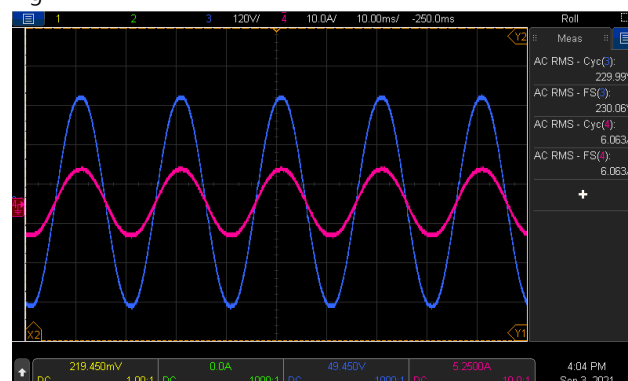


Fig3

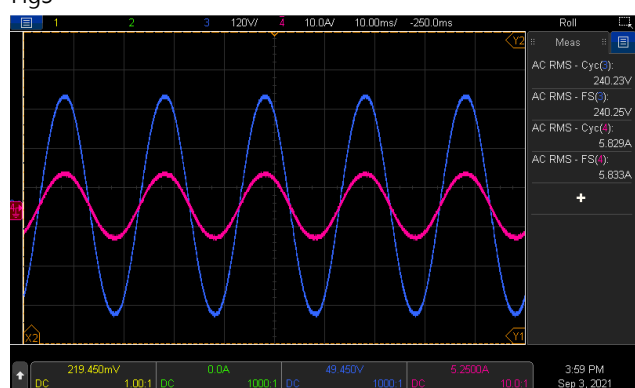

6	AC REGULATION	±3%	IP: 50VDC OP: 1350W Ta:25°C	<u> -0.54 </u> %
7	Overshoot /Undershoot	<±10%	IP: 48VDC OP: (1) full load turn on (2) no load turn on (3) full /no load change Ta:25°C	(1) <u> -3.8 </u> % (2) <u> -0.4 </u> % (3) <u> -2.9 </u> %
8	O/P voltage DC offset	Vin(nor)= <u> 48 </u> V · Vo<200mV · no load : <u> 75.2 </u> mV / full load: <u> 77.9 </u> mV		

9	LED STATUS	Status test <table> <tr> <th>LED</th><th>Status</th><th>RESULT</th></tr> <tr> <td>Green ●</td><td>Inverter OK</td><td>OK</td></tr> <tr> <td>Orange ●</td><td>Remote off</td><td>OK</td></tr> <tr> <td>Orange ☀</td><td>No AC Output at Saving mode</td><td>OK</td></tr> <tr> <td>Red ●</td><td>Inverter Fail</td><td>OK</td></tr> </table> Battery test <table> <tr> <th>LED</th><th>Battery RANGE</th><th>RESULT</th></tr> <tr> <td>Green ●</td><td>50.0~62.0 Vdc±1V</td><td>50.12Vdc ~ 62.05Vdc</td></tr> <tr> <td>Orange ●</td><td>44.0~50.0Vdc ±1V</td><td>44.07Vdc ~ 50.08Vdc</td></tr> <tr> <td>Red ●</td><td><44.0 Vdc ±1V > 62.0Vdc±1V</td><td>< 43.93 Vdc > 61.96 Vdc</td></tr> </table> Load test <table> <tr> <th>LED</th><th>LOAD RANGE</th><th>RESULT</th></tr> <tr> <td>Green ●</td><td>Min. load ~ 40%±5% LOAD</td><td>Min. load ~ 41.5%</td></tr> <tr> <td>Orange ●</td><td>40%±5% ~ 80%±5% LOAD</td><td>41.8% ~ 80.6%</td></tr> <tr> <td>Red ●</td><td>≥ 80%±5% LOAD</td><td>≥ 81.8%</td></tr> </table>	LED	Status	RESULT	Green ●	Inverter OK	OK	Orange ●	Remote off	OK	Orange ☀	No AC Output at Saving mode	OK	Red ●	Inverter Fail	OK	LED	Battery RANGE	RESULT	Green ●	50.0~62.0 Vdc±1V	50.12Vdc ~ 62.05Vdc	Orange ●	44.0~50.0Vdc ±1V	44.07Vdc ~ 50.08Vdc	Red ●	<44.0 Vdc ±1V > 62.0Vdc±1V	< 43.93 Vdc > 61.96 Vdc	LED	LOAD RANGE	RESULT	Green ●	Min. load ~ 40%±5% LOAD	Min. load ~ 41.5%	Orange ●	40%±5% ~ 80%±5% LOAD	41.8% ~ 80.6%	Red ●	≥ 80%±5% LOAD	≥ 81.8%
LED	Status	RESULT																																							
Green ●	Inverter OK	OK																																							
Orange ●	Remote off	OK																																							
Orange ☀	No AC Output at Saving mode	OK																																							
Red ●	Inverter Fail	OK																																							
LED	Battery RANGE	RESULT																																							
Green ●	50.0~62.0 Vdc±1V	50.12Vdc ~ 62.05Vdc																																							
Orange ●	44.0~50.0Vdc ±1V	44.07Vdc ~ 50.08Vdc																																							
Red ●	<44.0 Vdc ±1V > 62.0Vdc±1V	< 43.93 Vdc > 61.96 Vdc																																							
LED	LOAD RANGE	RESULT																																							
Green ●	Min. load ~ 40%±5% LOAD	Min. load ~ 41.5%																																							
Orange ●	40%±5% ~ 80%±5% LOAD	41.8% ~ 80.6%																																							
Red ●	≥ 80%±5% LOAD	≥ 81.8%																																							

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	VOLTAGE RANGE (TYP)	40VDC~66VDC	IP: TESTING OP:NO LOAD/FULL LOAD Ta:25°C I/P: LOW-LINE=42V HIGH-LINE=65V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON:30Sec/OFF:30Sec 10MIN (POWER ON/OFF NO DAMAGE) I/P: 48V O/P:FULL LOAD ON:30ec OFF:30ec 12Hr (POWER ON/OFF NO DAMAGE)	<u>40.2 VDC ~ 65.9 VDC</u> /NO LOAD <u>40.2 VDC ~ 65.9 VDC</u> /FULL LOAD 10MIN Test: <u>OK</u> 12Hr Test: <u>OK</u>
2	DC CURRENT (TYP)	42.5A	IP: 48VDC OP:FULL LOAD Ta:25°C	<u>38.0</u> A



3	NO LOAD DISSIPATION	$\leq 1.5\text{W}$ @standby saving mode $\leq 29\text{W}$ @NON-Saving Mode	IP: 48VDC OP: NO LOAD Ta:25°C	<u>1.42</u> W @standby saving mode <u>26.7</u> W @NON-Saving Mode
4	SAVING MODE TO NORMAL	$P_o \geq 25\text{W}$	IP: 48VDC OP: TESTING LOAD Ta:25°C	$\geq$ <u>21</u> W
5	NORMAL TO SAVING MODE	$P_o \leq 10\text{W}$	IP: 48VDC OP: TESTING LOAD Ta:25°C	$\leq$ <u>13</u> W
6	OFF MODE CURRENT DRAW (Typ.)	$\leq 1\text{mA}$	IP: 48VDC OP: Sw off Ta:25°C	<u>0.67</u> mA
7	EFFICIENCY(TYP)	1350W/93%	IP:50VDC OP: $P_o=1350\text{W}$ 230V/50HZ Ta:25°C	<u>94.8</u> %

PROTECTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BAT LOW ALARM	44V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>44.1</u> V
2	BAT LOW SHUT DOWN	40V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>40.1</u> V
3	BAT LOW RESTART	50V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>50.1</u> V
4	BAT HIGH ALARM	62V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>62.1</u> V
5	BAT HIGH SHUT DOWN	66V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>66.1</u> V
6	BAT HIGH RESTART	60V $\pm$ 1VDC	IP: TESTING OP: FULL LOAD SW: ON Ta:25°C	<u>59.9</u> V
7	BAT. POLARITY	By internal fuse open	IP: BAT +/- OP: FULL LOAD Ta:25°C	TEST: <u>OK</u>

8	OVER TEMPERATURE	Shut down o/p voltage: re-power on to recover	IP: HI LINE/LOW-LINE OP: FULL LOAD SW:ON Ta:25°C	Shut down o/p voltage, re-power on to recover
9	OUTPUT SHORT	Shut down o/p voltage: re-power on	IP: 48VDC O/P: FULL LOAD SW:ON Ta:25°C	Shut down o/p voltage, re-power on to recover LED DISPLAY: <u>OK</u>
10	OVER LOAD (typ.)	105%~115%LOAD 180sec 115%~150%LOAD 10 sec Shut down o/p voltage, re-power on to recover	IP: 48VDC OP: TESTING SW:ON Ta:25°C	(1). <u>106.0% ~ 114.7 %</u> <u>180.1</u> sec (2). <u>118.0% ~ 147.6 %</u> <u>10.1</u> sec Shut down o/p voltage, re-power on to recover

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE CONTROL	(1).Power ON-OFF remote control by front panel dry contact connector (by RELAY) Open : Normal work Short : Remote off (2).IRC3	IP: 48VDC OP: FULL LOAD Ta:25°C	(1).Open : <u>Normal work</u> Short : <u>Remote off</u> (1).TEST: Vo= <u>26mV</u> , Pin= <u>5.76 W</u> (2).TEST: <u>OK</u>

APPLICATION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	LAMP	LAMP: <u>1005</u> W · turn on <u>OK</u> LAMP: <u>1505</u> W · turn on <u>OK</u> LAMP: <u>1991</u> W · turn on <u>OK</u>	1. Vin=HIGH LINE 2. 230V/50Hz	TEST: <u>OK</u>
2	INDUCTION MOTOR	<u>0.22</u> HP	1. Vin=HIGH LINE 2. 230V/50Hz	TEST: <u>OK</u>
3	SWITCHING POWER SUPPLY	WITH PFC: <u>RSP-1600-48</u> O/P= <u>1715</u> W NO PFC: <u>SE-1000-48</u> O/P= <u>727</u> W	1. Vin=HIGH LINE 2. 230V/50Hz 1. Vin=HIGH LINE 2. 230V/50Hz	TEST: <u>OK</u> TEST: <u>OK</u>

COMPONENT WEAFORM TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	DC TO DC Power Transistor (D to S) or (C to E) Peak Voltage	Q101/ Q114 Rated: 200V / 65 A	I/P: high line O/P:V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On (5) Saving mode (6) bat=OVP full load	Q101 (1) 167V (2) 166V (3) 166V (4) 167V (5) 166V (6) 166V (7) 118.4V	Q114 (1) 154V (2) 154V (3) 156V (4) 158V (5) 158V (6) 161V (7) 117.6V

			(7) bat=UVP full load Ta:25°C		
2	DC TO DC Diode Peak Voltage	D 151 Rated : 1000V/16A	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On (5) Saving mode (6) bat=OVP full load (7) bat=UVP full load Ta:25°C	(1) 555V (2) 601V (3) 553V (4) 557V (5) 553V (6) 562V (7) 547V	
3	DC BUS Capacitor Voltage	C161 /C162 Rated : 1000 u/ 315V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On (5) Saving mode (6) bat=OVP full load (7) bat=UVP full load Ta:25°C	C161 (1) 262V (2) 285V (3) 266V (4) 264V (5) 258V (6) 274V (7) 270V	C162 (1) 264V (2) 281V (3) 262V (4) 264V (5) 266V (6) 256V (7) 252V
4	DC TO AC Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated : 650 V/ 50 A	I/P: high line O/P:V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On (5) Saving mode (6) bat=OVP full load (7) bat=UVP full load Ta:25°C	(1) 581V (2) 609V (3) 581V (4) 573V (5) 581V (6) 581V (7) 592V	
5	AUX PWM MOS	Q201 Rated : 65 A/ 200 V Q501 Rated : 65A/ 200V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On (5) Saving mode (6) bat=OVP full load (7) bat=UVP full load Ta:25°C	Q201 (1) 184V (2) 184V (3) 184V (4) 184V (5) 184V (6) 155V (7) 121V	Q501 (1) 154V (2) 154V (3) 154V (4) 154V (5) 154V (6) 68V (7) 40V
6	Control IC Voltage Test	MCU IC U301 Rated 2.4 V~ 3.6 V AUX IC U201 Rated 8.2V~30V	I/P: high line O/P: V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(3400W) Turn On (4) NO LOAD Turn On	U301 (1) 3.298V (2) 3.297V (3) 3.297V (4) 3.297V (5) 3.298V	U501 (1) 12.5V (2) 12.5V (3) 12.5V (4) 12.5V (5) 12.6V



		CHARGE IC U501 Rated -0.3V~20V	(5) Saving mode (6) bat=OVP full load (7) bat=UVP full load Ta:25°C	(6) 3.298V (7) 11.56V	(6) 12.05V (7) 12.05V
		Gate Driver IC U81 Rated -0.3V~20V		U201 (1) 12.3V (2) 12.2V (3) 12.3V (4) 12.3V (5) 12.3V (6) 11.64V (7) 11.56V	U81 (1) 5.08V (2) 5.06V (3) 5.08V (4) 5.08V (5) 5.08V (6) 5.05V (7) 5.01V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	BAT I/P-AC O/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BAT I/P-AC O/P 3.6 KVAC/min AC O/P-FG:1.8 KVAC/min Ta:25°C	BAT I/P-AC O/P: 8.62 mA AC O/P-FG: 5.98 mA NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	EN55032 CISPR32 (except for Type-UN) CLASS A	I/P:48 VDC O/P: :FULL/50% LOAD Ta:25°C	CLASS A
2	E.S.D	EN61000-4-2 AIR : 8KV / Contact : 4KV	I/P: 48VDC O/P:FULL LOAD Ta:25°C	PASS
3	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : NTU-1700-248		
		1. ROOM AMBIENT BURN-IN : 2 HRS		
		I/P : 50VDC O/P : FULL LOAD Ta= 26.4 °C		
		2. HIGH AMBIENT BURN-IN : 2 HRS		
		I/P : 50VDC O/P : FULL LOAD Ta= 37.5 °C		
NO	Position	ROOM AMBIENT Ta=26.4°C	HIGH AMBIENT Ta=37.5°C	
1	LF1	34.1°C	45.8°C	
2	ZNR1	27.7°C	38.7°C	
3	C2	43.0°C	55.9°C	

		NO	Position	ROOM AMBIENT Ta=26.4°C	HIGH AMBIENT Ta=37.5°C
		4	C1	28.7°C	39.9°C
		5	RY2	38.0°C	49.6°C
		6	R213	53.9°C	65.2°C
		7	R25	53.6°C	64.1°C
		8	R11	62.1°C	72.0°C
		9	U201	50.0°C	54.1°C
		10	U81	35.8°C	47.1°C
		11	C50	27.9°C	38.8°C
		12	Q1	69.4°C	82.2°C
		13	TSW3	44.8°C	57.9°C
		14	L10	49.6°C	63.2°C
		15	LF2	27.2°C	38.0°C
		16	CC54	28.9°C	40.8°C
		17	C162	40.4°C	53.1°C
		18	D154	43.8°C	55.3°C
		19	D156	46.4°C	57.9°C
		20	L1	40.1°C	52.3°C
		21	C107	51.0°C	63.1°C
		22	C103	46.9°C	59.6°C
		23	T101coil	74.3°C	87.0°C
		24	T101coil	75.5°C	87.4°C
		25	T101core	63.5°C	71.7°C
		26	Q110	48.8°C	61.6°C
		27	Q114	50.2°C	62.7°C
		28	T501	33.4°C	45.1°C
		29	Q102	45.4°C	57.8°C
		30	Q106	47.4°C	60.5°C
		31	U132	39.4°C	51.0°C
		32	Q4	63.2°C	75.2°C
		33	TSW2	52.1°C	64.0°C
		34	T202	47.9°C	59.5°C
		35	Q201	47.9°C	59.7°C
		36	U301	39.7°C	51.0°C
		37	U361	38.8°C	50.2°C
		38	Q501	33.3°C	44.7°C
		39	D261	49.3°C	60.2°C
		40	RTH6	45.0°C	57.3°C
		41	R131	61.3°C	72.8°C
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 50VDC O/P : 100%LOAD Ta= -30 °C	TEST : OK
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 35 °C NO DAMAGE		I/P : 66VDC O/P : FULL LOAD Ta= 34.8 °C HUMIDITY= 95 %R.H	TEST : OK

4	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	TEST : OK
5	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ +40°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:48V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:48V/ FULL LOAD Burn In Test	TEST : OK
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 4G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
7	CAPACITOR LIFE CYCLE	SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 50VDC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 50VDC O/P : FULL LOAD Ta= 35 °C LIFE TIME	(1) 681898.2HRS (2) 318116.8HRS
8	MTBF	Conducted by Parts Stress Analysis Prediction 421.9K hrs min. Telcordia TR/SR-332 (Bellcore) ; 45.3K hrs min. MIL-HDBK-217F (25°C)	
9	Ongoing Reliability Test	I/P : 50VDC O/P : 80% LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Liutt		Wangdz

2020.10.1 TAG-QA-009