



Test Report: LRS-100-36

100W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

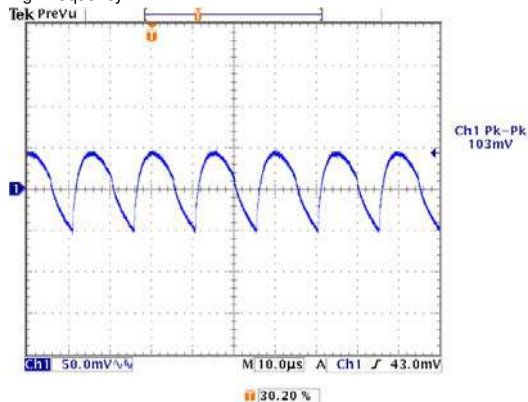
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 32.4 V~ 39.6 V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	31.299V~40.888V/230VAC 31.298V~40.882V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1 %~ 1 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.013 %~ 0.013%
3	LINE REGULATION (Max)	V1: 0.5 %~ 0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1:-0%~0%
4	LOAD REGULATION(Max)	V1: -0.5 %~0.5%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0 %~ 0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 110mVp-p

high frequency :




low frequency :

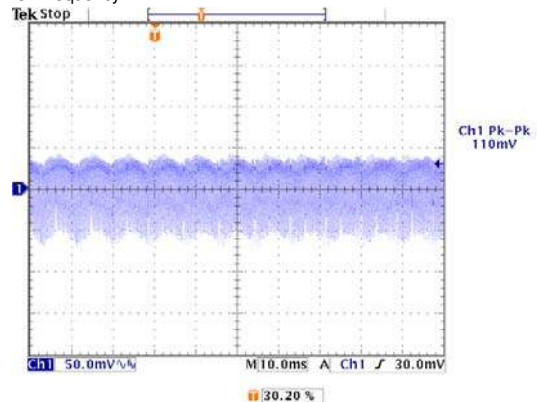

7	SET UP TIME(Max)	230VAC/500ms 115VAC/ 500ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 238ms 115VAC/ 236ms
---	------------------	-------------------------------	--	--------------------------------


INPUT=230VAC/50HZ @ FULL LOAD






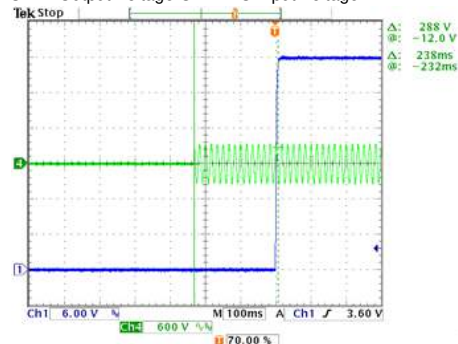
CH1 : Output Voltage CH4 : AC Input Voltage




INPUT=115VAC/60HZ @ FULL LOAD

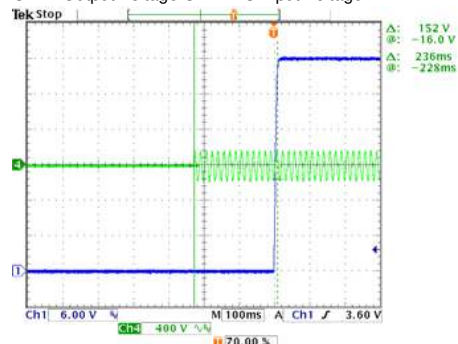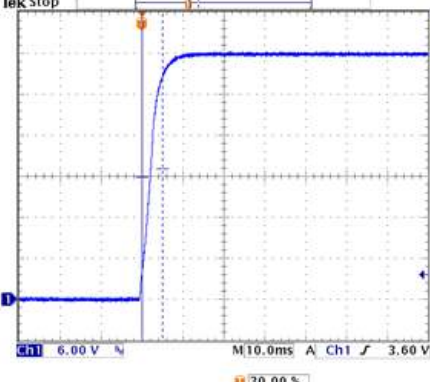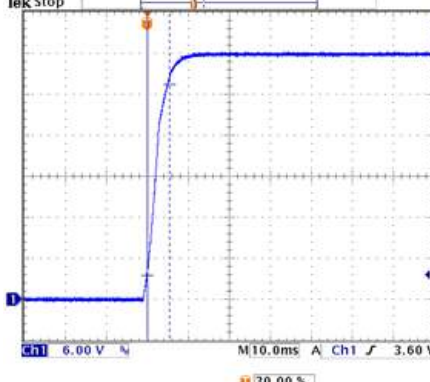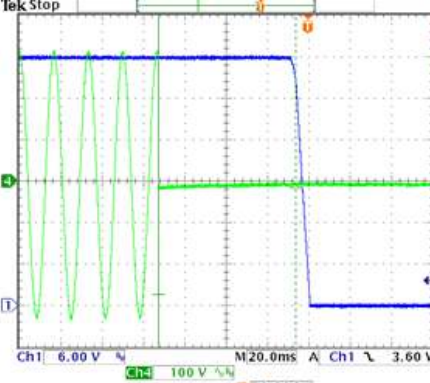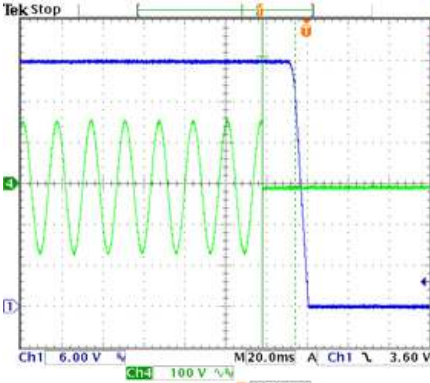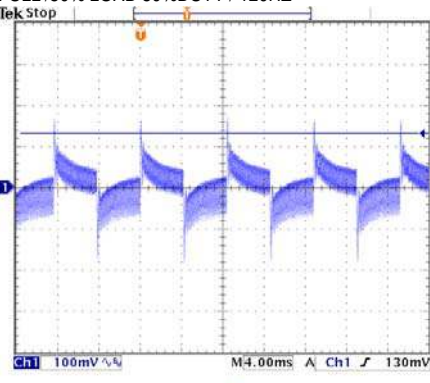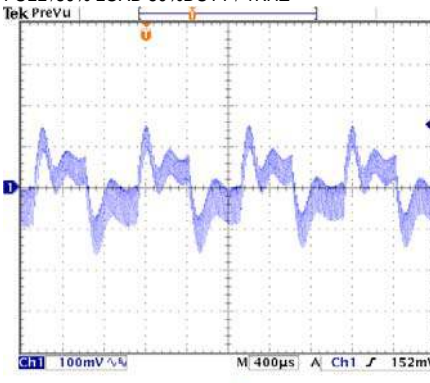CH1 : Output Voltage CH4 : AC Input Voltage




8	RISE TIME (Max)	230VAC/ 30ms 115VAC/ 30ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/5.00ms 115VAC/5.40ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 			
9	HOLD UP TIME(Typ)	230VAC/ 55ms 115VAC/ 10ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 66.4ms 115VAC/ 16.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage 			
	INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH4 : AC Input Voltage 			
10	DYNAMIC LOAD	V1: 3600 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	352mVp-p 314mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ 			
	FULL /50% LOAD 50%DUTY / 1KHZ 			

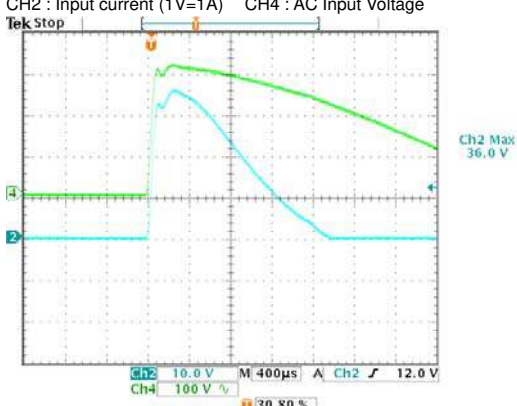INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	74V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 1.2A 115V/ 1.9A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =1.00A/ 230VAC I =1.68A/ 115VAC
4	LEAKAGE CURRENT	< 0.75 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.325mA N-FG: 0.312mA
5	NO LOAD CONSUMPTION	< 0.3 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	<0.153 W <0.232 W
6	INRUSH CURRENT(Typ)	230V/50A COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I =36.0A/ 230VAC
INPUT=230VAC/50HZ @ FULL LOAD CH2 : Input current (1V=1A) CH4 : AC Input Voltage  Ch2 Max: 36.0 V 30.80 %				
7	EFFICIENCY(Typ)	90.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	90.74%

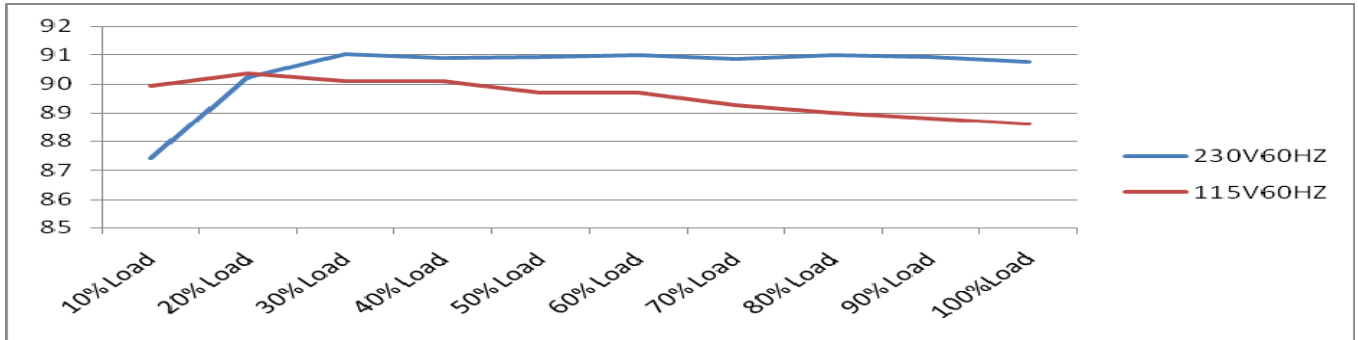EFFICIENCY vs LOAD



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110%~ 150%	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25℃	130%/ 230VAC 129.6%/115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	CH:41.4V~48.6V	I/P: 230VAC I/P: 115VAC O/P: MIN LOAD Ta:25℃	47.60%/ 230VAC 47.59 %/115VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25℃	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 11 A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25℃	(1)460V (2)556V (3)544V (4)532V (5)536V (6)548V (7)460V
2	Diode Peak Voltage	Q101 Rated 20 A/ 300V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25℃	Q101: (1)266V (2)282V (3)280V (4)280V (5)276V (6)280V (7)292V (8)238V
3	Input Capacitor Voltage	C5 Rated: 150 μ /400V 105℃	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25℃	(1)366V (2)368V (3)368V
4	Control IC Voltage Test	PWM IC U1 Rated 28 V(MAX) 9.5V(MIN.	I/P:High-Line +3V =267 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25℃	(1) 18.6V (2) 16V (3) 17.8V (4) 22.2V (5) 14.5V
5	Clamp Diode Peak Voltage	D 5 Rated: 800 V 2 A	I/P: High-Line +3V = 267 V AC ON/OFF O/P: (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta: 25℃	(1) 460V (2) 452V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25℃	I/P-O/P:2.235mA I/P-FG:1.865mA O/P-FG:0.809m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25℃	I/P-O/P: >99999MΩ I/P-FG: >99999 MΩ O/P-FG: >99999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25℃	3mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P: FULL LOAD Ta:25℃	PASS
2	CONDUCTION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL/50% LOAD Ta: 25℃	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25℃	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25℃	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25℃	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25℃	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL: LRS-100-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=18.6℃ 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=51.9℃ <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 18.6 ℃</th><th>HIGH AMBIENT Ta=51.9 ℃</th></tr><tr><td>1</td><td>U1</td><td>46.2℃</td><td>79.1℃</td></tr><tr><td>2</td><td>D30</td><td>48.2℃</td><td>81.1℃</td></tr><tr><td>3</td><td>LF1</td><td>44.3℃</td><td>78.5℃</td></tr><tr><td>4</td><td>BD1</td><td>51.1℃</td><td>83.7℃</td></tr><tr><td>5</td><td>C5</td><td>42.7℃</td><td>74.2℃</td></tr><tr><td>6</td><td>D5</td><td>52.2℃</td><td>86.6℃</td></tr><tr><td>7</td><td>Q1</td><td>51.6℃</td><td>86.6℃</td></tr><tr><td>8</td><td>R15</td><td>51.7℃</td><td>86.1℃</td></tr><tr><td>9</td><td>C35</td><td>43.0℃</td><td>76.2℃</td></tr><tr><td>10</td><td>T1coil</td><td>56.3℃</td><td>89.4℃</td></tr><tr><td>11</td><td>T1coil</td><td>60.9℃</td><td>93.7℃</td></tr><tr><td>12</td><td>C105</td><td>46.1℃</td><td>78.9℃</td></tr><tr><td>13</td><td>Q101</td><td>62.5℃</td><td>94.6℃</td></tr><tr><td>14</td><td>L100</td><td>39.0℃</td><td>72.1℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 18.6 ℃	HIGH AMBIENT Ta=51.9 ℃	1	U1	46.2℃	79.1℃	2	D30	48.2℃	81.1℃	3	LF1	44.3℃	78.5℃	4	BD1	51.1℃	83.7℃	5	C5	42.7℃	74.2℃	6	D5	52.2℃	86.6℃	7	Q1	51.6℃	86.6℃	8	R15	51.7℃	86.1℃	9	C35	43.0℃	76.2℃	10	T1coil	56.3℃	89.4℃	11	T1coil	60.9℃	93.7℃	12	C105	46.1℃	78.9℃	13	Q101	62.5℃	94.6℃	14	L100	39.0℃	72.1℃
NO	Position	ROOM AMBIENT Ta= 18.6 ℃	HIGH AMBIENT Ta=51.9 ℃																																																													
1	U1	46.2℃	79.1℃																																																													
2	D30	48.2℃	81.1℃																																																													
3	LF1	44.3℃	78.5℃																																																													
4	BD1	51.1℃	83.7℃																																																													
5	C5	42.7℃	74.2℃																																																													
6	D5	52.2℃	86.6℃																																																													
7	Q1	51.6℃	86.6℃																																																													
8	R15	51.7℃	86.1℃																																																													
9	C35	43.0℃	76.2℃																																																													
10	T1coil	56.3℃	89.4℃																																																													
11	T1coil	60.9℃	93.7℃																																																													
12	C105	46.1℃	78.9℃																																																													
13	Q101	62.5℃	94.6℃																																																													
14	L100	39.0℃	72.1℃																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 124 % LOAD Ta: 25℃	TEST: OK																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 % LOAD Ta= -30 ℃	TEST: OK																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 ℃ HUMIDITY= 95 %R.H	TEST: OK																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃ (0~50℃)	I/P: 230 VAC O/P: FULL LOAD	0%/℃ (0~40℃)																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30℃~ 70℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																												



100W Single Output Switching Power Supply

LRS-100series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25℃	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta=50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME	(1) 396481HRS (2) 72523HRS (3) 104095HRS (4) 156612HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 720.6KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50℃	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014