



Test Report: LRS-35-48

35W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

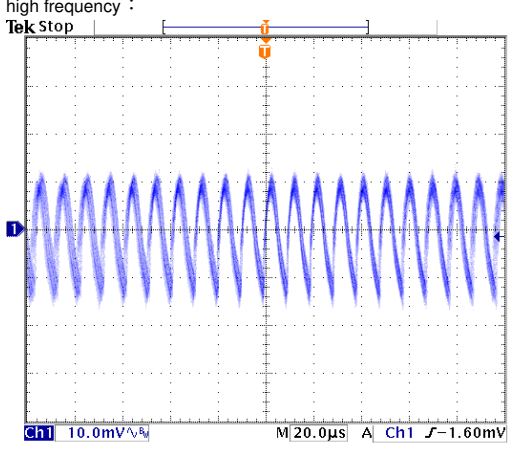
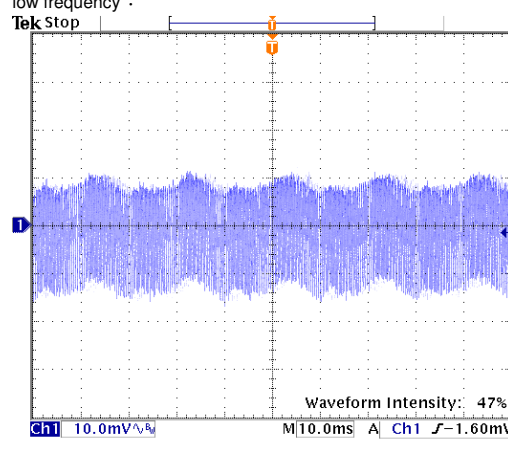
E.M.C. Test

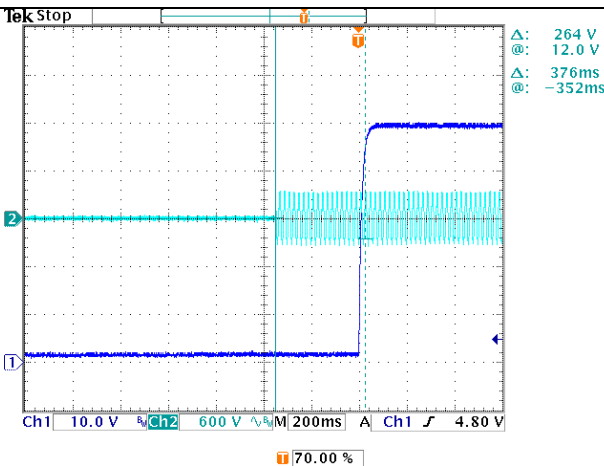
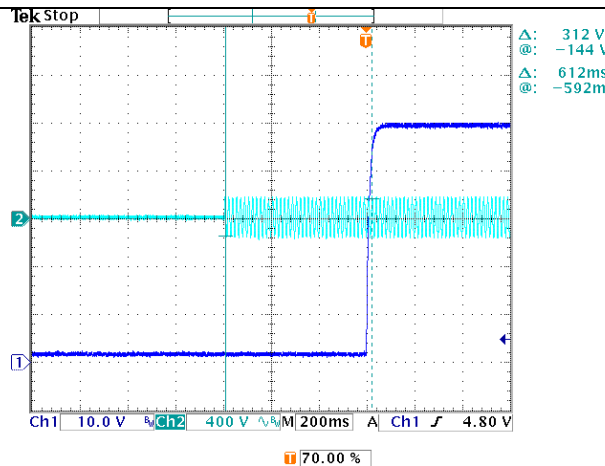
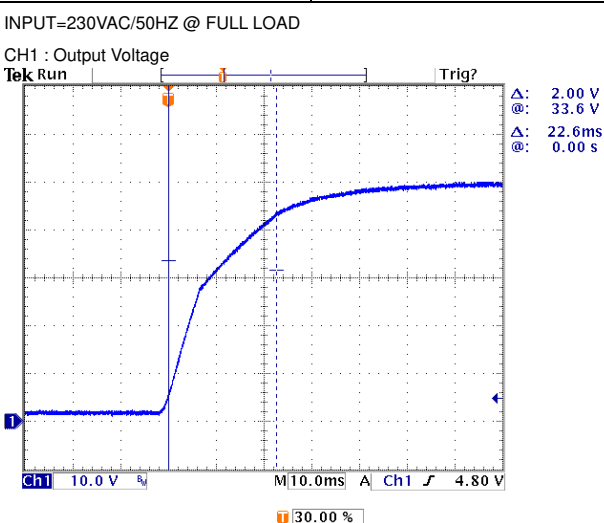
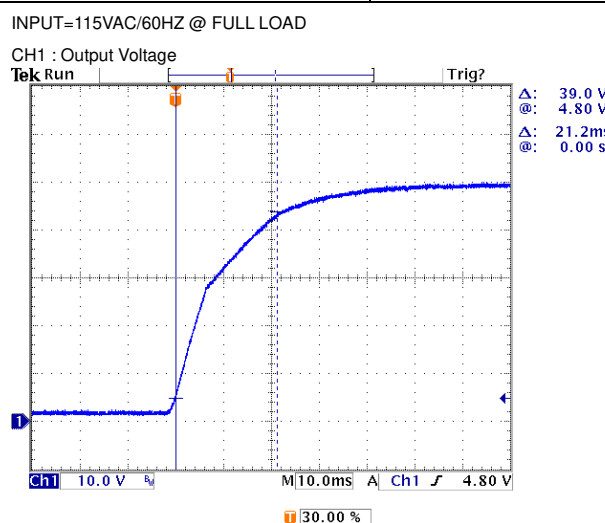
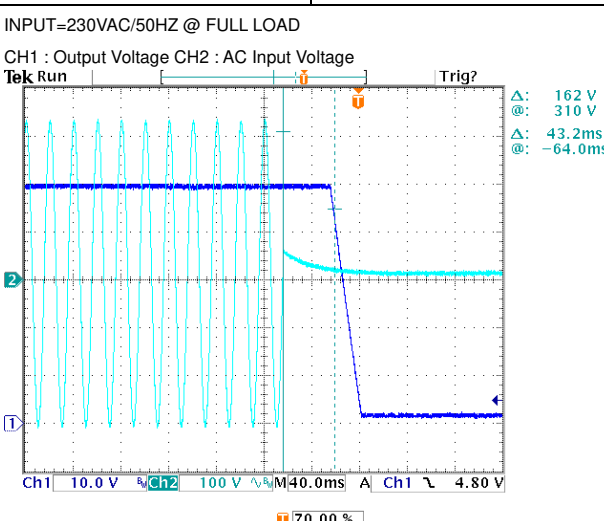
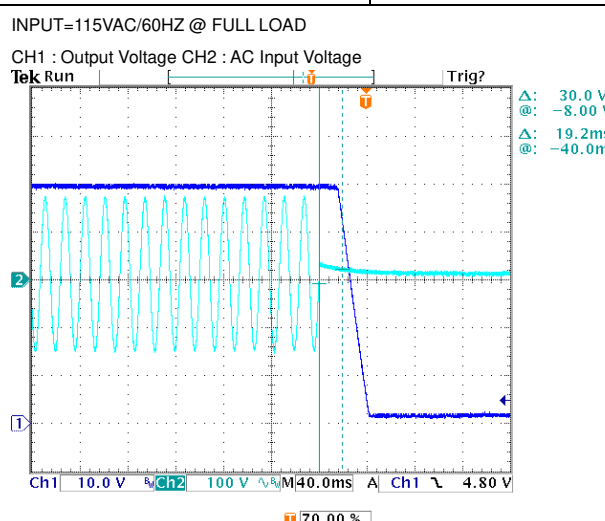
■ RELIABILITY TEST

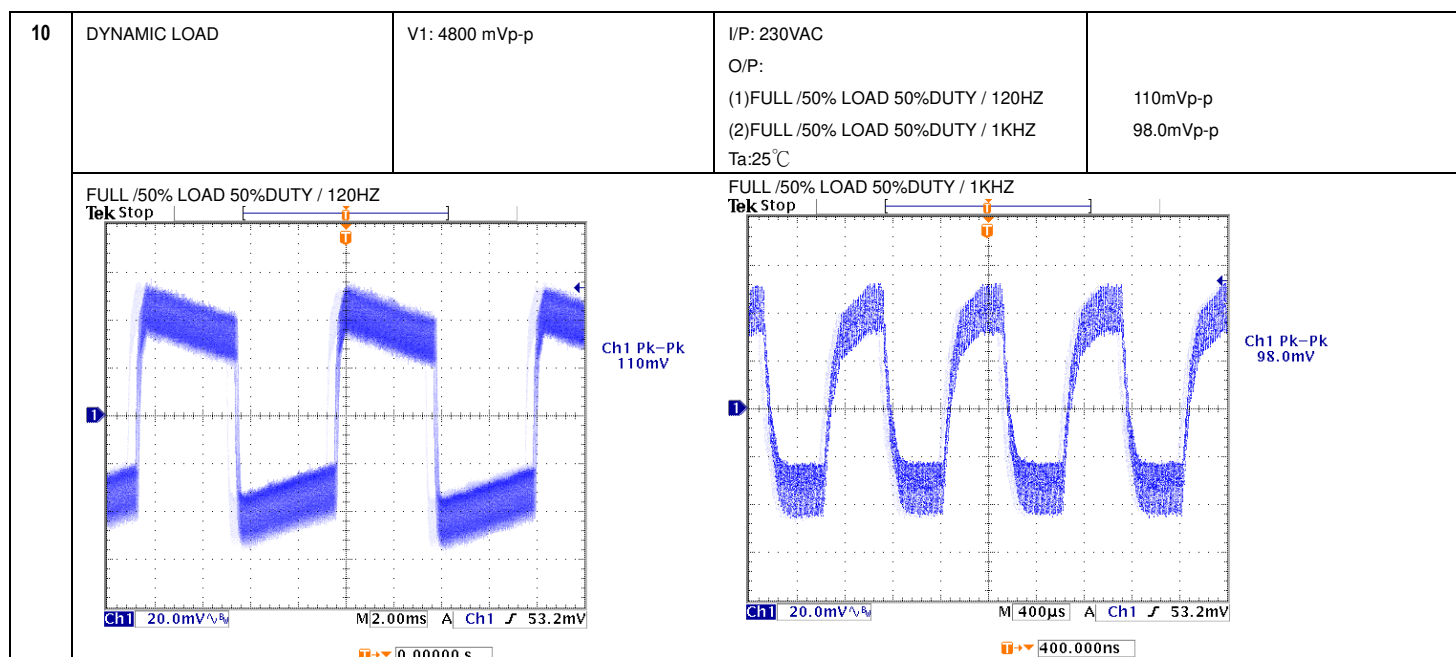
ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1:43.2V~ 52.8 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	41.77V~55.36V/230VAC 41.77V~55.36V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1 %~ -1 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: 0%~ 0.012%
3	LINE REGULATION (Max)	V1: 0.5 %~ -0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0%~ 0.012%
4	LOAD REGULATION(Max)	V1: 0.5 %~ -0.5 %	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: 0%~ 0%
5	OVER/UNDERSHOOT TEST	< $\pm 5\%$	I/P: 230VAC O/P:FULL LOAD Ta:25°C	< $\pm 5\%$
6	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 28.2mVp-p
high frequency :  Ch1 Pk-Pk 26.0mV low frequency :  Ch1 Pk-Pk 28.2mV				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/2000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/376ms 115VAC/ 612ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage	

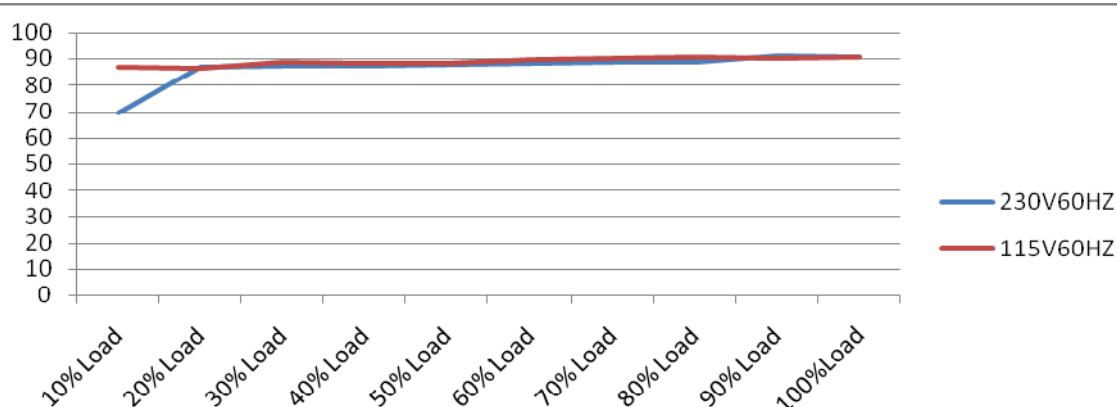
 Δ: 264 V @: 12.0 V Δ: 376ms @: -352ms  Δ: 312 V @: -144 V Δ: 612ms @: -592ms	8 RISE TIME (Max) 230VAC/30ms 115VAC/30ms I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C 230VAC/22.6ms 115VAC/ 21.2ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage  Δ: 2.00 V @: 33.6 V Δ: 22.6ms @: 0.00 s INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage  Δ: 39.0 V @: 4.80 V Δ: 21.2ms @: 0.00 s	9 HOLD UP TIME (Typ.) 230VAC/30ms 115VAC/12ms I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C 230VAC/43.2 ms 115VAC/ 19.2ms
INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  Δ: 162 V @: 310 V Δ: 43.2ms @: -64.0ms INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage  Δ: 30.0 V @: -8.00 V Δ: 19.2ms @: -40.0ms	Model: LRS-35-48 Test Report 3 / 8



INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	67 V~264V
			I/P: (1)LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.42 A 115V/ 0.70 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.348A/ 230VAC I =0.662A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.527 mA N-FG : 0.527 mA
5	NO LOAD CONSUMPTION	< 0.2W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.1169 W < 0.1313 W
6	EFFICIENCY(Typ.)	89%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	90.17%

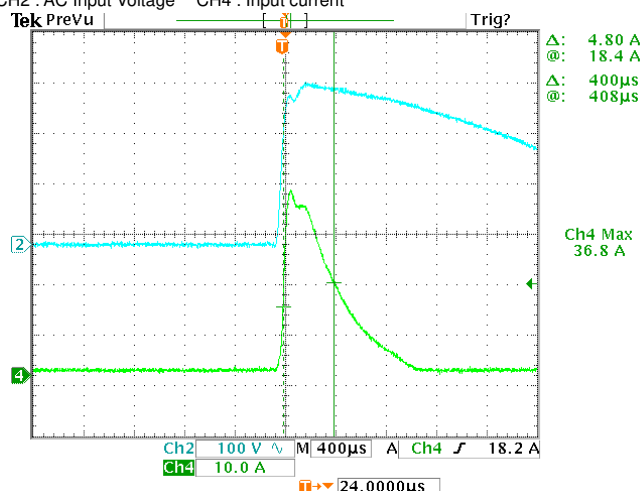
EFFICIENCY vs LOAD



7	INRUSH CURRENT(Typ.)	230V/45A COLD START	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I=36.8A/ 230VAC
---	----------------------	------------------------	---	-----------------

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %~ 150 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	140%/ 264VAC 140%/ 230VAC 132.5%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	55.2V~64.8 V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta: 25°C	59.77V/ 264VAC 59.65V/ 230VAC 59.83V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated 6A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Full load continue Ta:25°C	VDS: (1) 508V (2) 416V (3) 504V
2	Diode Peak Voltage	Q100 Rated 3A/400V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Full load continue Ta:25°C	Q100: VDS: (1) 230V (2) 292V (3) 227V
3	Input Capacitor Voltage	C5 Rated: :68 μ / 400 V 105 °C	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1) 368V (2) 370V (3) 370V
4	Control IC Voltage Test	PWM IC U1 Rated 10.8 V~30V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25°C	(1) 17.1V (2) 14.5V (3) 14.5V (4) 20.5V (5) 14.4V
5	Clamp Diode Peak Voltage	D5 Rated : 3A/600V	I/P : High-Line +3V = 267 V AC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1) 462V (2) 462V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.125KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P:2.74mA I/P-FG:3.85mA O/P-FG:3.78mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999M Ω I/P-FG: 9999M Ω O/P-FG: 9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25°C	22m Ω

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100%LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																												
1	TEMPERATURE RISE TEST	MODEL : LRS-35-24 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=24.8℃ 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=50.1℃ <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 24.8 °C</th><th>HIGH AMBIENT Ta=50.1℃</th></tr><tr><td>1</td><td>LF1</td><td>43.8℃</td><td>68.3℃</td></tr><tr><td>2</td><td>BD1</td><td>48.5℃</td><td>72.1℃</td></tr><tr><td>3</td><td>C5</td><td>49.4℃</td><td>73.0℃</td></tr><tr><td>4</td><td>D5</td><td>76.4℃</td><td>101.4℃</td></tr><tr><td>5</td><td>Q1</td><td>69.5℃</td><td>90.8℃</td></tr><tr><td>6</td><td>C35</td><td>52.2℃</td><td>75.1℃</td></tr><tr><td>7</td><td>T1coil</td><td>58.5℃</td><td>79.7℃</td></tr><tr><td>8</td><td>T1core</td><td>63.1℃</td><td>83.5℃</td></tr><tr><td>9</td><td>C105</td><td>57.3℃</td><td>79.4℃</td></tr><tr><td>10</td><td>C110</td><td>45.2℃</td><td>69.1℃</td></tr><tr><td>11</td><td>L100</td><td>55.8℃</td><td>78.4℃</td></tr><tr><td>12</td><td>Q100</td><td>80.7℃</td><td>103.6℃</td></tr><tr><td>13</td><td>U1</td><td>51.5℃</td><td>75.5℃</td></tr><tr><td>14</td><td>D30</td><td>51.3℃</td><td>74.9℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 24.8 °C	HIGH AMBIENT Ta=50.1℃	1	LF1	43.8℃	68.3℃	2	BD1	48.5℃	72.1℃	3	C5	49.4℃	73.0℃	4	D5	76.4℃	101.4℃	5	Q1	69.5℃	90.8℃	6	C35	52.2℃	75.1℃	7	T1coil	58.5℃	79.7℃	8	T1core	63.1℃	83.5℃	9	C105	57.3℃	79.4℃	10	C110	45.2℃	69.1℃	11	L100	55.8℃	78.4℃	12	Q100	80.7℃	103.6℃	13	U1	51.5℃	75.5℃	14	D30	51.3℃	74.9℃
NO	Position	ROOM AMBIENT Ta= 24.8 °C	HIGH AMBIENT Ta=50.1℃																																																													
1	LF1	43.8℃	68.3℃																																																													
2	BD1	48.5℃	72.1℃																																																													
3	C5	49.4℃	73.0℃																																																													
4	D5	76.4℃	101.4℃																																																													
5	Q1	69.5℃	90.8℃																																																													
6	C35	52.2℃	75.1℃																																																													
7	T1coil	58.5℃	79.7℃																																																													
8	T1core	63.1℃	83.5℃																																																													
9	C105	57.3℃	79.4℃																																																													
10	C110	45.2℃	69.1℃																																																													
11	L100	55.8℃	78.4℃																																																													
12	Q100	80.7℃	103.6℃																																																													
13	U1	51.5℃	75.5℃																																																													
14	D30	51.3℃	74.9℃																																																													



35W Single Output Switching Power Supply

LRS-35 series

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 133% LOAD Ta : 25℃	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100 % LOAD Ta= -25 ℃	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 ℃ NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 ℃ HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃ (0~50℃)	I/P : 230 VAC O/P : FULL LOAD	±0.003%/℃ (0~50℃)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40℃~ +85℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30℃~ 70℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25℃		TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=50 ℃ LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 ℃ LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 ℃ LIFE TIME		(1) 325342HRS (2) 71815HRS (3) 117394HRS (4) 139640HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE : 763.6KHRS		
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50℃		

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014