



## 240W Single Output Industrial DIN RAIL Power Supply

## WDR-240 series



### ■ Features :

- Single and two phase wide input range 180~550VAC
- Built-in active PFC circuit compliance to BS EN/EN61000-3-2
- High efficiency 91% and low power dissipation
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508(industrial control equipment)approved
- BS EN/EN61000-6-2(BS EN/EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty

User's Manual



### ■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



AS/NZS62368-1



TPTC004



UL508



IEC62368-1



### SPECIFICATION

| MODEL                 | WDR-240-24                         | WDR-240-48                                                                                                                                                                      |
|-----------------------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OUTPUT                | DC VOLTAGE                         | 24V                                                                                                                                                                             |
|                       | RATED CURRENT                      | 10A                                                                                                                                                                             |
|                       | CURRENT RANGE                      | 0 ~ 10A                                                                                                                                                                         |
|                       | RATED POWER                        | 240W                                                                                                                                                                            |
|                       | RIPPLE & NOISE (max.) Note.2       | 150mVp-p                                                                                                                                                                        |
|                       | VOLTAGE ADJ. RANGE                 | 24 ~ 28V                                                                                                                                                                        |
|                       | VOLTAGE TOLERANCE Note.3           | ± 1.0%                                                                                                                                                                          |
|                       | LINE REGULATION                    | ± 0.5%                                                                                                                                                                          |
|                       | LOAD REGULATION                    | ± 1.0%                                                                                                                                                                          |
|                       | SETUP, RISE TIME                   | 800ms, 150ms/400VAC 1500ms, 150ms/230VAC at full load                                                                                                                           |
|                       | HOLD UP TIME (Typ.)                | 18ms / 400VAC 18ms / 230VAC at full load                                                                                                                                        |
| INPUT                 | VOLTAGE RANGE Note.6               | 180 ~ 550VAC 254 ~ 780VDC                                                                                                                                                       |
|                       | FREQUENCY RANGE                    | 47 ~ 63Hz                                                                                                                                                                       |
|                       | POWER FACTOR (Typ.)                | PF≥0.84/400VAC PF≥0.84/230VAC                                                                                                                                                   |
|                       | EFFICIENCY (Typ.)                  | 91%                                                                                                                                                                             |
|                       | AC CURRENT (Typ.)                  | 1A/400VAC 2A/230VAC                                                                                                                                                             |
|                       | INRUSH CURRENT (Typ.)              | COLD START 50A                                                                                                                                                                  |
|                       | LEAKAGE CURRENT                    | <3.5mA / 530VAC                                                                                                                                                                 |
| PROTECTION            | OVERLOAD                           | 105 ~ 130% rated output power<br>Protection type : Constant current limiting, unit will shut down after 3 sec. , auto-recovery after 1 minute if the fault condition is removed |
|                       | OVER VOLTAGE                       | 29 ~ 33V 56 ~ 65V<br>Protection type : Shut down o/p voltage, auto-recovery after 1 minute if the fault condition is removed                                                    |
|                       | OVER TEMPERATURE                   | 90°C ± 5°C (TSW) detect on heatsink of power switch<br>Protection type : Shut down o/p voltage, recovers automatically after temperature goes down                              |
| FUNCTION              | DC OK REALY CONTACT RATINGS (max.) | 60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load                                                                                                                                 |
| ENVIRONMENT           | WORKING TEMP. Note.5               | -30 ~ +70°C (Refer to "Derating Curve")                                                                                                                                         |
|                       | WORKING HUMIDITY                   | 20 ~ 95% RH non-condensing                                                                                                                                                      |
|                       | STORAGE TEMP., HUMIDITY            | -40 ~ +85°C, 10 ~ 95% RH                                                                                                                                                        |
|                       | TEMP. COEFFICIENT                  | ± 0.03%/°C (0 ~ 50°C)                                                                                                                                                           |
|                       | VIBRATION                          | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6                                                                    |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS                   | UL508,EAC TP TC 004 approved,IEC62368-1 CB approved by SIQ,design refer to BS EN/EN62368-1, AS/NZS 62368.1,GL; (meet BS EN/EN60204-1)                                           |
|                       | WITHSTAND VOLTAGE                  | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC                                                                                                                     |
|                       | ISOLATION RESISTANCE               | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C/ 70% RH                                                                                                                      |
|                       | EMC EMISSION                       | Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020                                                                             |
|                       | EMC IMMUNITY                       | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN61000-6-2 (BS EN/EN50082-2), BS EN/EN61204-3, heavy industry level, EAC TP TC 020 approved                 |
| OTHERS                | MTBF                               | 1062.8K hrs min. Telcordia SR-332 (Bellcore) ; 141.1K hrs min. MIL-HDBK-217F (25°C)                                                                                             |
|                       | DIMENSION                          | 63*125.2*113.5mm (W*H*D)                                                                                                                                                        |
|                       | PACKING                            | 1.06Kg; 12pcs/13.7Kg/1.22CUFT                                                                                                                                                   |


**NOTE**

1. All parameters NOT specially mentioned are measured at 400VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.
6. Derating may be needed under low input voltage. Please check the derating curve for more details.
7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

Case No. 979B Unit:mm

## Mechanical Specification

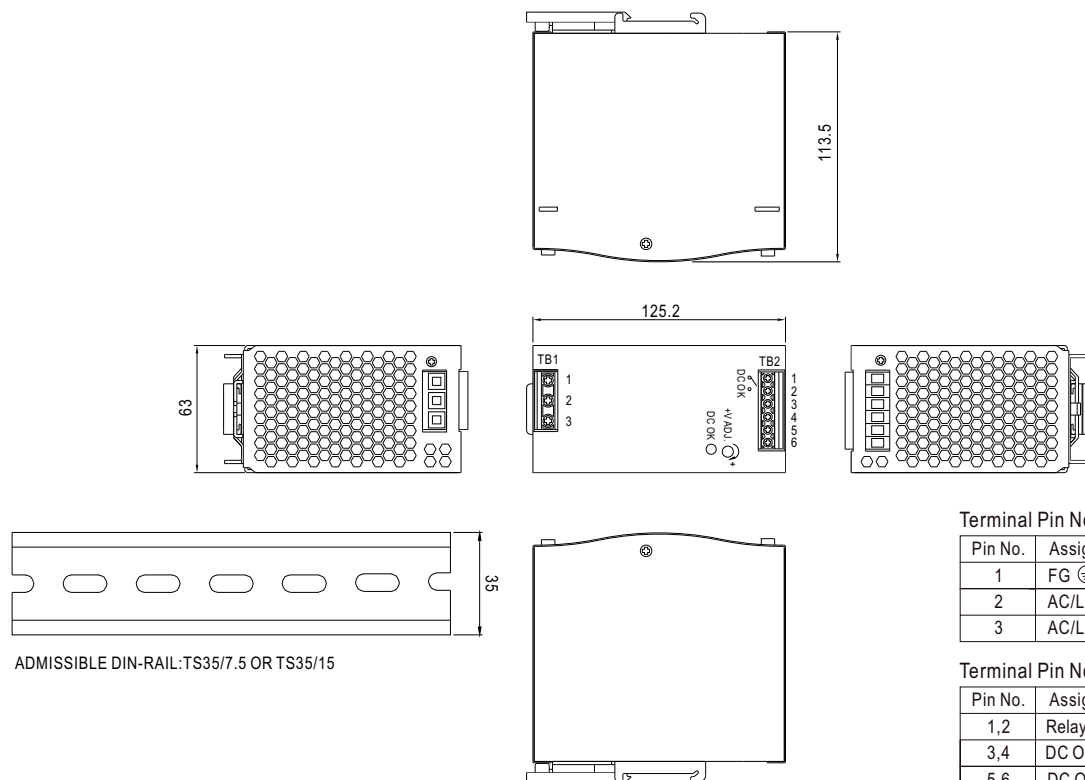


Terminal Pin No. Assignment (TB1)

| Pin No. | Assignment  |
|---------|-------------|
| 1       | FG $\oplus$ |
| 2       | AC/L2       |
| 3       | AC/L1       |

Terminal Pin No. Assignment (TB2)

| Pin No. | Assignment    |
|---------|---------------|
| 1,2     | Relay Contact |
| 3,4     | DC OUTPUT +V  |
| 5,6     | DC OUTPUT -V  |


## Block Diagram

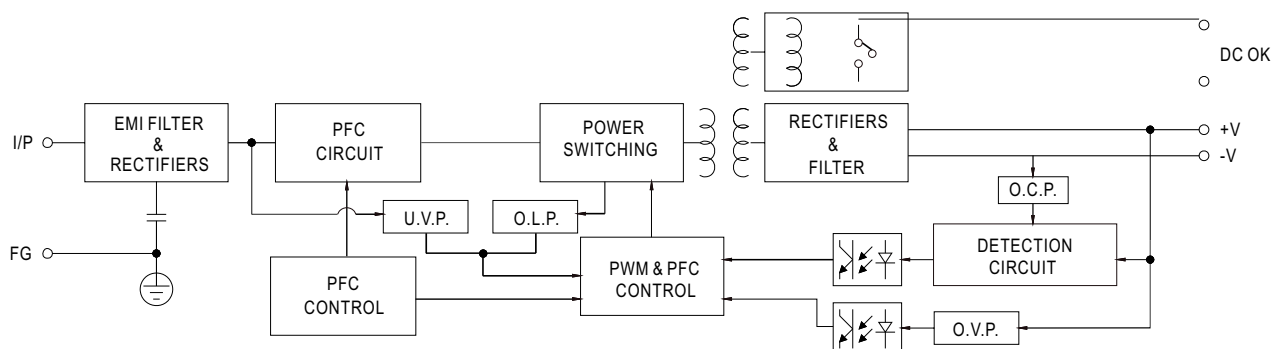

## DC OK Relay Contact

|                        |                          |
|------------------------|--------------------------|
| Contact Close          | PSU turns on / DC OK.    |
| Contact Open           | PSU turns off / DC Fail. |
| Contact Ratings (max.) | 30V/1A resistive load.   |

■ Derating Curve

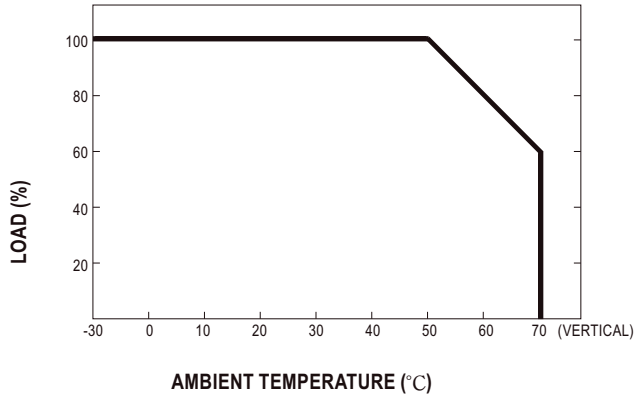

■ Output derating VS input voltage

