Simpex Electronic AG Binzackerstrasse 33 CH-8620 Wetzikon Telefon +41 44 931 10 30

www.simpex.ch contact@simpex.ch CHE-108.018.777 MWST

# electronic RECOM

### **Features**


### Tested and proved in RECOM filter design

### RoHS2+ compliant

### • SMD

# Line Inductors

### **Model Numbering**



#### Notes:

Note1: with suffix "-R", standard packaging tape and reel without suffix optional airbag packaging


### **RLS-567**

# Inductors for RECOM Power Supply


### Specifications (measured @ Ta= 25°C, unless otherwise stated)

BASIC CHARACTERISTICS					
Parameter		Condition	Value		
Inductance	L	100kHz/100mV	5.6μH ±20%		
DC Resistance	RDC	@ 25°C	180m $Ω$ max.		
Rated Current	I <sub>B</sub>	ΔT ≤ 40°C	1.18A max.		
Saturation Current	Isat	I ΔL/LI < 10%	1.9A typ.		

### Inductance vs. Current graph



### Impedance graph









www.recom-power.com REV.: 1/2019 P-1




## **RLS-567**

### Specifications (measured @ Ta= 25°C, unless otherwise stated)

ENVIRONMENTAL				
Parameter	Condition	Value		
Operating Temperature Range	with derating	-40°C to +125°C		
Operating Humidity	non-condensing	95% RH max.		

Parameter		Туре	Value
Dimension (LxWxH)			4.5 x 3.2 x 2.6mm
Weight			0.15g typ
Dimension Drawing (mm)	4.5		
		Recommended Footprint Details  4.8REF 2.0REF	
		L <sub>0.7REF</sub>	Tolerance: xx.x= ±0.5mm

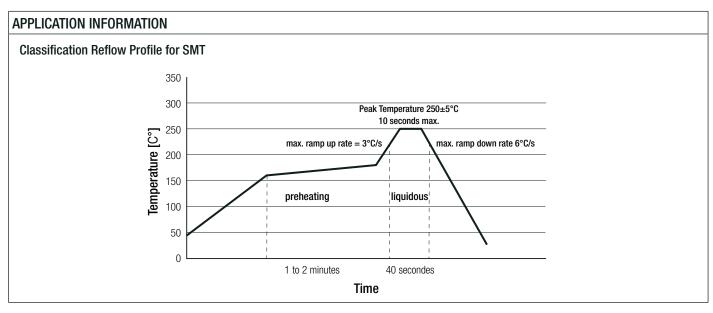



### **RLS-567**

### Specifications (measured @ Ta= 25°C, unless otherwise stated)

PACKAGING INFORMATION				
Parameter	Туре	Value		
Deckaring Dimension (LyMA)	tape and reel (carton)	355.0 x 340.0 x 35.0mm		
Packaging Dimension (LxWxH)	airbag	120.0 x 100.0 x 30.0mm		
Packaging Quantity	tape and reel	2000pcs		
Packaging Quantity	airbag	50pcs		
Tape Width		12.0mm		
Storage Temperature Range		-55°C to +125°C		
Storage Humidity	non-condensing	95% RH max.		

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

www.recom-power.com REV.: 1/2019 P-3