



Test Report: LOP-400-54

400W 5"×3" Low Profile Open Frame Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

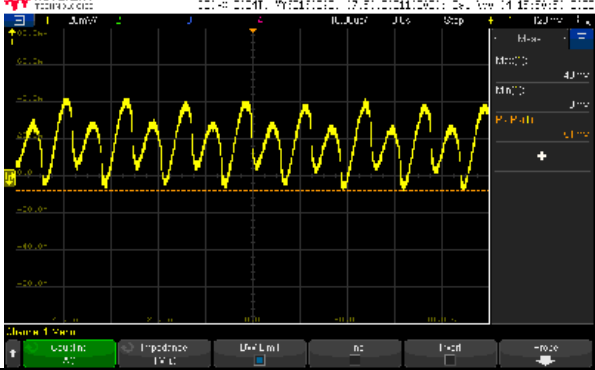
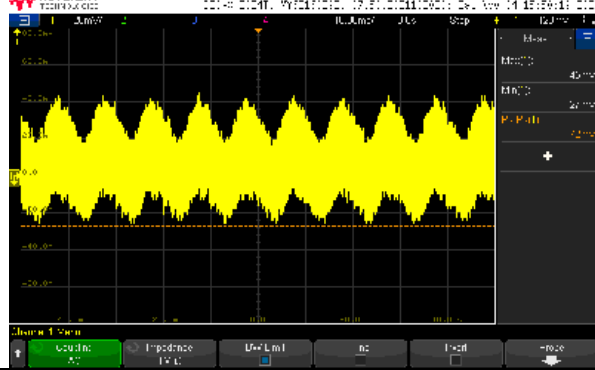
E.M.C. Test

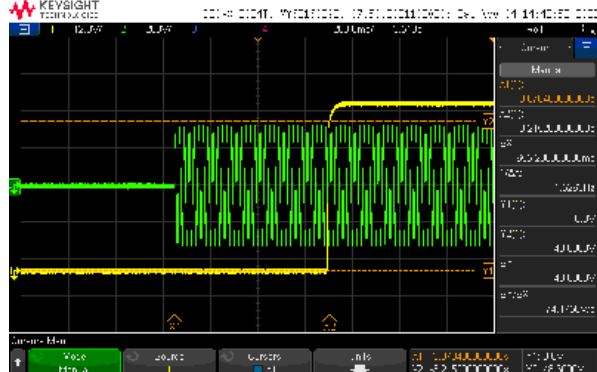
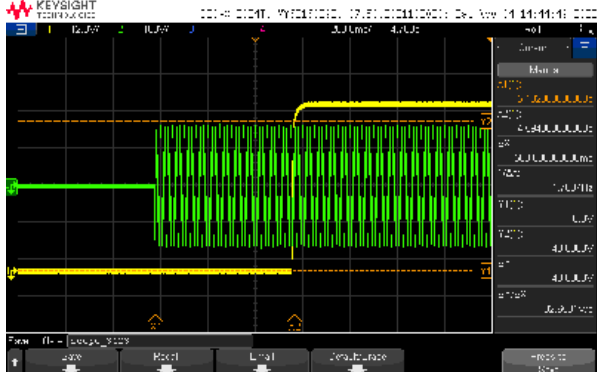
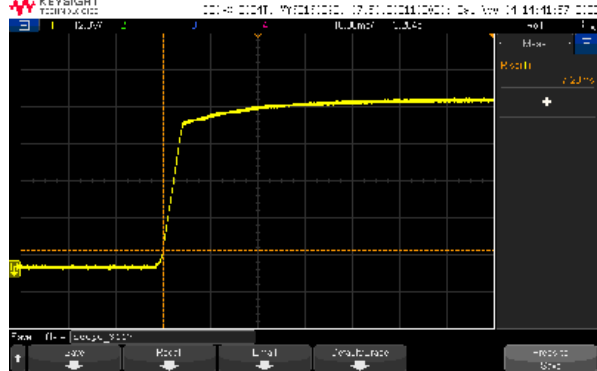
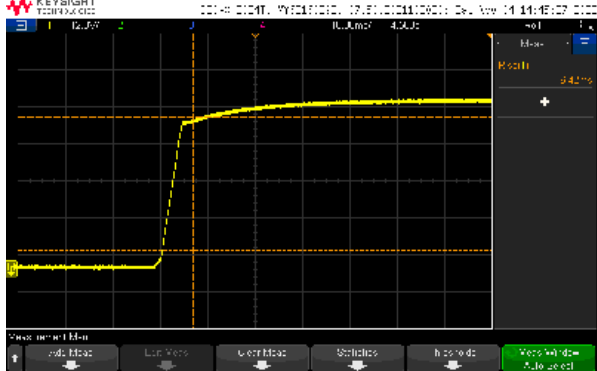
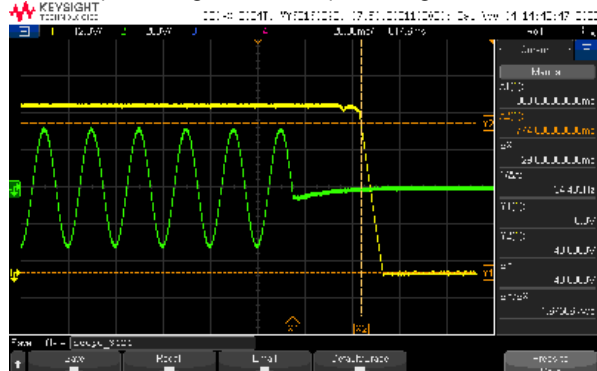
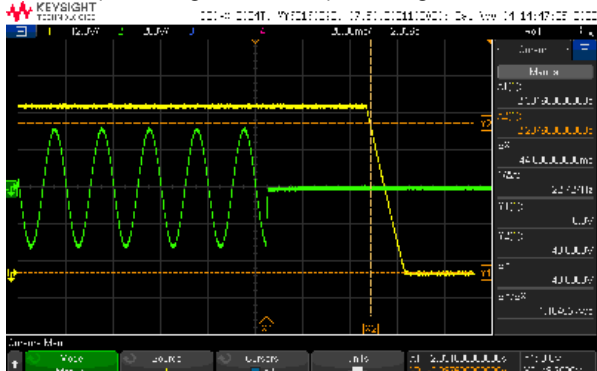
■ RELIABILITY TEST

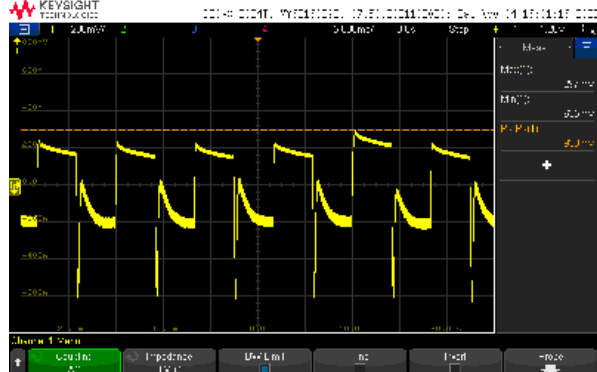
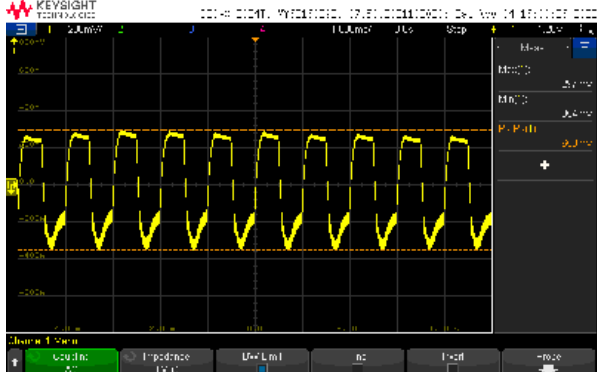
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

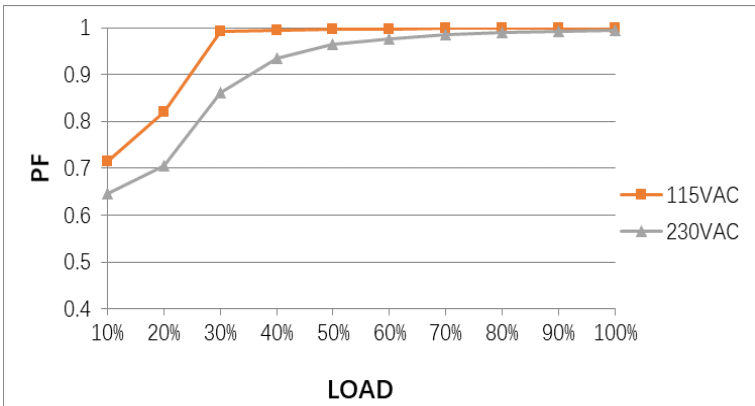
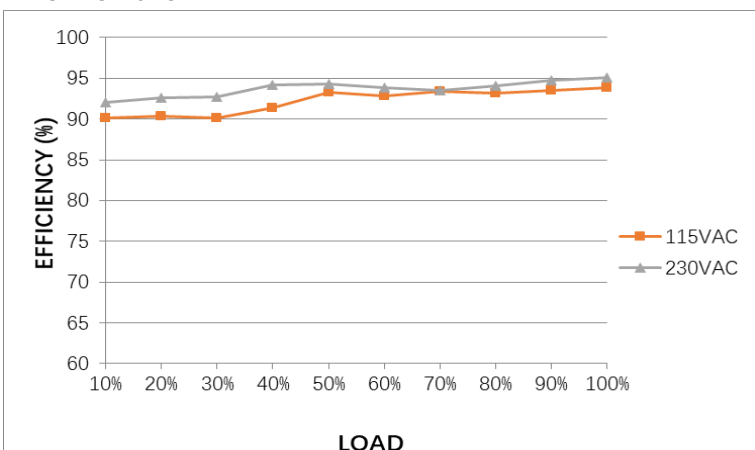
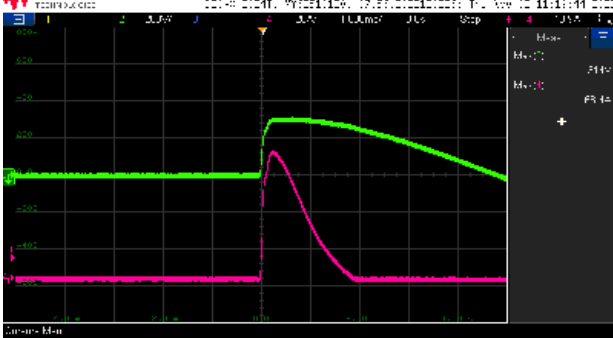
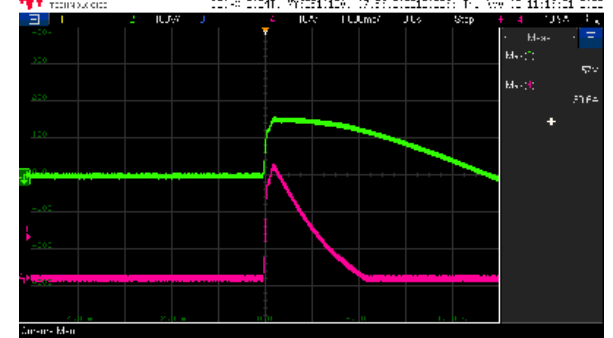
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 52V~58V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	49.54V~59.19V/230VAC 49.542V~59.19V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 80VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.0185% ~0.056 %
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0% ~ 0.0185%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.0185% ~0.056 %
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD/NO LOAD Ta:25°C	1.9%
6	RIPPLE & NOISE (Max)	V1: 250mVp-p	I/P:230VAC O/P: FULL LOAD Ta:25°C	V1: 51mVp-p / high frequency 72mVp-p / low frequency
high frequency :				
low frequency :				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 655.2ms 115VAC/ 588.0ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage		

8				
	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/7.23ms 115VAC/ 6.42ms
9	INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage 	
	HOLD UP TIME (Typ.)	16ms /400W load 30ms /250W load	I/P : 230 VAC O/P : TESTING Ta : 25°C	29.0ms /400W load 44.0ms /250W load
10	INPUT=230VAC/50HZ @ 400W load CH1: Output Voltage CH2: AC Input Voltage 		INPUT=230VAC/50HZ @ 250W load CH1: Output Voltage CH2: AC Input Voltage 	
	DYNAMIC LOAD	V1: 5400mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY / 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	930mVp-p 650mVp-p
FULL /0% LOAD 50%DUTY / 120HZ		FULL /0% LOAD 50%DUTY / 1KHZ		

			
11	TRANSIENT RECOVERY TIME	V1: 5400mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us 430mVp-p 0us
12	PEAK LOAD	150% PEAK LOAD@3S	I/P: 264VAC I/P: 115VAC O/P: PEAK LOAD TEST : OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC 	(1) I/P: TESTING O/P: FULL / 70% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 70% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 70% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 75.0V~264V/ FULL LOAD 75.0V~264V/ 70% LOAD (2) 106Vdc~370Vdc/FULL LOAD 106Vdc~370Vdc/70% LOAD (3) 106Vdc~370Vdc/FULL LOAD 106Vdc~370Vdc/70% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 2.1A 115V/ 4.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =1.8328A/ 230VAC I =3.8228A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current < 500uA(rms) @ 264VAC Touch current < 70uA(rms) @ 264VAC	I/P : 264 VAC/60HZ O/P : Min LOAD Ta : 25°C	Earth: 320uA / 264VAC Touch:45uA / 264VAC
5	NO LOAD CONSUMPTION	<0.5W	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.346W

6	POWER FACTOR (Typ.)	0.95/230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9994/230VAC PF=0.9981/115VAC
	P.F vs LOAD 			
7	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	95.59 %
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =68.4A/ 230VAC I =30.6A/ 115VAC T50= 860us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current  INPUT=115VAC/ 60HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 ~ 150% rated output power PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	137.52%/ 264VAC 137.51%/ 230VAC 136.81%/ 115VAC PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	59.4V~67.5V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	63.8V/ 264VAC 63.9V/ 80VAC Protection type: Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	EXTERNAL FAN SUPPLY	12V@0.5A for driving a fan ; tolerance -15% ~ +15% at main output 20% rated current (23CFM)	I/P: 230 VAC O/P: TESTING Ta:25°C	TEST : <u>-0.408% ~0.3 %</u>
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.5V.	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	TEST : OK

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/ Q3 Rated: 18A/ 600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	Q2: VDS: (1) 466V (2) 470V (3) 462V (4) 462V (5) 462V (6) 458V (7) 490V (8) 458V Q3: VDS: (1) 458V (2) 474V (3) 462V (4) 462V (5) 454V (6) 458V (7) 486V (8) 458V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 26A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	VDS: (1) 494V (2) 458V (3) 474V (4) 486V (5) 482V (6) 470V (7) 494V (8) 502V
3	P.F.C DIODE	D2 Rated: 6A/ 650V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 421V (2) 421V (3) 421V (4) 417V (5) 433V
4	Diode Peak Voltage	Q101/Q103 Rated:	AC ON/OFF I/P: High-Line +3V =267 V	Q101: Vo=Vmax Q103: Vo=Vmax

		19A/ 200V	Vo=Vmax O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) burst Mode (10) Peak Load Vo=Vnormal O/P: (1) Full Load Ta:25°C	VDS: (1) 164V (2) 162V (3) 164V (4) 162V (5) 163V (6) 165V (7) 159V (8) 146V (9) 147V (10) 169V Vo=Vnormal (1) 156V	VDS: (1) 171V (2) 170V (3) 170V (4) 170V (5) 170V (6) 170V (7) 176V (8) 157V (9) 162V (10) 178V Vo=Vnormal (1) 171V
5	Input Capacitor Voltage	C5 Rated: 270μ / 420V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 421V (2) 405V (3) 429V (4) 409V	
6	Control IC Voltage Test	PFC /PWM IC U1: Rated : 10.4V~28.7 V O/P IC U101 Rated : 4.75V~38 V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 (1) 19.3V (2) 19.3V (3) 19.3V (4) 19.2V (5) 19.2V	U101 (1) 11.9V (2) 11.8V (3) 11.9V (4) 11.9V (5) 11.9V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 2.36mA I/P-FG: 3.09mA O/P-FG: 1.477mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50GΩ I/P-FG: 50GΩ O/P-FG: 50GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 Class A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) BS EN/EN55011(CISPR11) Class I : Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I : Class B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32) BS EN/EN55011(CISPR11) Class I : Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I : Class B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	BS EN/EN61000-4-5 ■ INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : LOP-400-48 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta= 26.0 °C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta= 50.0 °C		

			NO	Position	ROOM AMBIENT Ta= 26.0°C	HIGH AMBIENT Ta= 50.0°C
			1	ZNR1	27.7°C	51.7°C
			2	C1	27.4°C	51.3°C
			3	LF2	31.9°C	55.9°C
			4	LF1	27.6°C	51.9°C
			5	C2	28.0°C	52.0°C
			6	RTH1	32.3°C	56.3°C
			7	BD1	45.8°C	69.1°C
			8	RY1	43.1°C	66.9°C
			9	C8	36.2°C	59.3°C
			10	L1	42.5°C	66.4°C
			11	Q1	44.5°C	70.7°C
			12	D2	48.9°C	73.9°C
			13	Q3	48.3°C	74.2°C
			14	Q2	48.4°C	73.5°C
			15	C54	39.8°C	63.6°C
			16	C60	26.9°C	51.2°C
			17	T1 coil	52.4°C	77.4°C
			18	T1 core	37.3°C	62.5°C
			19	C5	35.7°C	59.2°C
			20	RTH3	39.1°C	61.6°C
			21	U1	41.2°C	63.8°C
			22	D103	35.0°C	58.7°C
			23	C125	35.9°C	58.7°C
			24	Q102	35.0°C	60.0°C
			25	Q103	36.3°C	61.5°C
			26	C103	31.4°C	55.8°C
			27	C104	33.0°C	56.9°C
			28	L100	33.3°C	57.0°C
			29	U101	32.5°C	57.6°C
			30	RG100	47.0°C	67.2°C
			31	R100	31.7°C	55.8°C
			32	R122	42.1°C	61.0°C
			33	D105	41.8°C	61.2°C
			34	U4	35.0°C	55.2°C
			35	D1	33.4°C	57.2°C
			36	R3	39.2°C	62.3°C
			37	D20	29.5°C	53.4°C
			38	C112	31.6°C	54.9°C
			39	R105	33.9°C	58.7°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 139.16% LOAD Ta : 25°C		TEST : OK	
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100% LOAD Ta= -45 °C		TEST : OK	

4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.008 %/°C(0~50°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC	
7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C104 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME		(1) 2112136.4 HRS (2) 375973.5 HRS (3) 468129.5 HRS (4) 540002.5 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1696.4K hrs min. Telcordia SR-332 (Bellcore) ; 231.2K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009