



Test Report: LOP-500-15

500W 5"×3" Low Profile Open Frame Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

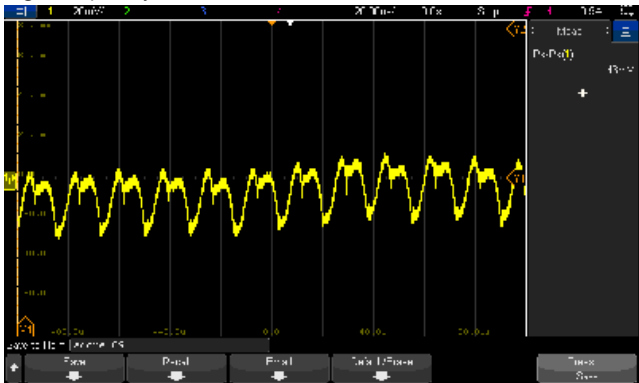
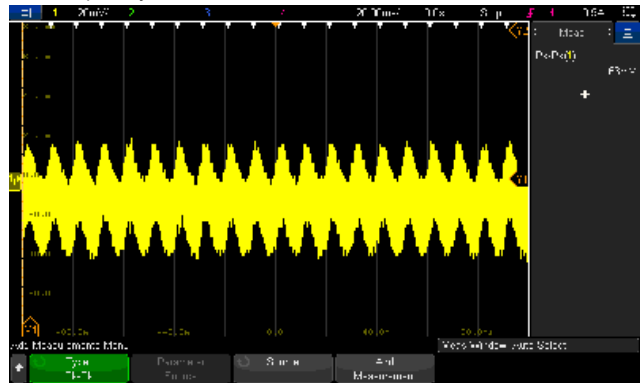
E.M.C. Test

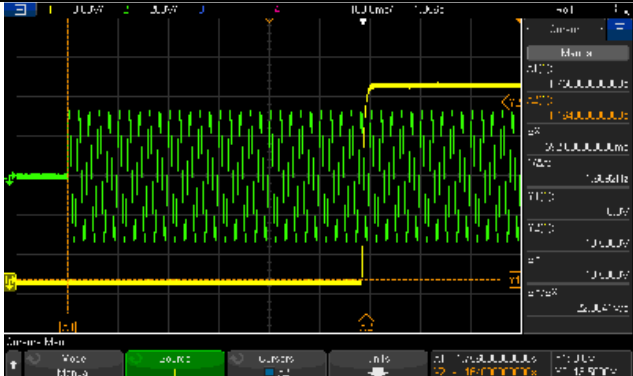
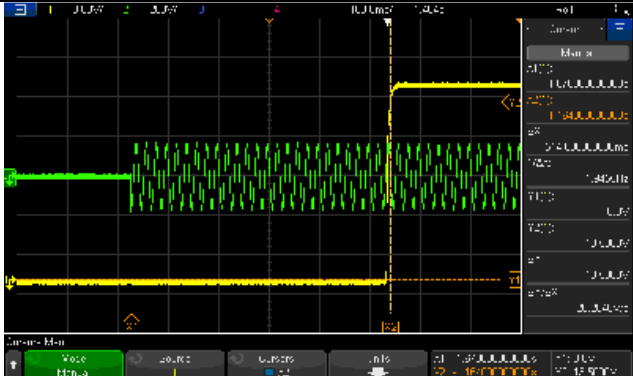
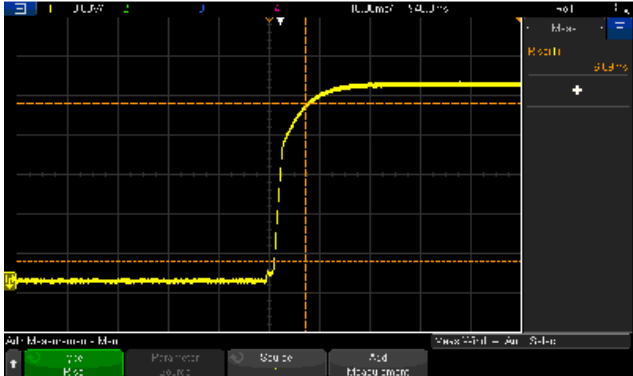
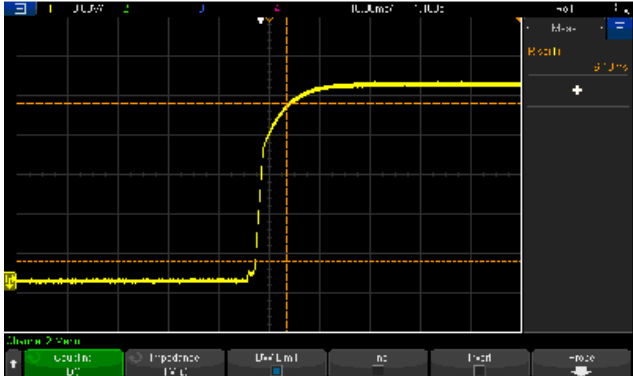
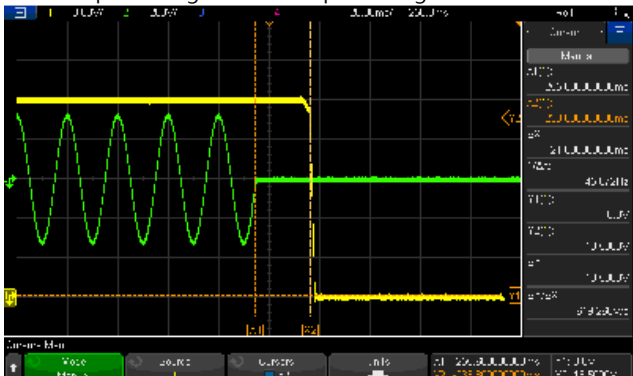
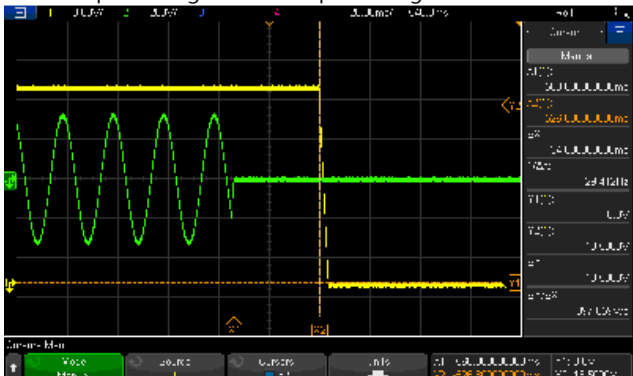
■ RELIABILITY TEST

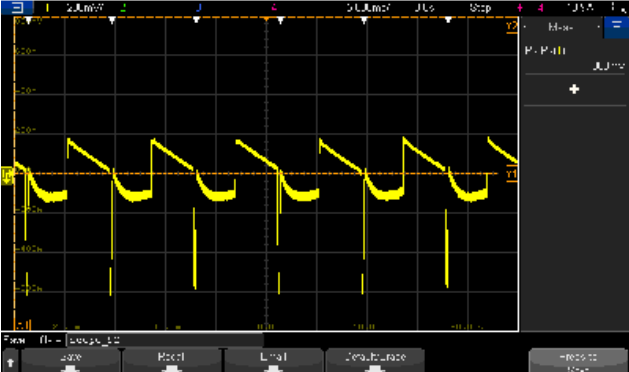
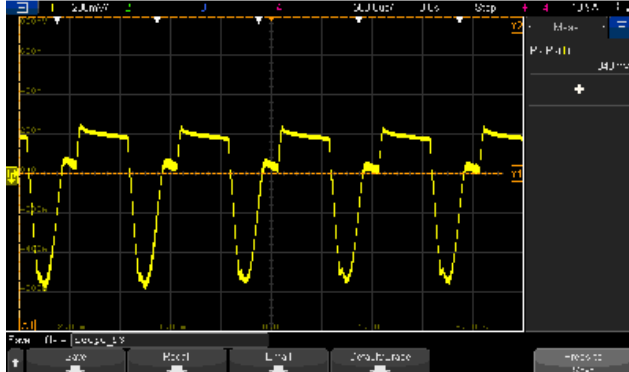
ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

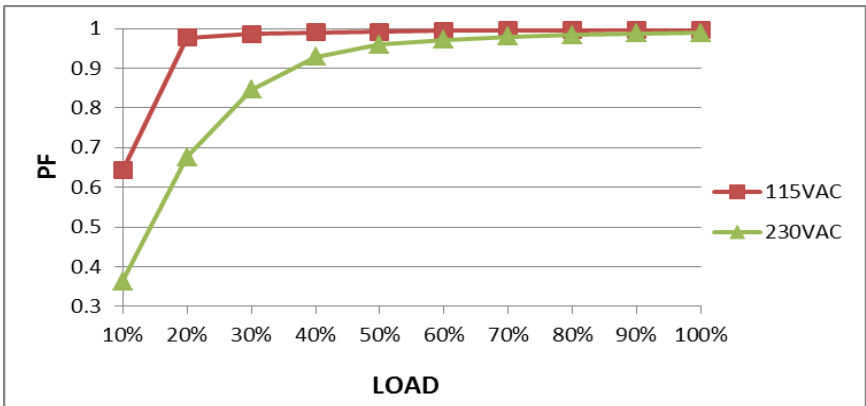
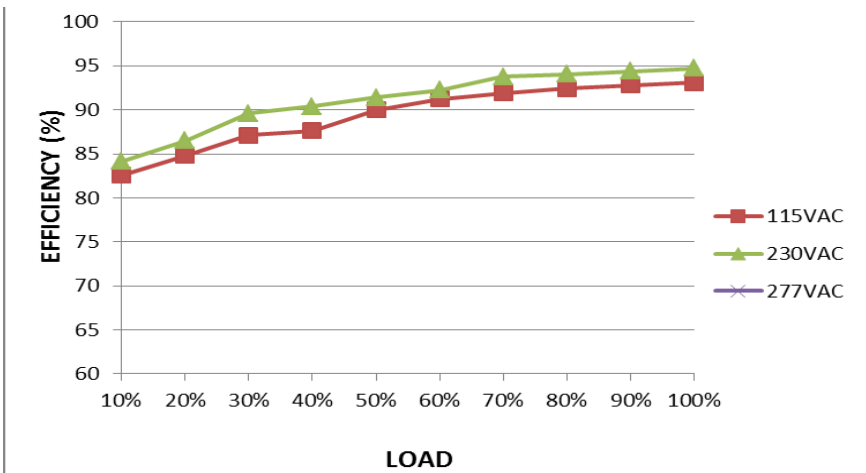
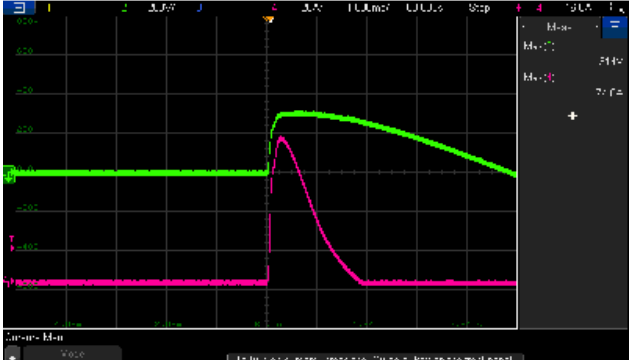
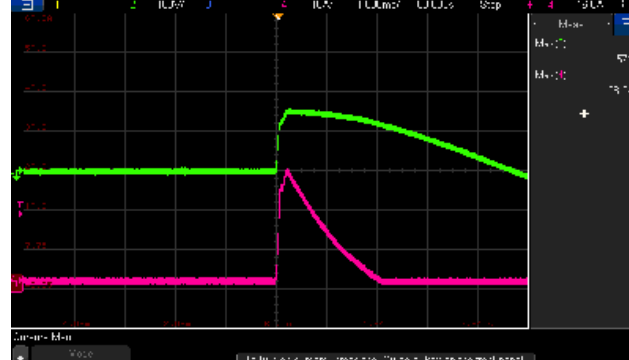
NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 14.3V~15.8V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	13.81V~16.14V/230VAC 13.81V~16.14V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -3% ~ +3%	I/P: 80VAC~ 264VAC O/P:FULL~ MIN. LOAD Ta:25°C	V1: -0.04% ~ 0.11%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0% ~ 0%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.04% ~ 0.11%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD/NO LOAD Ta:25°C	1.39%
6	RIPPLE & NOISE (Max)	V1: 150mVp-p	I/P:230VAC O/P: FULL LOAD Ta:25°C	V1: 43mVp-p / high frequency 63mVp-p / low frequency
high frequency :  low frequency : 				
7	SET UP TIME(Max)	230VAC/1000ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 592ms 115VAC/ 514ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage			INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH2: AC Input Voltage	

8				
	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 6.09ms 115VAC/ 6.13ms
9	INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage 	
	HOLD UP TIME (Typ.)	16ms /500W load 26ms /300W load	I/P : 230 VAC O/P : TESTING Ta : 25°C	21.8ms /500W load 34ms /300W load
10	INPUT=230VAC/50HZ @ 500W load CH1: Output Voltage CH2: AC Input Voltage 		INPUT=230VAC/50HZ @ 300W load CH1: Output Voltage CH2 AC Input Voltage 	
	DYNAMIC LOAD	V1: 1500mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY / 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	800mVp-p 840mVp-p
	FULL /0% LOAD 50%DUTY / 120HZ		FULL /0% LOAD 50%DUTY / 1KHZ	

				
11	TRANSIENT RECOVERY TIME	V1: 1500mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	302mVp-p 0us
12	PEAK LOAD	150% PEAK LOAD@3S	I/P: 264VAC I/P: 115VAC O/P: PEAK LOAD	TEST : OK

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC 	(1) I/P: TESTING O/P: FULL / 70% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 70% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 70% LOAD Ta:25°C I/P: HIGH-LINE+15%=300V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 75V~264V/ FULL LOAD 75V~264V/ 70% LOAD (2) 108.0Vdc~370Vdc/FULL LOAD 108.0Vdc~370Vdc/70% LOAD (3) 108.0Vdc~370Vdc/FULL LOAD 108.0Vdc~370Vdc/70% LOAD TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK
3	INPUT CURRENT (Typ.)	230V/ 2.6A 115V/ 5.2A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =2.32A/ 230VAC I =4.85A/ 115VAC
4	LEAKAGE CURRENT	Earth leakage current <500uA(rms) @ 264VAC touch current <70uA(rms) @ 264VAC	I/P : 264 VAC/60HZ O/P : Min LOAD Ta : 25°C	276 uA / 264 VAC@ For Earth 27.4uA / 264 VAC@For Touch
5	NO LOAD CONSUMPTION	<0.5W 加严 : 0.45W	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.2572W

6	POWER FACTOR (Typ.)	0.94/ 230VAC 0.98/115VAC	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9968/230VAC PF=0.9967/115VAC
	P.F vs LOAD 			
7	EFFICIENCY(Typ.)	94.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	94.75%
	EFFICIENCY vs LOAD 			
8	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =74A/ 230VAC I =28.2A/ 115VAC T50= 820us/230V
	INPUT=230VAC/50HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current  INPUT=115VAC/60HZ @ FULL LOAD CH2: AC Input Voltage CH4: Input current 			

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 150% PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	123.4%/ 264VAC 122.8%/ 230VAC 40.9A 123.4%/ 115VAC PROTECTION TYPE : Hiccup after 3 sec, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	16.5V~19.5V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: MIN LOAD Ta:25°C	18.4V/ 264VAC 18.5V/ 80VAC Protection type: Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Protection type : Shut down o/p voltage, recovers automatically after temperature goes down or re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : OK Hiccup mode, recovers automatically after fault condition is removed

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	EXTERNAL FAN SUPPLY	1) 12V@0.5A for driving a fan ; tolerance -15% ~ +15% at main output 20% rated current (23CFM)	I/P: 230 VAC O/P: TESTING Ta:25°C	TEST : <u>-5.2369% ~ 0.0332%</u>
2	REMOTE SENSE	S+ / S- The remote sensing compensates voltage drop on the load wiring up to 0.5V	I/P: 230 VAC O/P: FULL LOAD Ta:25°C	TEST : <u>OK</u>

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q2/ Q3 Rated: 22A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz	Q2: VDS: (1) 440V (2) 464V (3) 432V (4) 432V (5) 432V (6) 432V (7) 484V (8) 456V Q3: VDS: (1) 428V (2) 460V (3) 428V (4) 432V (5) 428V (6) 420V (7) 452V (8) 436V

			(6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 34A/600V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load (8) Peak Load Ta:25°C	VDS: (1) 492V (2) 472V (3) 492V (4) 492V (5) 496V (6) 488V (7) 512V (8) 516V
3	P.F.C DIODE	D2 Rated: 6A/ 650V	I/P: High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 428V (2) 420V (3) 424V (4) 428V (5) 436V
4	Diode Peak Voltage	Q101/Q103 Rated: 140A/ 60V	AC ON/OFF I/P: High-Line +3V =267 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) burst Mode (10) Peak Load <u>VO=Vnormal</u>	Q101: <u>VO=Vomax</u> Q103: <u>VO=Vomax</u> VDS: (1) 42.2V (2) 42.6V (3) 43.4V (4) 42.6V (5) 42.2V (6) 42.2V (7) 43.0V (8) 40.2V (9) 40.2V (10) 43.0V <u>VO=Vnormal</u> (1) 40.6V Q103: <u>VO=Vomax</u> VDS: (1) 42.2V (2) 41.8V (3) 43.0V (4) 42.2V (5) 42.2V (6) 42.6V (7) 44.2V (8) 41.8V (9) 41.4V (10) 43.0V <u>VO=Vnormal</u> (1) 40.6V

			O/P: (1) Full Load Ta:25°C	
5	Input Capacitor Voltage	C5 Rated: 270μ / 420V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 408V (2) 408V (3) 412V (4) 412V
6	Control IC Voltage Test	PFC /PWM IC U1: Rated : 10.4V ~28.7 V O/P IC U101 Rated : 4.75V~38 V IC U103 Rated : 2V~ 7V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P. (5) NO LOAD VRmin (LOW LINE) Ta:25°C	U1 (1) 18.9V (2) 18.9V (3) 18.9V (4) 18.9V (5) 18.9V U103 (1) 5.20V (2) 5.20V (3) 5.20V (4) 5.20V (5) 5.20V U101 (1) 11.6V (2) 11.6V (3) 11.6V (4) 11.6V (5) 11.6V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P: 1.744mA I/P-FG: 2.72mA O/P-FG:0.735mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P:50GΩ I/P-FG:50GΩ O/P-FG:50GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32) Class I: Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I: Class B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab

3	RADIATION	BS EN/EN55032(CISPR32) Class I: Class B , Class II: Class A BS EN/EN55014(CISPR32) Class I: Class B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
6	SURGE	IEC61000-4-5 ■ INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	■ CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																				
1	TEMPERATURE RISE TEST	MODEL : LOP-500-12 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 25 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 25 °C</th><th>HIGH AMBIENT Ta= 50 °C</th></tr><tr><td>1</td><td>ZNR1</td><td>31.1°C</td><td>58.6°C</td></tr><tr><td>2</td><td>LF2</td><td>36.1°C</td><td>63.1°C</td></tr><tr><td>3</td><td>BD1</td><td>42.1°C</td><td>68.3°C</td></tr><tr><td>4</td><td>LF1</td><td>27.7°C</td><td>54.2°C</td></tr><tr><td>5</td><td>C2</td><td>29.3°C</td><td>56.0°C</td></tr><tr><td>6</td><td>RTH1</td><td>29.3°C</td><td>55.9°C</td></tr><tr><td>7</td><td>RY1</td><td>37.9°C</td><td>64.2°C</td></tr><tr><td>8</td><td>RTH3</td><td>34.3°C</td><td>61.4°C</td></tr><tr><td>9</td><td>C8</td><td>36.8°C</td><td>63.2°C</td></tr><tr><td>10</td><td>L1</td><td>47.2°C</td><td>73.4°C</td></tr><tr><td>11</td><td>C60</td><td>25.7°C</td><td>52.0°C</td></tr><tr><td>12</td><td>T1coil</td><td>61.3°C</td><td>90.6°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C	1	ZNR1	31.1°C	58.6°C	2	LF2	36.1°C	63.1°C	3	BD1	42.1°C	68.3°C	4	LF1	27.7°C	54.2°C	5	C2	29.3°C	56.0°C	6	RTH1	29.3°C	55.9°C	7	RY1	37.9°C	64.2°C	8	RTH3	34.3°C	61.4°C	9	C8	36.8°C	63.2°C	10	L1	47.2°C	73.4°C	11	C60	25.7°C	52.0°C	12	T1coil	61.3°C	90.6°C
NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C																																																					
1	ZNR1	31.1°C	58.6°C																																																					
2	LF2	36.1°C	63.1°C																																																					
3	BD1	42.1°C	68.3°C																																																					
4	LF1	27.7°C	54.2°C																																																					
5	C2	29.3°C	56.0°C																																																					
6	RTH1	29.3°C	55.9°C																																																					
7	RY1	37.9°C	64.2°C																																																					
8	RTH3	34.3°C	61.4°C																																																					
9	C8	36.8°C	63.2°C																																																					
10	L1	47.2°C	73.4°C																																																					
11	C60	25.7°C	52.0°C																																																					
12	T1coil	61.3°C	90.6°C																																																					

			NO	Position	ROOM AMBIENT Ta= 25 °C	HIGH AMBIENT Ta= 50 °C
			13	T1core	39.0°C	66.1°C
			14	D2	44.6°C	71.6°C
			15	Q1	43.7°C	70.7°C
			16	Q3	43.3°C	70.8°C
			17	Q2	43.1°C	70.4°C
			18	U1	40.7°C	67.0°C
			19	C5	38.6°C	64.9°C
			20	C55	40.6°C	67.9°C
			21	D103	42.6°C	70.2°C
			22	C120	45.3°C	73.6°C
			23	C104	52.6°C	80.6°C
			24	Q103	57.0°C	86.6°C
			25	Q102	55.8°C	85.6°C
			26	C103	44.7°C	72.9°C
			27	C102	48.1°C	76.4°C
			28	L100	70.7°C	99.5°C
			29	R3	35.2°C	62.0°C
			30	D1	32.0°C	58.5°C
			31	U103	34.7°C	61.5°C
32	U101	37.1°C	63.9°C			
33	RG100	42.1°C	69.1°C			
34	U3	32.4°C	58.8°C			
35	D105	37.8°C	63.5°C			
36	D20	28.7°C	55.4°C			
37	R100	51.1°C	78.0°C			
38	R122	43.9°C	70.7°C			
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 230 VAC O/P : 124.7%LOAD Ta : 25°C		TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 264VAC/115VAC O/P : 100%LOAD Ta= -45°C		TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C/95 %R.H NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H		TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03%/°C(0~50°C)		I/P : 230 VAC O/P : FULL LOAD		±0.006%/°C(0~50°C)
6	STORAGE TEMPERATURE TEST	-40~85°C		1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/output condition : STATIC		

7	THERMAL SHOCK TEST	-40~50°C	1. Thermal shock Temperature : -45°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 461096.6HRS (2) 64845.1HRS (3) 182371.4HRS (4) 345280.8HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1695.7K hrs min. Telcordia SR-332 (Bellcore) ; 230.7K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Yuwei	Liutt	Wangdz

2020.10.1 TAG-QA-009