



TEST REPORT: MPM-15-3.3

15W High Reliable Green Medical Encapsulated Type

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

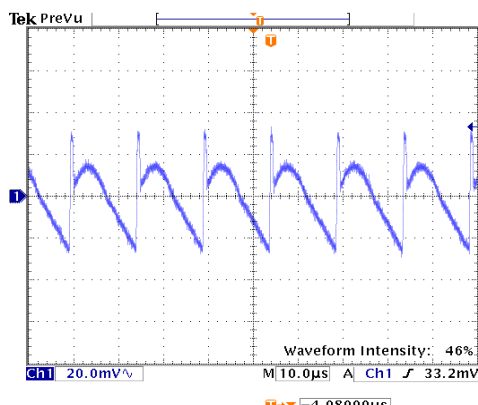
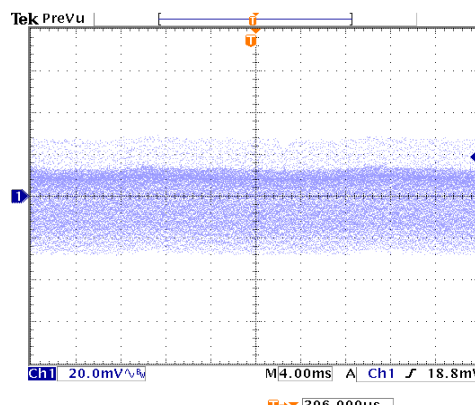
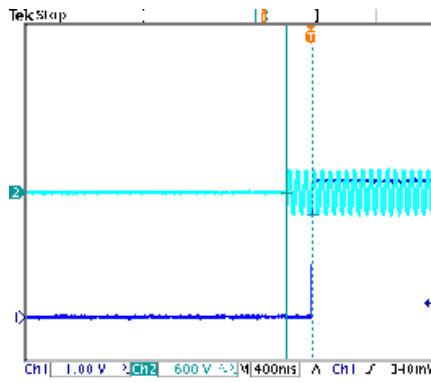
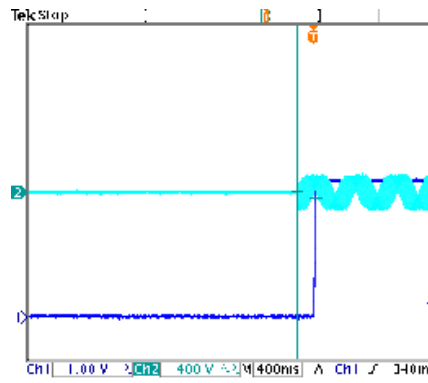
■ SAFETY & E.M.C. TEST

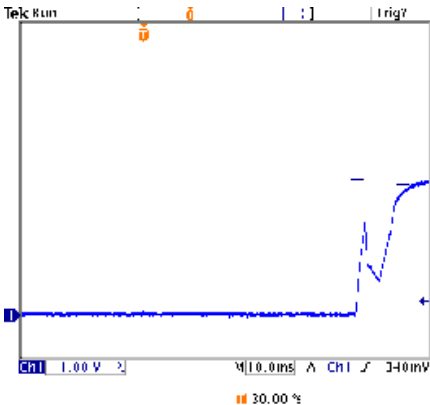
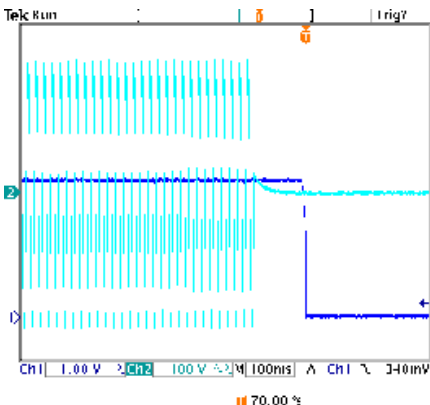
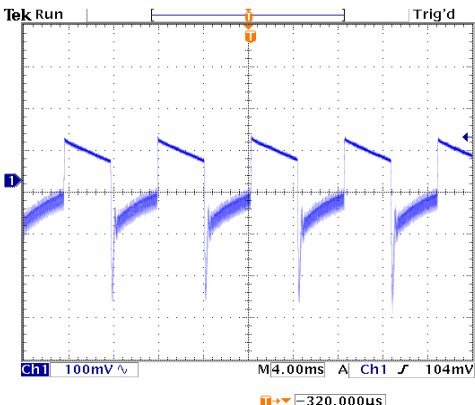
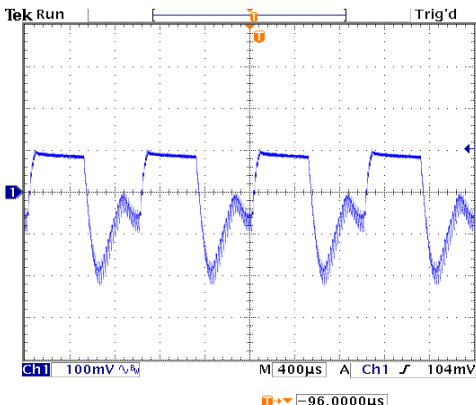
Safety Test
E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

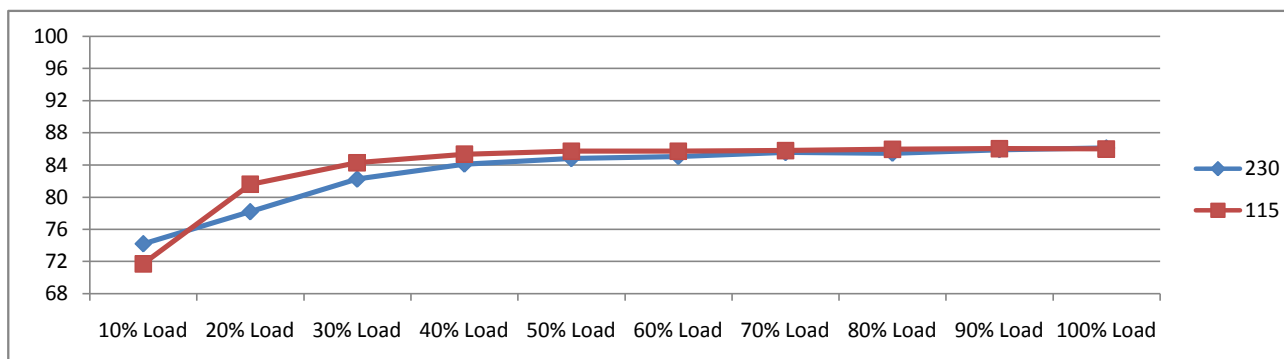
DESIGN VERIFY TEST OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 80VAC / 264VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.30% ~ -0.30%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 100VAC / 264VAC O/P: FULL LOAD TA : 25°C	V1: 0.00% ~ 0.00%
4	LOAD REGULATION(MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25°C	V1: 0.00% ~ -0.30%
5	OVER/UNDERSHOOT TEST	< ±15%	I/P : 230VAC O/P: FULL LOAD TA : 25°C	TEST< 3.0 %
6	RIPPLE & NOISE(Max)	V1 : 150 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25°C	V1 : 62.4 mVp-p
		high frequency:		low frequency:
				
7	SET UP TIME (MAX.)	230VAC : 1500ms 115VAC : 1500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25°C	230VAC : 256ms 115VAC : 184ms
		INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage
				

8	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 11.2ms 115VAC : 14.6ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 			
9	HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 10ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 120.0ms 115VAC : 20.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 			
10	DYNAMIC LOAD	V1 : 990 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA: 25°C	V1: (1). 404mv (2). 326mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ 			
	FULL /MIN% LOAD 50%DUTY / 1KHZ 			

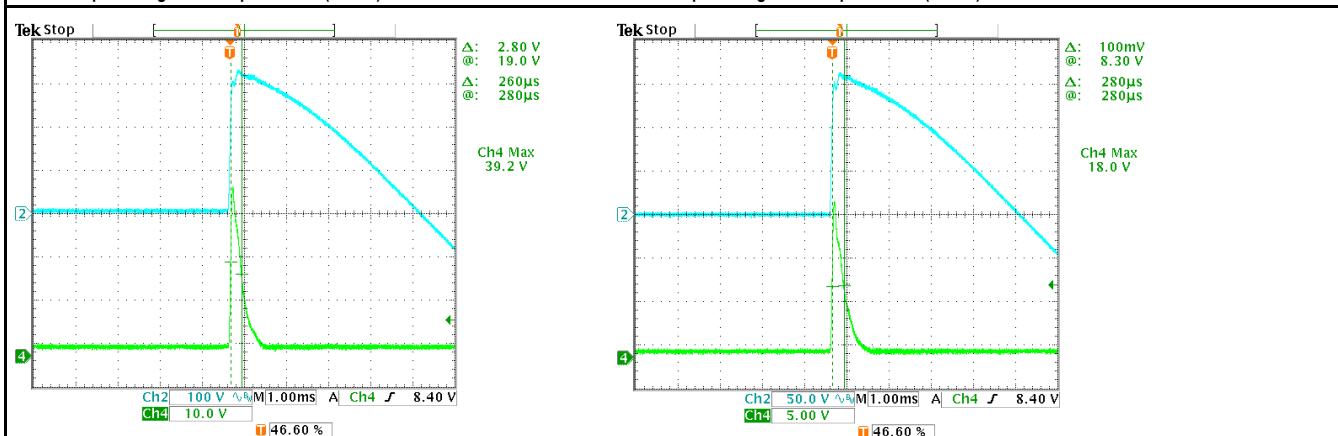
INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	75.0VAC ~ 264VAC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 440HZ NO DAMAGE	I/P : 80VAC ~ 264VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	INPUT CURRENT (TYP.)	0.3 / 230VAC 0.6 / 115VAC	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 0.1377 / 230VAC I= 0.2164 / 115VAC
4	LEAKAGE CURRENT	< 80.00μA	I/P : 264VAC O/P : MIN LOAD TA : 25°C	Touch current 49.5 μA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P : MIN LOAD TA : 25°C	< 0.0612 W
7	EFFICIENCY (TYP.)	83.5%	I/P : 230VAC O/P : FULL LOAD TA : 25°C	86.12 %



8	INRUSH CURRENT (TYP.)	45A / 230VAC 20A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P : FULL LOAD TA : 25°C	I= 39.2A / 230VAC I= 18.0A / 115VAC T50= 260.0us / 230VAC
---	-----------------------	--	--	---

INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/50HZ @ FULL LOAD
CH2 : AC Input Voltage CH4 : Input current (1V=1A) CH2 : AC Input Voltage CH4 : Input current (1V=1A)





15W High Reliable Green Medical Encapsulated Type MPM-15 series

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta: 25°C	133.49% 264VAC 129.03% 230VAC 122.09% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	3.80V ~ 5.00V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD Ta: 25°C	4.40V 264VAC 4.40V 230VAC 4.40V 80VAC Shut off o/p voltage
3	OVER TEMPERATURE PROTECTION	Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	U1 Rated : 800V 0.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	VIN: 267VAC VDS: (1). 520.00V (2). 490.00V (3). 518.00V
2	O/P MOSFET	Q100 Rated : 60V 84.0A 0 Rated : 0V 0.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	Q100 VDS : (1). 28.40V (2). 25.60V (3). 28.40V
3	Input Capacitor	C5 Rated : 33uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta : 25°C	(1). 384.00V (2). 382.00V (3). 382.00V (4). 380.00V
4	Control IC	U1 Rated : 24V (max) 10.5 (min) U100 Rated : 27 -0.3	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25°C	U1 U100 (1). 21.20V 9.92V (2). 16.10V 3.84V (3). 19.90V 10.00V (4). 17.20V 6.52V
9	Clamp Diode	D1 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load (2)Full load continue Ta : 25°C	(1). 432.00V (2). 432.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta : 25°C	I/P-O/P: 0.89mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25°C/70%RH	I/P-O/P: 9999.0MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS
2	CONDUCTION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD / 50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 MEDICAL AIR: 15KV / Contact: 8KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT: 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	EN61000-4-5 L-N:1KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A

RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT			
1	TEMPERATURE RISE TEST	MODEL : MPM-15-3.3					
		1. ROOM AMBIENT BURN-IN : 1.0hrs					
		IP: 230VAC O/P: 100% LOAD TA= 18.1°C					
		2. HIGH AMBIENT BURN-IN : 1.0hrs					
		IP: 230VAC O/P: 100% LOAD TA= 60.1°C					
			NO. Positio ROOM AMBIENT 18.1°C HIGH AMBIENT Ta: 60.1°C				
		1 LF1	52.8°C	87.1°C			
		2 C6	57.6°C	91.9°C			
		3 C5	61.1°C	95.4°C			
		4 U1	84.5°C	113.5°C			
		5 T1	63.3°C	98.2°C			
		6 C105	52.8°C	90.3°C			
		7 Q100	65.5°C	103.1°C			
2	OVER LOAD BURN-IN TEST	NO DAMAGE	I/P : 230VAC	TEST : OK			
		1 HOUR (MIN)	O/P : 130.00% LOAD				
			Ta : 25°C				
		3	LOW TEMPERATURE TURN ON TEST		NO DAMAGE	I/P : 264VAC / 100VAC	TEST : OK
					1 HOUR (MIN)	O/P : FULL LOAD	
					Ta : -40.0°C		
		4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST		AFTER 12 HOURS IN CHAMBER ON CONTROL 55°C	I/P : 272VAC	TEST : OK
	O/P : FULL LOAD						
NO DAMAGE	Ta : 55°C HUMIDITY= 95.0% RH						
5	TEMPERATURE COEFFICIENT	±0.03% /(0°C~60°C)	I/P : 230VAC	±0.0095% /(0°C~60°C)			
			O/P : FULL LOAD				
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -50°C~+125°C		TEST : OK			
		2. Temperature change rate : 25°C / MIN					
7	THERMAL SHOCK TEST	3. Dwell time low and high temperature : 30 MIN/EACH		TEST : OK			
		4. Total test cycle : 100 CYCLE					
		5. Input/Output condition : STATIC					
		1. Thermal shock Temperature : -45°C ~ +60°C					
		2. Temperature change rate : 25°C / MIN					
		3. Dwell time low and high temperature : 30 MIN/EACH					
		4. Total test cycle : 16 CYCLE					
5. Input/Output condition :							
		230VAC Full Load AC ON/OFF test turn on 3sec ; turn off 1sec @ 15CYCLE					
		230VAC Full Load AC ON turn on continue @ 1CYCLE					



15W High Reliable Green Medical Encapsulated Type MPM-15 series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (4) Acceleration : 2G (5) Test Time : 60 min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25.0°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 55.0°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 55.0°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 55.0°C LIFE TIME	(1). 263894.4 HRS (2). 45010.6 HRS (3). 77648.3 HRS (4). 112737.4 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1210K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 30000HRS @ TA 55°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ