



120W Compact Size and Wide Output Range Charger

NPB-120 series



Output connector: TB type



Output connector: AD1/XLR type



User's Manual



■ Features

- 90~264Vac universal AC input, built-in PFC
- Charger for compatible with lead-acid and li-ion batteries
- **Fanless design**
- **Wide adjustable output range by VR:**
 - ▶ Charging voltage adjustable(10.5~15.2V、21~30.4V、42~60.8V)
 - ▶ Charging current adjustable(50~100% rated current)
- 2 or 3 stage selectable by DIP S.W
- No load power consumption< 0.15W(AC S.W off)
- -30°C~+70°C wide operating temperature
- Protections: Short circuit / Over voltage /Over temperature / Battery reverse polarity protection
- Comply with UL/EN62368-1 and EN60335-1/2-29 **dual certification**
- Front panel LED indicator for charging status
- 3 years warranty

■ Description

NPB-120 series is a 120W charger for compatible with lead-acid (Flooded, Gel, AGM) and li-ion(Lithium iron, lithium manganese) batteries. This product is a class I power unit (with FG), equipped with a standard IEC320-C14 AC inlet and two or three-stage charging control. The entire series supplies different models with output voltages ranging between 10.5VDC and 60.8VDC that can satisfy the demands for various types of batteries devices.

■ Model Encoding

NPB - 120 - 24 XLR

- Output connector type
(other options available by customers requested, please refer to page 6)
- Nominal voltage (14.4V/28.8V/57.6V)
- Rated wattage
- Series name

■ Applications

- Radio system backup solution
- Electric scooter charger
- Camping car 、 Buses 、 Heavy duty truck 、 Specialty vehicles
- Surveillance system
- Portable power tools

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

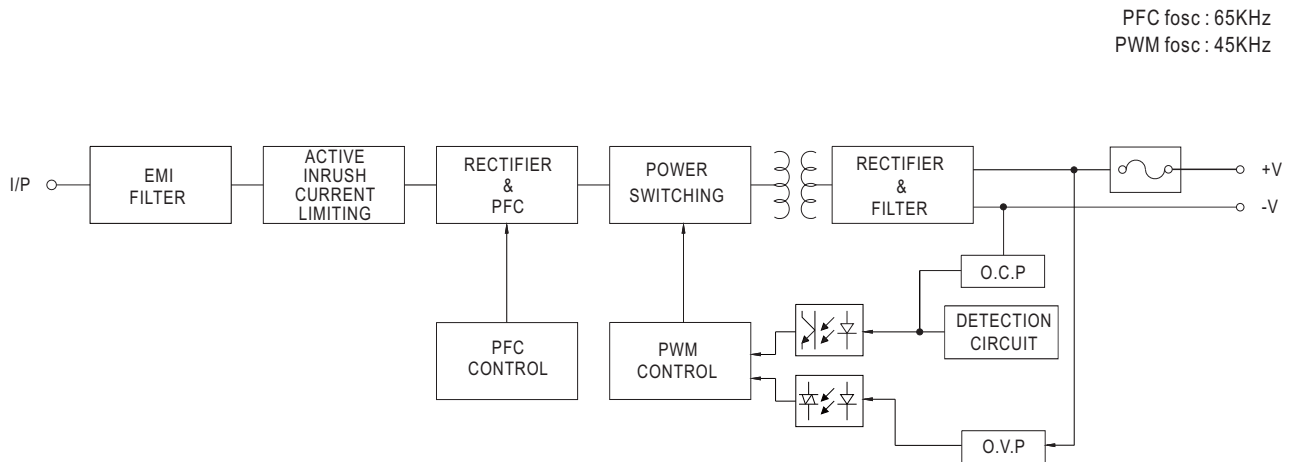


Type	Output Connector	Safety	Note
XLR	3 pin power pin 		In Stock
AD1	Anderson Equivalent Connector 	(48V UL certificated same as TB Type)	In Stock
TB	Terminal Block 		In Stock


SPECIFICATION

MODEL		NPB-120-12□		NPB-120-24□		NPB-120-48□			
		□ =XLR, AD1, TB							
OUTPUT	BOOST CHARGE VOLTAGE(Vboost)(default)	14.4V		28.8V		57.6V			
	FLOAT CHARGE VOLTAGE(Vfloat)(default)	13.8V		27.6V		55.2V			
	VOLTAGE ADJUSTABLE RANGE	10.5 ~ 15.2V		21 ~ 30.4V		42 ~ 60.8V			
	OUTPUT CURRENT(Typ.) Note.5	6.8A		4A		2A			
	CURRENT ADJUSTABLE RANGE	50% ~ 100%							
	MAX. POWER Note.3	103.4W		121.6W		121.6W			
	RECOMMENDED BATTERY CAPACITY (AMP HOURS) Note.4	20 ~ 90AH		15 ~ 50AH		7 ~ 25AH			
LEAKAGE CURRENT FROM BATTERY (Typ.)		<1mA							
INPUT	VOLTAGE RANGE Note.5	90 ~ 264VAC 127 ~ 370VDC							
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.92/230VAC@12V,PF>0.93/230VAC@24/48V at full load							
	EFFICIENCY (Typ.)	XLR	86.5%		89%		90.5%		
		AD1	86.5%		89%		90.5%		
		TB	87%		89.5%		90.5%		
	AC CURRENT (Typ.)	1.5A/115VAC 0.8A/230VAC							
INRUSH CURRENT (Typ.)	COLD START 55A at 230VAC								
LEAKAGE CURRENT		<0.75mA/240VAC							
PROTECTION	SHORT CIRCUIT Note.6	Protection type : Constant current limiting, charger will shutdown after 5 sec, re-power on to recover							
	OVER VOLTAGE	16 ~ 20V		32 ~ 40V		64 ~ 75V			
		Protection type : Shut down and latch off o/p voltage, re-power on to recover							
	REVERSE POLARITY	By internal fuse open							
OVER TEMPERATURE		Hiccup mode, recovers automatically after temperature goes down							
FUNCTION	CHARGING CURVE	2 or 3 stage adjustable by DIP S.W							
ENVIRONMENT	WORKING TEMP.	-30 ~ +70℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT	±0.05%/℃ (0 ~ 45℃)							
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes							
SAFETY & EMC (Note 7)	SAFETY STANDARDS	CB IEC62368-1,IEC60335-1/2-29, Dekra BS EN/EN62368-1,BS EN/EN60335-1/2-29, UL62368-1, AS/NZS60335-1/2-29, J62368-1(2020) (except for 48XLR & TB type),EAC TP TC 004 approved							
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC							
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH							
	EMC EMISSION	Parameter	Standard		Test Level / Note				
		Conducted	BS EN/EN55032 (CISPR32),BS EN/EN55014-1		Class B				
		Radiated	BS EN/EN55032 (CISPR32),BS EN/EN55014-1		Class B				
		Harmonic Current	BS EN/EN61000-3-2		Class A				
		Voltage Flicker	BS EN/EN61000-3-3		-----				
	EMC IMMUNITY	BS EN/EN55014-2,BS EN/EN55024,BS EN/EN55035,J55032(H29) (except for 48XLR & TB type)							
		Parameter	Standard		Test Level / Note				
		ESD	BS EN/EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact				
		Radiated	BS EN/EN61000-4-3		Level 2, 3V/m				
		EFT / Burst	BS EN/EN61000-4-4		Level 2, 1KV				
		Surge	BS EN/EN61000-4-5		Level 2, 1KV/Line-Line,Level 3, 2KV/Line-Earth				
		Conducted	BS EN/EN61000-4-6		Level 2, 3Vrms				
		Magnetic Field	BS EN/EN61000-4-8		Level 1, 1A/m				
		Voltage Dips and Interruptions	BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods				
OTHERS	MTBF	1895.4K hrs min. Telcordia TR/SR-332 (Bellcore) ; 225.8K hrs min. MIL-HDBK-217F (25℃)							
	DIMENSION	182.7*96*49mm (L*W*H)							
	PACKING	1.3Kg; 10pcs/ 14Kg / 1.13CUFT							
NOTE	1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details. 2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 3. Refer to derating curve. 4. This is MEAN WELL's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation. 5. Derating may be needed under low input voltages. Please check the derating curve for more details. 6. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 7. The charger is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx								


Block Diagram



Derating Curve

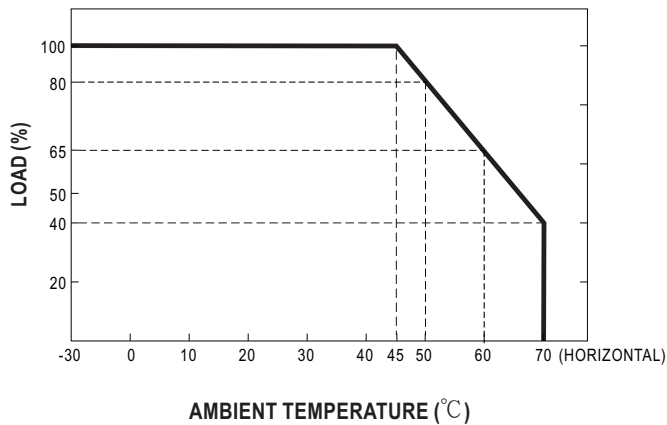

Static Characteristics

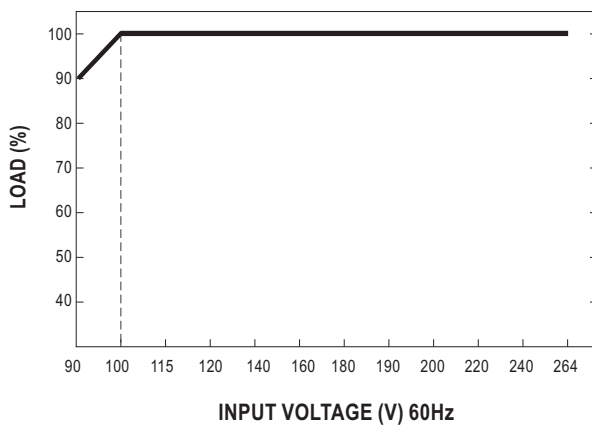


Function Manual

1. Charging Curve


1-1 2 or 3 stage selectable by DIP S.W

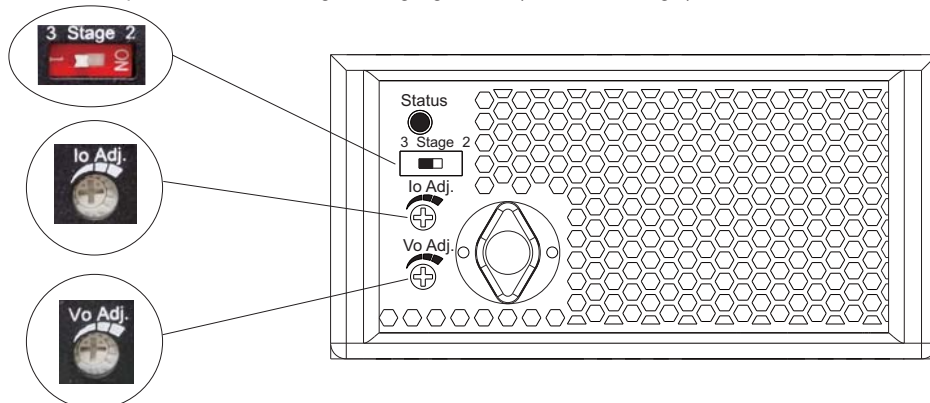※ This series provides 2 or 3 stage charging curve. (Default 3 stage)




1-2 Charging Curve by DIP S.W

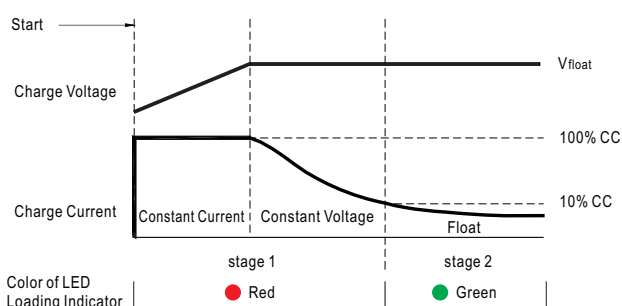◎ 2 stage charging curve



◎ 3 stage charging curve

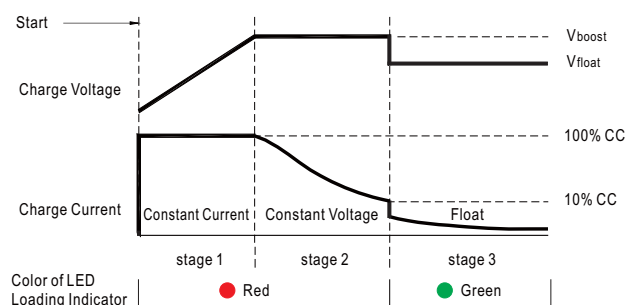

◎ 2 stage charging cure is suitable for Li-ion batteries (lithium iron and lithium manganese),

3 stage charging cure is suitable for lead-acid batteries (flooded, Gel and AGM).

2. Charging voltage adjustable by VR

Model	NPB-120-12 ☐	NPB-120-24 ☐	NPB-120-48 ☐
Output voltage adjustable range	10.5~15.2V	21~30.4V	42~60.8V



3. Charging current adjustable by VR

Model	NPB-120-12 ☐	NPB-120-24 ☐	NPB-120-48 ☐
Output current adjustable range	3.4~6.8A	2~4A	1~2A



4. Front panel LED indicators & Corresponding signal at function pins

LED	Description
Green	Float (stage 3) or Battery full
Red	Charging (stage 1 or stage 2)

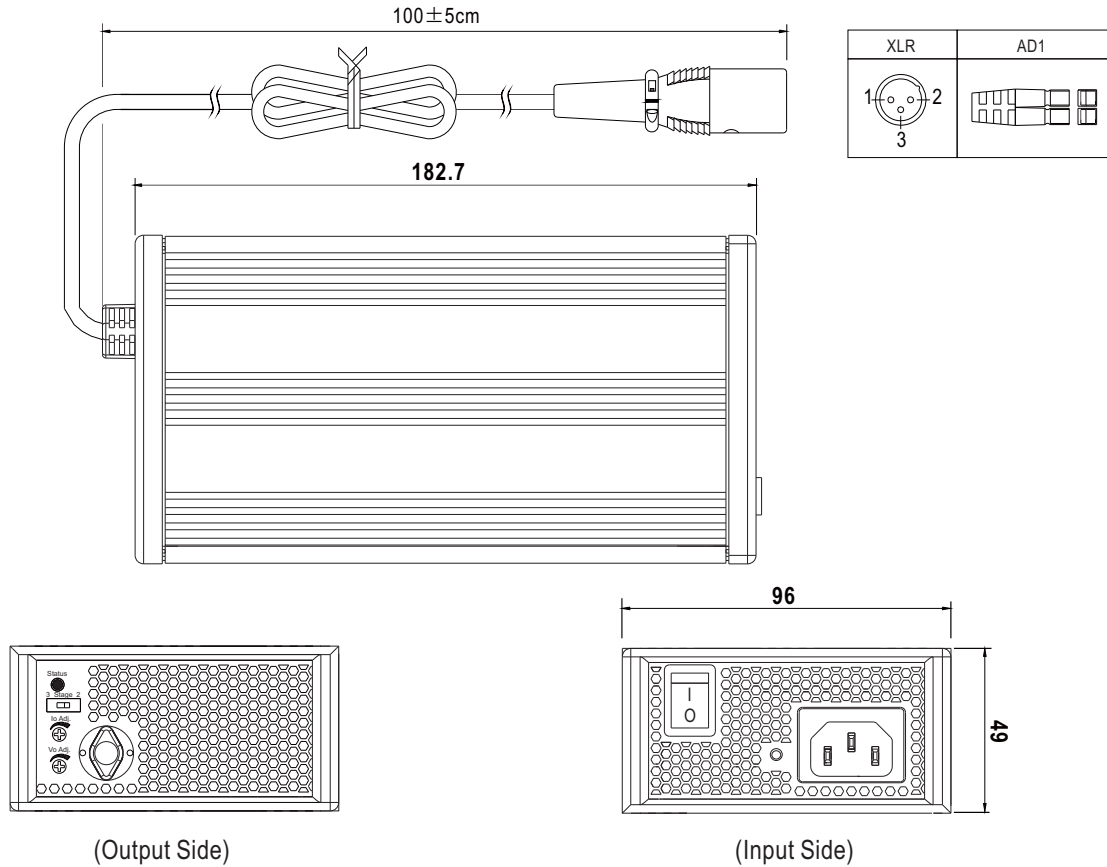


Mechanical Specification


◎ NPB-120-xx XLR/AD1 (Cable Type)

Case No. PS-120F

Unit:mm



◎ NPB-120-xx TB (Terminal Block Type)


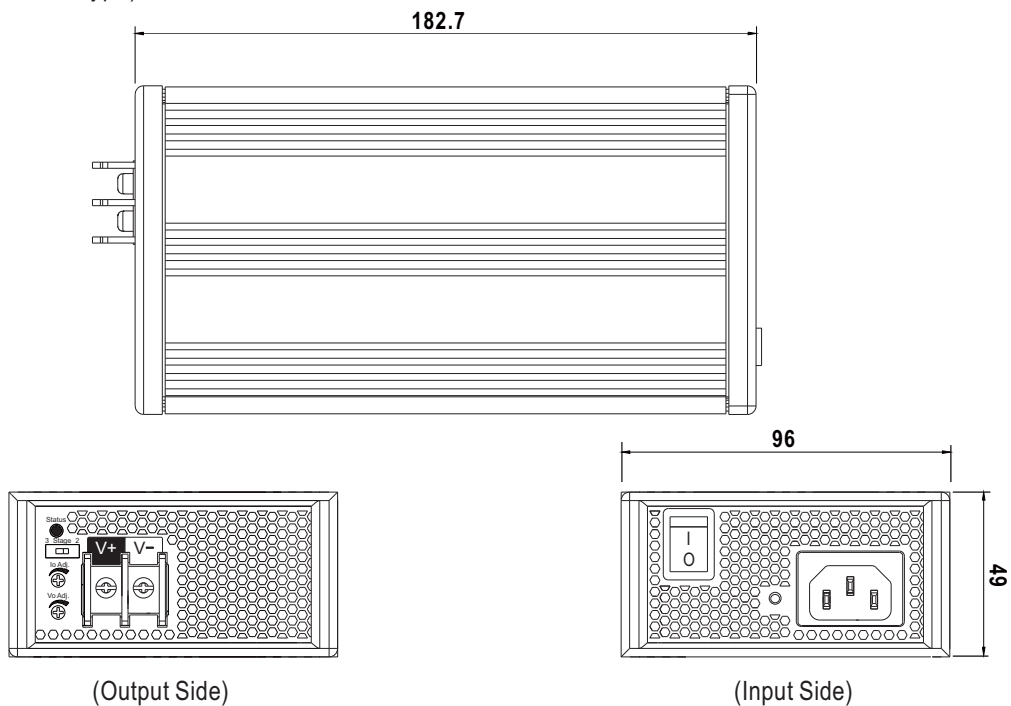


■ Accessory List

※ Bracket (Optional accessory, Should ordered separately)

MW's Order No.	Item	Quantity
DGG2MHS012D		4pcs/per model

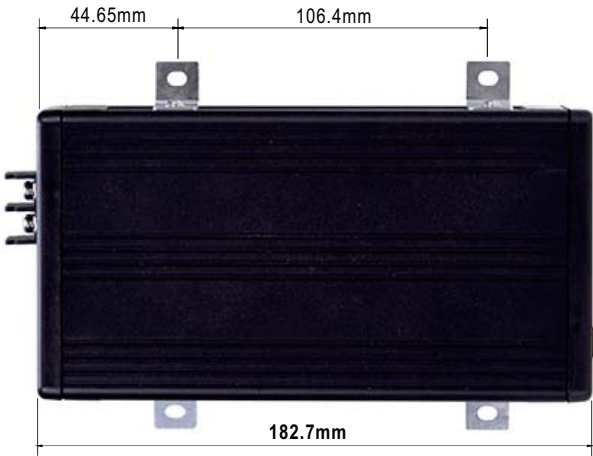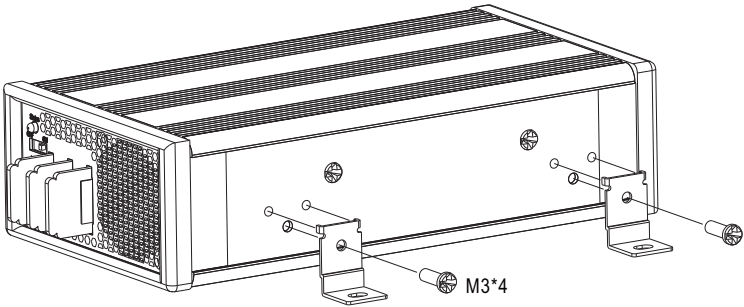■ Installation Diagram



■ Plug Assignment

◎ Standard Output Connector

3pin XLR		
UNICABLE 89M103-3P or equivalent		
PIN NO.	OUTPUT	
1	+V	
2,3	-V	














AD1		
housing: Anderson 1327(red), 1327G6(black) equivalent contacts: Anderson 261G2 (45A) equivalent		
Red(+V)		Black(-V)



TB		
DT-66-B11W-02 or equivalent Rating: 300V 40A		
+V		-V



◎ Optional DC plug: (Available in customized)

Min. DIN 4 Pin with Lock (male)	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
   KYCON KPPX-4P equivalent	R7B	1	+Vo
		2	-Vo
		3	-Vo
		4	+Vo
DIN 4 Pin XLR	Type No.	Pin Assignment	
		PIN No.	Output(<10A)
  	XLR4	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo
DIN 3 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
  	D3P	1	+Vo
		2	-Vo
		3	-Vo
DIN 2 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<5A)
  	D2P	1	-Vo
		2	+Vo
DIN 3 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<10A)
  	INL3	N	+Vo
		L	-Vo
AMP 1-480702-0 (6.35mm) equivalent	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
   FG not connected to output connector	C4P	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>