



Test Report: NGE18U24-P1J

18W AC-DC Reliable Interchangeable Type Green
Adaptor

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

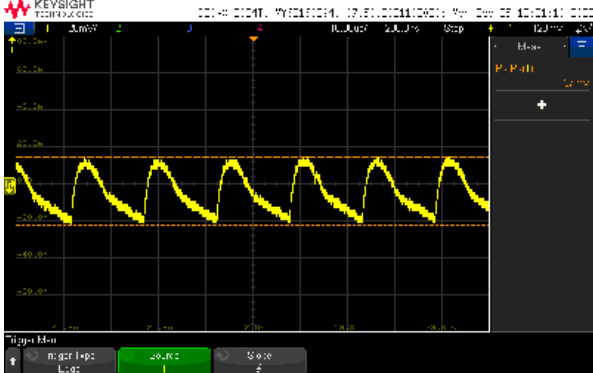
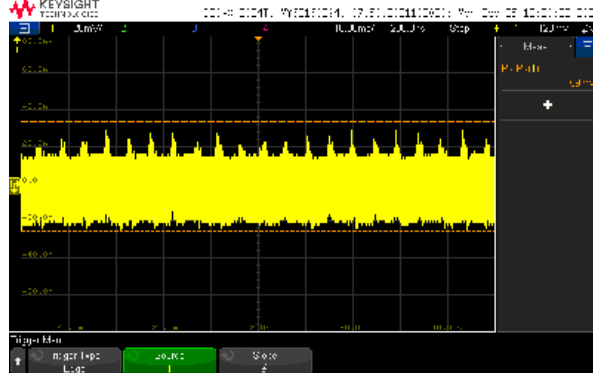
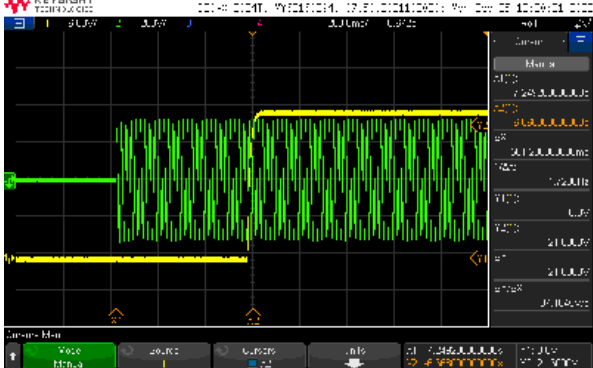
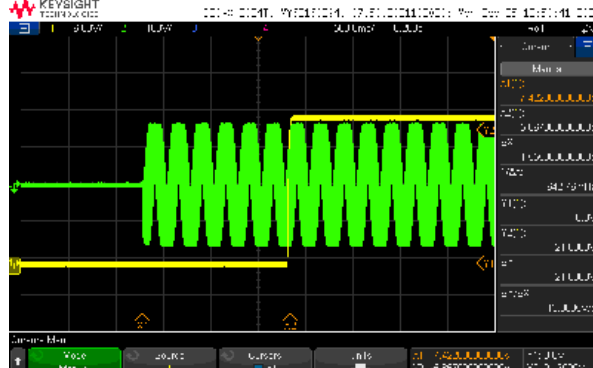
E.M.C. Test

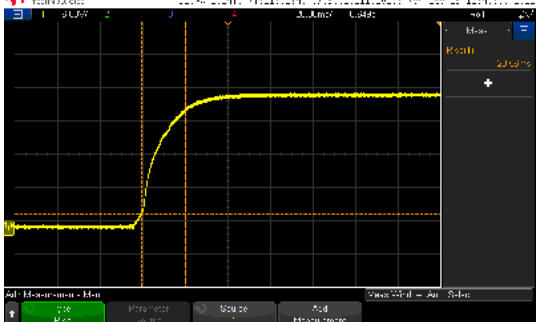
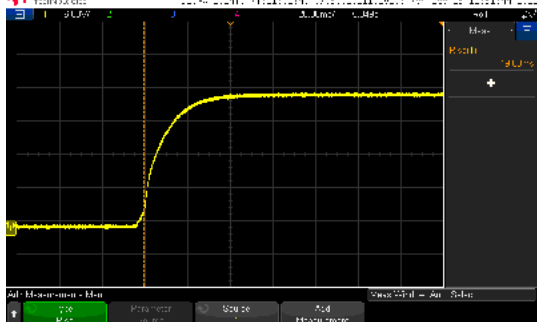
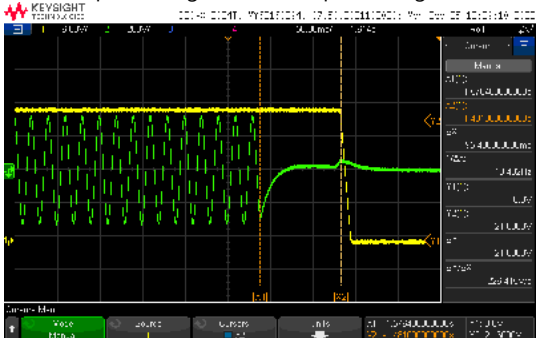
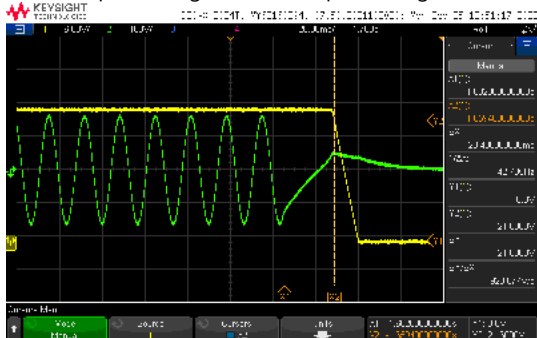
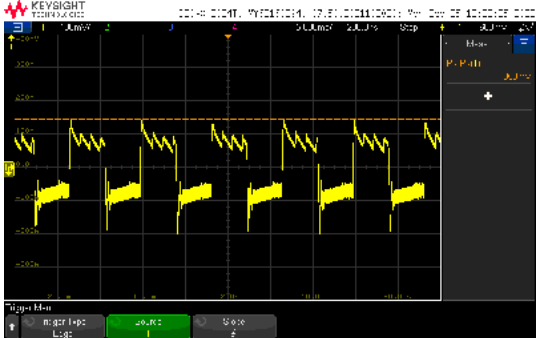
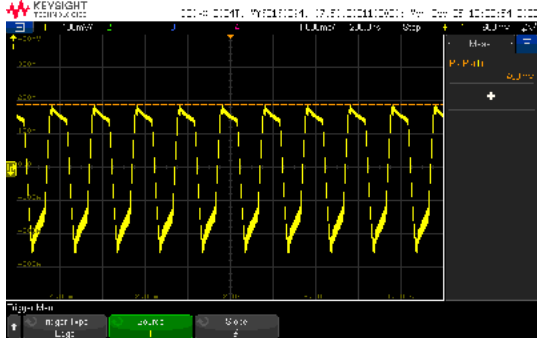
■ RELIABILITY TEST

ENVIRONMENT TEST


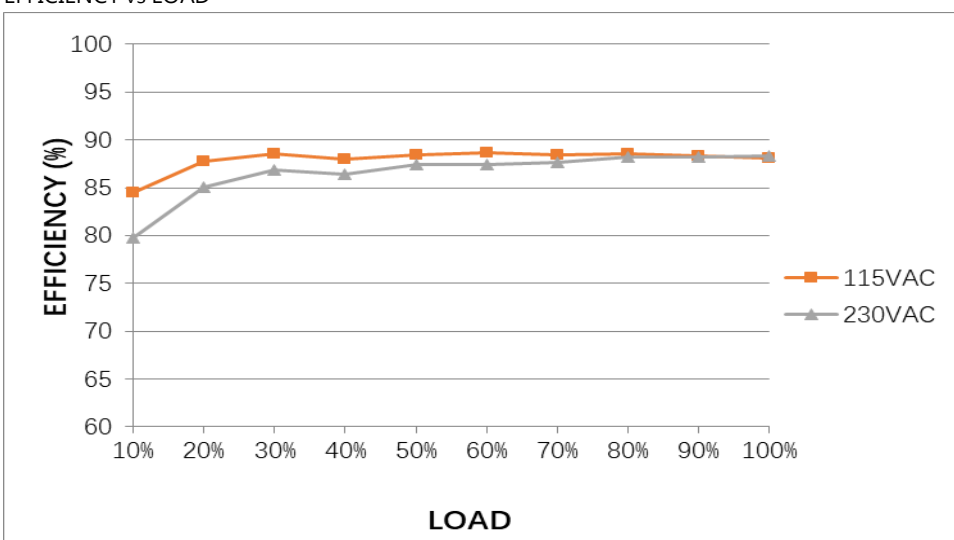
DESIGN VERIFY TEST

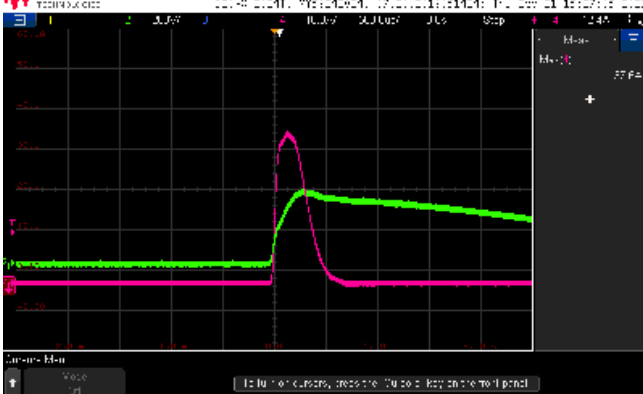
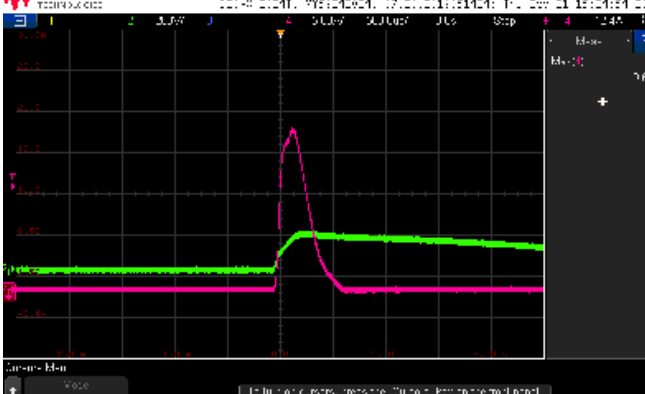
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE	V1: -3% ~ +3%	I/P: 80VAC~264VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.151%~0.1505%
2	LINE REGULATION	V1: -1% ~ +1%	I/P: 80VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0%~0.067%
3	LOAD REGULATION	V1: -3% ~ +3%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.151%~0.1505%
4	OVER/UNDERSHOOT TEST	<± 5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	2.1%
5	RIPPLE & NOISE (Max)	V1: 240mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 37mVp-p / high frequency 59mVp-p / low frequency
high frequency :  low frequency : 				
6	SET UP TIME(Max)	230VAC/1500ms 115VAC/3000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 581.2 ms 115VAC/ 1555.8 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage  INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 				

7	RISE TIME (Max)	230VAC/30ms 115VAC/30ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 20.56 ms 115VAC/ 19.63ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage				
8	HOLD UP TIME (Typ.)	230VAC/30ms 115VAC/10ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 95.4 ms 115VAC/ 23.4 ms
INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage				
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage				
9	DYNAMIC LOAD	V1: 2400mVp-p	I/P: 230VAC O/P: (1) FULL/0% LOAD 50%DUTY/ 120HZ (2) FULL/0% LOAD 50%DUTY / 1KHZ Ta:25°C	350mVp-p 450mVp-p
FULL /0% LOAD 50%DUTY / 120HZ				
FULL /0% LOAD 50%DUTY / 1KHZ				
10	TRANSIENT RECOVERY TIME	V1: 2400mVp-p < 500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	189mVp-p 0us

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC~264VAC 113VDC~ 370VDC 	(1) I/P: TESTING O/P: FULL LOAD/ 80% LOAD (2) I/P: DC TESTING (L: + N:-) O/P: FULL LOAD/ 80% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL LOAD/ 80% LOAD Ta:25°C I/P: HIGH-LINE+15%=300 V O/P:FULL LOAD /MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	(1) 71.6V~264V/ FULL LOAD 68.6V~264V/ 80% LOAD (2) 98.5Vdc~370Vdc/FULL LOAD 98.5Vdc~370Vdc/80% LOAD (3) 98.5Vdc~370Vdc/FULL LOAD 98.5Vdc~370Vdc/80% LOAD TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:80 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.25A 115V/ 0.4A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.2078A/ 230VAC I =0.3268A/ 115VAC
4	LEAKAGE CURRENT	Touch current : < 100uA / 264 VAC	I/P : 264 VAC O/P : Min LOAD Ta : 25°C	48.7uA
5	NO LOAD CONSUMPTION	< 0.075W/240V	I/P : 240VAC O/P : NO LOAD Ta : 25°C	0.0613W
6	EFFICIENCY(Typ.)	88%	I/P:230VAC O/P:FULL LOAD Ta:25°C	88.36%/230VAC
EFFICIENCY vs LOAD 				

7	INRUSH CURRENT(Typ.)	230V/80A 115V/40A COLD START	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =37.6A/ 230VAC I =19.6A/ 115VAC T50= 310us/230V
INPUT=230VAC/50HZ @ FULL LOAD CH1: AC Input Voltage CH4: Input current KEYSIGHT TECHNOLOGIES  INPUT=115VAC/ 60HZ @ FULL LOAD CH1: AC Input Voltage CH4: Input current KEYSIGHT TECHNOLOGIES 				

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																		
1	OVER LOAD PROTECTION	110%~150% Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	133.3%/264VAC 134.4%/230VAC 129.3%/100VAC Protection type: Hiccup mode, recovers automatically after fault condition is removed																		
2	OVER VOLTAGE PROTECTION	115%~140% rated output voltage Protection type: Clamp by zener diode <table><tr><td>5V_o</td><td>9V_o</td><td>12V_o</td><td>15V_o</td><td>18V_o</td><td>24V_o</td></tr><tr><td>80mA</td><td>50mA</td><td>35mA</td><td>30mA</td><td>25mA</td><td>20mA</td></tr><tr><td>max</td><td>max</td><td>max</td><td>max</td><td>max</td><td>max</td></tr></table>	5V _o	9V _o	12V _o	15V _o	18V _o	24V _o	80mA	50mA	35mA	30mA	25mA	20mA	max	max	max	max	max	max	I/P: TESTING O/P: MIN LOAD Ta:25°C	28.5V(DC Source 限流 26mA) Protection type: Clamp by zener diode
5V _o	9V _o	12V _o	15V _o	18V _o	24V _o																	
80mA	50mA	35mA	30mA	25mA	20mA																	
max	max	max	max	max	max																	
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE OK Protection type: Hiccup mode, recovers automatically after fault condition is removed																		

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated: 5.4A/ 700V	AC ON/OFF I/P: High-Line +3V =267V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	Q1 VDS: (1) 535V (2) 531V (3) 539V (4) 535V (5) 535V (6) 539V (7) 535V
2	Diode Peak Voltage	D100 Rated: 5A/150V	AC ON/OFF I/P: High-Line +3V =267 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	(1) 120.5V (2) 131.0V (3) 122.2V (4) 119.7V (5) 120.5V (6) 120.5V (7) 134.2V (8) 120.5V
3	Input Capacitor Voltage	C5 Rated: 27μ /400 V	I/P: High-Line +3V =267V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue Ta:25°C	(1) 374V (2) 378V (3) 378V (4) 374V
4	Control IC Voltage Test	PWM IC U3 Rated: 8V~ 26.5V	AC ON/OFF I/P: High-Line +3V =267 V O/P:(1) FULL LOAD (2) Output Short (3) O.L.P (4) NO LOAD VRmin (LOW LINE) Ta:25°C	U3 (1) 16.5V (2) 16.5V (3) 16.5V (4) 16.5V

5	Clamp Diode Peak Voltage	D5 Rated : 600V/1A	AC ON/OFF I/P : High-Line +3V = 267 V O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue Ta : 25°C	(1) 486V (2) 502V
---	--------------------------	--------------------------	---	----------------------

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min	I/P-O/P: 4.4 KVAC/min Ta:25°C	I/P-O/P: 0.792 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 600 VDC Ta:25°C	I/P-O/P: 50 GΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32)/EN55011,FCC Part15,CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32)/EN55011,FCC Part15,CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 ■ MEDICAL/Adaptor AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 ■ MEDICAL/Adaptor L-N : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	BS EN/EN61000-4-5 ■ MEDICAL/Adaptor L-N : 1KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																																												
1	TEMPERATURE RISE TEST	MODEL : NGE18U24-P1J 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 27.0 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 44.9 °C <table><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 27.0°C</th><th>HIGH AMBIENT Ta= 44.9°C</th></tr><tr><td>1</td><td>D2</td><td>59.6°C</td><td>75.7°C</td></tr><tr><td>2</td><td>C8</td><td>79.0°C</td><td>94.6°C</td></tr><tr><td>3</td><td>D5</td><td>84.7°C</td><td>100.3°C</td></tr><tr><td>4</td><td>BD1</td><td>67.2°C</td><td>83.1°C</td></tr><tr><td>5</td><td>RTH1</td><td>59.0°C</td><td>74.9°C</td></tr><tr><td>6</td><td>LF1</td><td>55.5°C</td><td>72.2°C</td></tr><tr><td>7</td><td>L1</td><td>63.7°C</td><td>79.7°C</td></tr><tr><td>8</td><td>D100</td><td>88.2°C</td><td>103°C</td></tr><tr><td>9</td><td>Q1</td><td>93.2°C</td><td>108.8°C</td></tr><tr><td>10</td><td>R7</td><td>78.8°C</td><td>94.5°C</td></tr><tr><td>11</td><td>R8</td><td>80.7°C</td><td>95.9°C</td></tr><tr><td>12</td><td>C49</td><td>83.4°C</td><td>98.4°C</td></tr><tr><td>13</td><td>U2</td><td>65.7°C</td><td>81.1°C</td></tr><tr><td>14</td><td>C1</td><td>51.3°C</td><td>68.1°C</td></tr><tr><td>15</td><td>C5</td><td>65.5°C</td><td>81.0°C</td></tr><tr><td>16</td><td>C40</td><td>60.3°C</td><td>76.6°C</td></tr><tr><td>17</td><td>U3</td><td>80.1°C</td><td>95.5°C</td></tr><tr><td>18</td><td>R40</td><td>67.5°C</td><td>83.7°C</td></tr><tr><td>19</td><td>R42</td><td>76.9°C</td><td>92.5°C</td></tr><tr><td>20</td><td>R102</td><td>86.0°C</td><td>103.1°C</td></tr><tr><td>21</td><td>C102</td><td>82.7°C</td><td>97.5°C</td></tr><tr><td>22</td><td>C105</td><td>69.5°C</td><td>84.8°C</td></tr><tr><td>23</td><td>C106</td><td>65.4°C</td><td>80.8°C</td></tr><tr><td>24</td><td>T1 coil</td><td>74.9°C</td><td>90.4°C</td></tr><tr><td>25</td><td>T1 core</td><td>70.8°C</td><td>86.0°C</td></tr><tr><td>26</td><td>CASE</td><td>49.5°C</td><td>67.2°C</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 27.0°C	HIGH AMBIENT Ta= 44.9°C	1	D2	59.6°C	75.7°C	2	C8	79.0°C	94.6°C	3	D5	84.7°C	100.3°C	4	BD1	67.2°C	83.1°C	5	RTH1	59.0°C	74.9°C	6	LF1	55.5°C	72.2°C	7	L1	63.7°C	79.7°C	8	D100	88.2°C	103°C	9	Q1	93.2°C	108.8°C	10	R7	78.8°C	94.5°C	11	R8	80.7°C	95.9°C	12	C49	83.4°C	98.4°C	13	U2	65.7°C	81.1°C	14	C1	51.3°C	68.1°C	15	C5	65.5°C	81.0°C	16	C40	60.3°C	76.6°C	17	U3	80.1°C	95.5°C	18	R40	67.5°C	83.7°C	19	R42	76.9°C	92.5°C	20	R102	86.0°C	103.1°C	21	C102	82.7°C	97.5°C	22	C105	69.5°C	84.8°C	23	C106	65.4°C	80.8°C	24	T1 coil	74.9°C	90.4°C	25	T1 core	70.8°C	86.0°C	26	CASE	49.5°C	67.2°C
NO	Position	ROOM AMBIENT Ta= 27.0°C	HIGH AMBIENT Ta= 44.9°C																																																																																																													
1	D2	59.6°C	75.7°C																																																																																																													
2	C8	79.0°C	94.6°C																																																																																																													
3	D5	84.7°C	100.3°C																																																																																																													
4	BD1	67.2°C	83.1°C																																																																																																													
5	RTH1	59.0°C	74.9°C																																																																																																													
6	LF1	55.5°C	72.2°C																																																																																																													
7	L1	63.7°C	79.7°C																																																																																																													
8	D100	88.2°C	103°C																																																																																																													
9	Q1	93.2°C	108.8°C																																																																																																													
10	R7	78.8°C	94.5°C																																																																																																													
11	R8	80.7°C	95.9°C																																																																																																													
12	C49	83.4°C	98.4°C																																																																																																													
13	U2	65.7°C	81.1°C																																																																																																													
14	C1	51.3°C	68.1°C																																																																																																													
15	C5	65.5°C	81.0°C																																																																																																													
16	C40	60.3°C	76.6°C																																																																																																													
17	U3	80.1°C	95.5°C																																																																																																													
18	R40	67.5°C	83.7°C																																																																																																													
19	R42	76.9°C	92.5°C																																																																																																													
20	R102	86.0°C	103.1°C																																																																																																													
21	C102	82.7°C	97.5°C																																																																																																													
22	C105	69.5°C	84.8°C																																																																																																													
23	C106	65.4°C	80.8°C																																																																																																													
24	T1 coil	74.9°C	90.4°C																																																																																																													
25	T1 core	70.8°C	86.0°C																																																																																																													
26	CASE	49.5°C	67.2°C																																																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 127% LOAD Ta : 25°C	TEST : OK																																																																																																												

3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 264VAC/100VAC O/P : 100% LOAD Ta= -35 °C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C/95 %R.H NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 45 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C(0~45°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.012 %/°C(0~45°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-30~45°C	1. Thermal shock Temperature : -35°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 45 °C LIFE TIME		(1) 109284.5 HRS (2) 32716.5 HRS (3) 56167.6 HRS (4) 100655.3 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 1272.8 Khrs min. MIL-HDBK-217F (25°C) 7192.4 Khrs min. Telcordia TR/SR-332(Bellcore) (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : 80% LOAD TA=50°C Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	YUWEI	LIUTT	WANGDZ

2020.10.1 TAG-QA-009